



# Keychron K1 Pro QMK-VIA Wireless Custom Mechanical Keyboard User Guide

[Home](#) » [Keychron](#) » Keychron K1 Pro QMK-VIA Wireless Custom Mechanical Keyboard User Guide 

## Contents

- [1 Keychron K1 Pro QMK-VIA Wireless Custom Mechanical Keyboard](#)
- [2 OVERVIEW](#)
- [3 CONNECTION](#)
- [4 SETTINGS](#)
- [5 FUNCTIONS](#)
- [6 Activate Siri / Cortana](#)
- [7 Warranty](#)
- [8 Factory Reset](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)




Keychron

**Keychron K1 Pro QMK-VIA Wireless Custom Mechanical Keyboard**




If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

## OVERVIEW

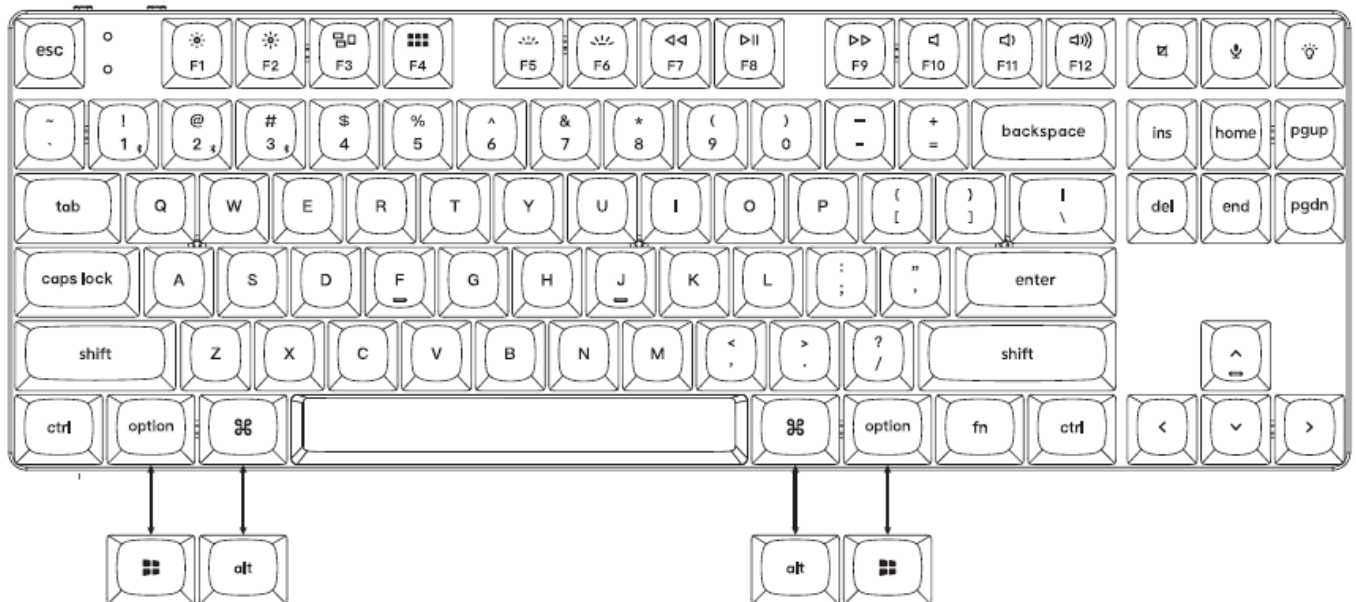


## CONNECTION

### Connect Bluetooth

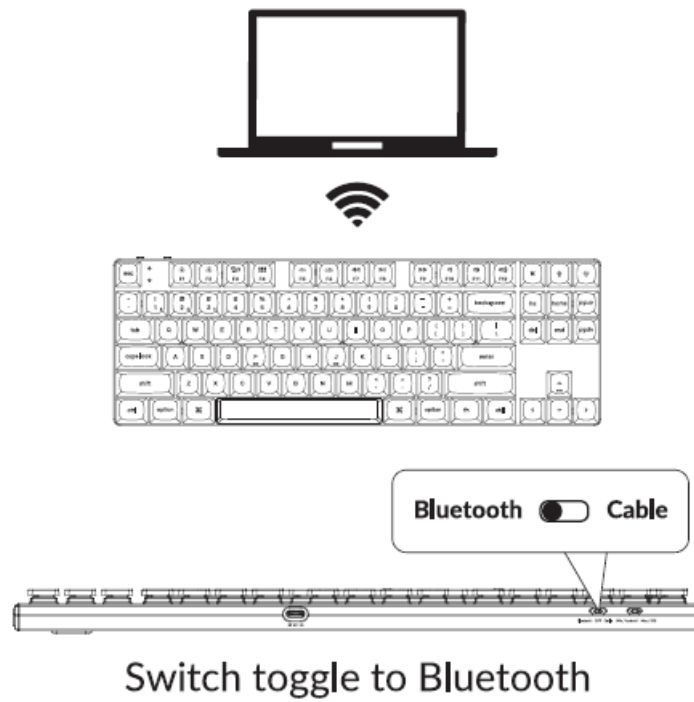

- Press fn + 1 (for 4 seconds) and pair with a device named Keychron K1 Pro.

### Connect Cable

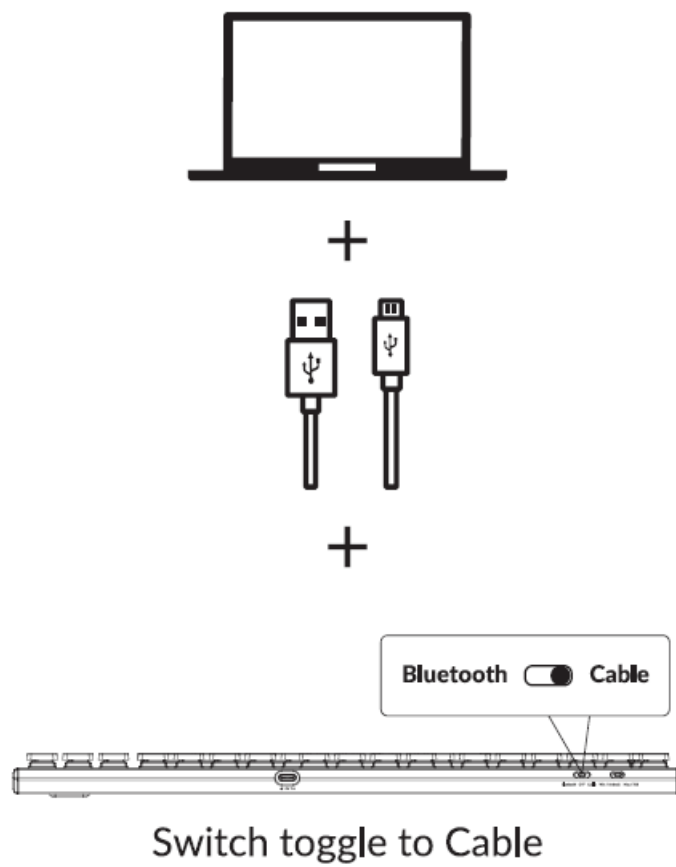


### The VIA Key Remapping Software



Please visit [caniusevia.com](https://caniusevia.com) to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction. (VIA only works when the keyboard is connected by wire to the computer.)

## SETTINGS


### The Layers

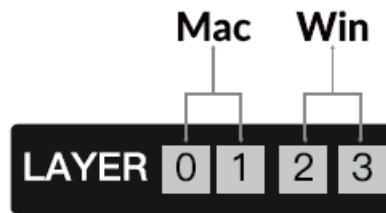

- There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.




- If your system toggle is switched to Mac, then the layer 0 will be activated.




- If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.

## FUNCTIONS

### The Backlight

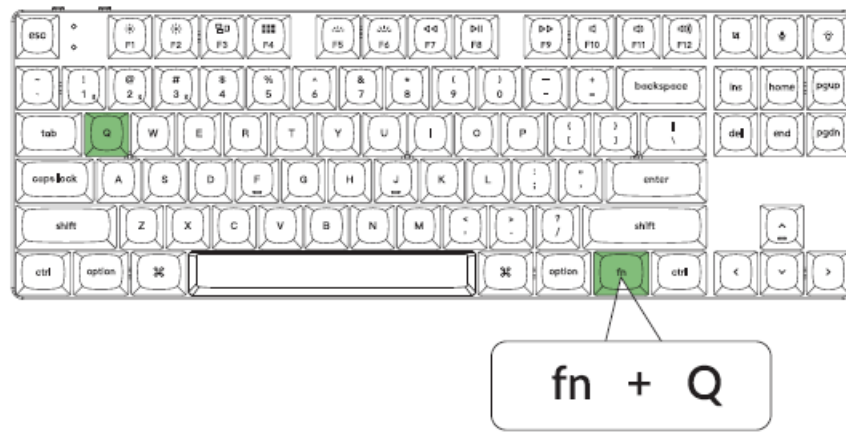


- Press fn + Q to change the lighting effect

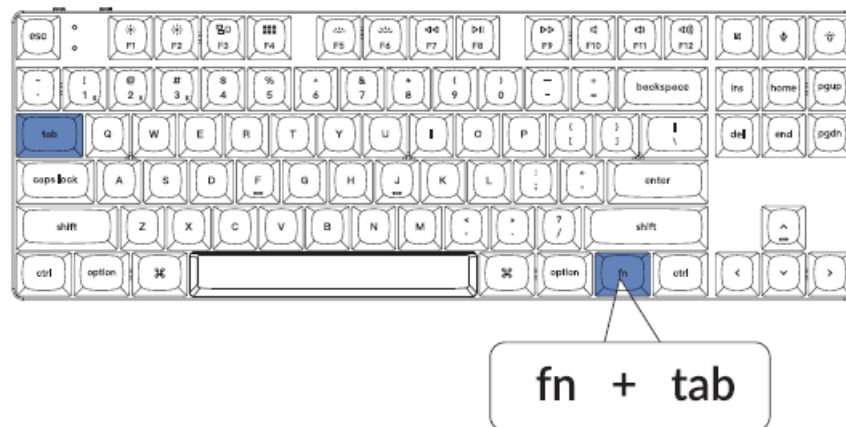


- Press fn + tab to turn the backlight on/off

### Adjust The Backlight Brightness

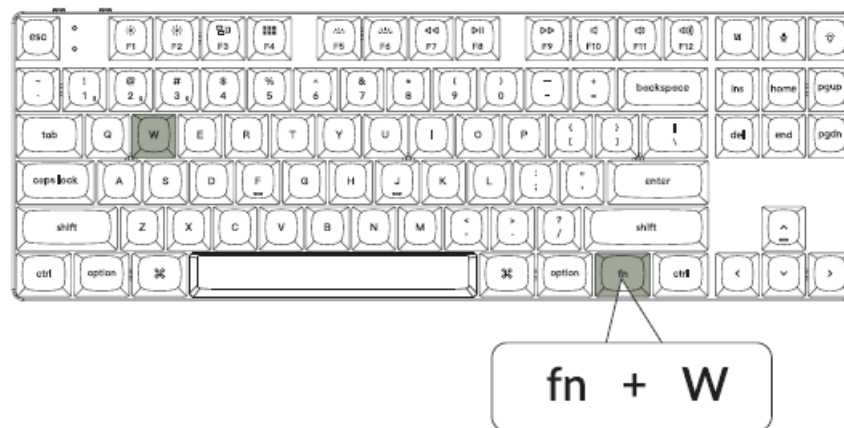

- Press fn + W to increase the backlight brightness

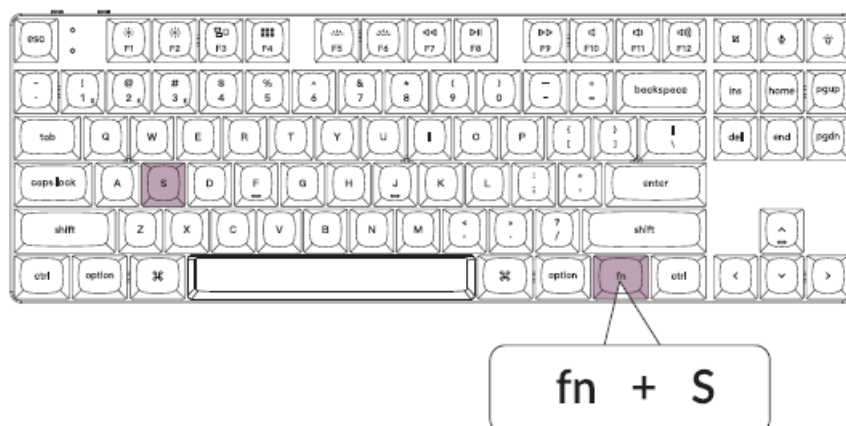


- Press fn + S to decrease the backlight brightness

## Activate Siri / Cortana



For Siri on Mac: Go to System preferences > Siri > select “Hold Command-Space” option. “Siri key only works on macOS and does not work on iOS.

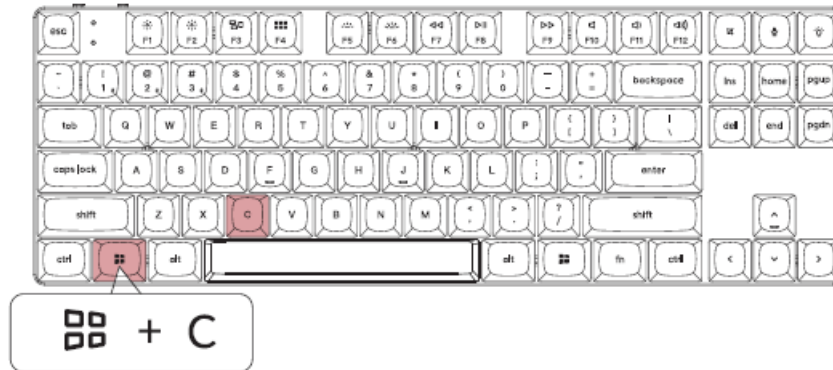

For Cortana on Windows: Select Start > Settings > Cortana and select the shortcut by pressing the Windows key + C key. “Windows Cortana is only available for Windows 10 and above OS. Cortana is only available in certain countries/regions and might not work everywhere.

## Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of the keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.

## Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.

## Factory Reset

### Troubleshooting? Don't know what's going on with the keyboard?

1. Plug in the power cable and switch the keyboard to Cable mode.
2. Factory reset the keyboard by pressing fn + J + Z (for 4 seconds).
3. Download the right firmware and QMK Toolbox from our website.
4. Switch the keyboard to OFF mode and remove the space bar keycap to find the reset button on the PCB.
5. Hold the reset key first, then switch the keyboard to Cable mode.
6. Release the reset key, and the keyboard will now enter DFU mode.
7. Flash the firmware with the QMK Toolbox.


- Factory reset the keyboard again by pressing fn + J + Z (for 4 seconds). \* Step by step guide can be found on

our website.

## Not Not Happy

- [support@keychron.com](mailto:support@keychron.com)

## Documents / Resources

	<a href="#">Keychron K1 Pro QMK-VIA Wireless Custom Mechanical Keyboard</a> [pdf] User Guide K1 Pro QMK-VIA Wireless Custom Mechanical Keyboard, K1 Pro, QMK-VIA Wireless Custom Mechanical Keyboard, Wireless Custom Mechanical Keyboard, Custom Mechanical Keyboard, Mechanical Keyboard, Keyboard
---	---

[Manuals+](#).