



Keychron K10 Wireless Mechanical Keyboard User Manual

[Home](#) » [Keychron](#) » Keychron K10 Wireless Mechanical Keyboard User Manual 



K10 Bluetooth Mechanical Keyboard

IN THE BOX: Keychron K10 Bluetooth Mechanical Keyboard x 1

Type-C Cable * 1

Manual * 1

Quick Start Guide * 1

Extra Keycaps Set * 1

Quick Start Guide If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows



Contents


- 1 connect Bluetooth
- 2 connect Cable
- 3 Change Light Effect
- 4 SWITCH BLUETOOTH DEVICES
- 5 BACKLIT SETTING
- 6 TROUBLESHOOTING
- 7 Documents / Resources
- 8 Related Posts

connect Bluetooth

1 Connect Bluetooth



Switch toggle to Bluetooth




Press fn + 1 (for 4 seconds) and pair with device named Keychron K10




fn + 1

connect Cable

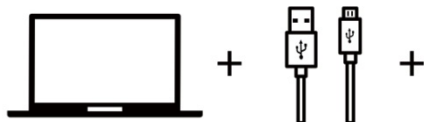

Switch toggle to Cable



Change Light Effect

4 Switch Between Function and Multimedia Keys (F1- F12)

For Windows: Press fn + X + L (for 4 seconds) to switch



fn + X + L



Multimedia keys

F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12

Function keys

EI llllItIRE NEER Lit MEE EI RES illellsERSE16191._1 Lunsiglisigswimusim MEE EMI mis VI* .,_ WW1

..111111 aka milifata til siguig ova SE 11.11ntistillilitrialTS llllLIMIj EI, Ea LIRA, wig GI

For Mac: Go to system settings > Keyboard > and enable the function keys. For F5 & F6 as function keys press fn + K + C (for 4 seconds) and use same shortcut to switch.



Settings



Siri



✓ Press Fn (Function) Space

5 Disable Auto Sleep Mode

The keyboard goes to Auto Sleep Mode in 10 minutes of sitting idle to save battery



Press fn + S + O (for 4 seconds) to disable the Auto Sleep Mode.



fn + S + O

6 Remap keys

We don't have an official software to remap the keys yet. But you can use this two software to get the job done. (Except the light effect key)

For Mac - Karabiner



For Windows - SharpKeys



We have a Linux user group on Facebook. Please search "Keychron Linux Group" on Facebook. So you can better experience with our keyboard.



Turn Off the Backlight

If you are on the Mac, the default is to press F5 key. If you are on Windows, the default is to press fn + F5 key.




Or press the fn + light effect key.



8 Activate Siri / Cortana

For Siri on Mac: Go to System preferences> Siri > select “Press Fn (Function) Space” option. ‘Siri key only works on macOS and does not work on iOS.

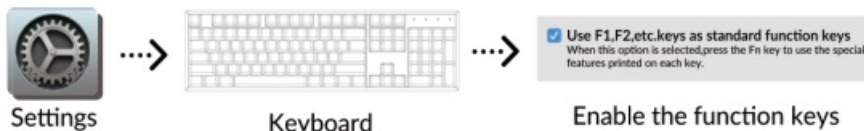

For Cortana on Windows: Select Start > Settings > Cortana and select the shortcut by pressing Windows key + C key. ‘Windows Cortana is only available for Windows 10 and above OS. Cortana is only available in certain countries/regions and might not work everywhere.



K10 BLUETOOTH MECHANICAL KEYBOARD SPECIFICATIONS

A number of keys: 104

Switch type: Mechanical / Optical Switch

Battery: 4000mAh

Working time: Around 70 hours with the backlight on.

Charging time: Around 3 hours

Charging port: USB Type-C


Mode: Bluetooth/Wired Bluetooth operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron K10

Operating Environment: -10 to 50°C

Technical specifications can be subjected to change without notice we apologize for any inconvenience caused

K10 BLUETOOTH MECHANICAL KEYBOARD OVERVIEW

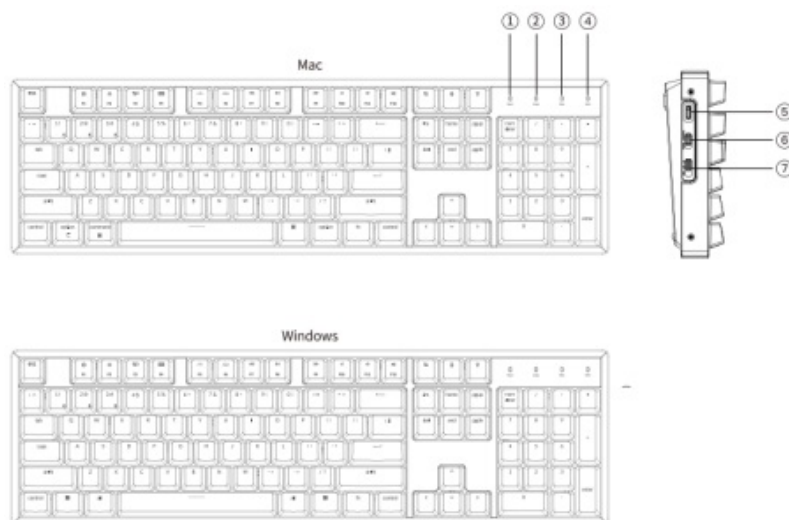

1. Number Lock Indicator
2. Caps Lock Indicator
3. macOS Indicator
4. Windows OS Indicator
5. Charging port
6. Win/Android Mac/iOS (OS Toggle Switch)
7. BT OFF Cable (Mode Toggle Switch)

LED STATUS OVERVIEW

LED Location	Function	Status
Battery indicator	Charging	Low battery – Blinking Red Charging – Static Red Fully charged – Static Green
Bluetooth indicator	Bluetooth	Pairing – Slow Blinking Paired – Light Off Switching – Fast Blinking

FUNCTION DESCRIPTION:

CHARGING

*The Keychron keyboard is compatible with all USB ports. Please use a 5V 2A adapter or USB 3.0 for the best performance. The Keychain K10 can be charged in Bluetooth/on/off mode. Plug the cable into a USB port and plug the other end into the keyboard port. Charging Indicator: When the battery is below 15%, a red battery blinking indicator will be triggered. A red light will stay on while charging; Fully charged in around 3 hours, a green

battery indicator will appear.

** This product supports up to 5V charging voltage and 2A charging current. We are not responsible for any problems caused by improper charging

BLUETOOTH/WIRED MODE (TOGGLE SWITCH)

WIRED MODE

1. Switch the toggle switch to the Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.
3. The Backlit will be turned on. *Under Wired Mode, the keyboard will not enter into Battery Saver Mode.

BLUETOOTH MODE

1. Switch the keyboard to the Bluetooth option.
2. The Backlit will be turned on.
3. Hold the “Fn+1” key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
4. Search for the Bluetooth device “Keychron K10” on your device and connect it (the Bluetooth indicator goes off after successful pairing).

Note: This keyboard supports pairing up to 3 devices simultaneously via combination key „Inn 4_ “111 / lin” + a2n / in,, + „30. *The Bluetooth indicator will continue to flash for 3 minutes. *

*Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.

SWITCH BLUETOOTH DEVICES

Short press combination key “fn” + “1” / “fn” + “2” / “fn” + “3” to switch to other device.

RECONNECT

1. Switch the keyboard to the Bluetooth option to activate the keyboard (the keyboard will connect to the last connected device by default).
2. The Bluetooth indicator flashes for 4 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any button to enter the connection again. * The keyboard must have been paired with the device to perform this function.



TURN OFF THE KEYBOARD

Switch to “Off”

BATTERY SAVER

Under Bluetooth mode, the keyboard backlight turns off when it is inactive for 10 minutes. Tap any button to wake the keyboard. If want to disable this auto battery save mode, press fn+S+O for 4 seconds. Then if want to enter this power save mode again, press fn+S+O for 4 seconds.

BACKLIT SETTING

- Short press  to switch between different types of lighting effects.
- When backlit is on, press the  button to switch among them. Short press fn and “left arrow” or fn and


“right arrow” to adjust light colors. (For RGB version only)

OS SWITCH

1- MAC/iOS Turn the switch to Mac/iOS when you are connected to a Mac or iOS operating system.

2—WINDOWS/ANDROID Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system.



*When using the Windows/Android mode,   keys are used for “Windows” and ‘Alt’ functions.

3—INPUT METHOD SWITCH For iOS: Input method switch: Ctrl + Space Caps Lock: Caps (Enable General>Keyboards>Hardware Keyboard>Caps Lock Language Switch)

For Android:

Input method switch: Shift + Space

NOTE: Functions of the certain multimedia key may be disabled due to compatibility, versions, brands, and drivers of Windows/Android OS. We also recommend not to switch OS frequently as it may impact keyboard operations.

TROUBLESHOOTING

If unable to pair the keyboard to the device, confirm that the device you’re trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer

Allow Bluetooth devices to connect to this computer

Alert me when a Bluetooth device wants to connect

My keyboard isn’t working.

For the keyboard: Turn the keyboard off and back on. Turn Bluetooth off and restart the computer. (Windows) For the device: Go to Bluetooth settings and turn off Bluetooth and “forget” the keyboard. Restart the device and turn on Bluetooth to reconnect.

Bluetooth connection is interrupted even within 10 meters.

Check if the keyboard is resting on a metal surface that can interfere with the Bluetooth signal.

Third-party input tools are not compatible with the keyboard.

Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third-party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

Certain fn keys or multimedia keys does not work under Windows/Android mode.

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS.

Safety Precaution:

Keep the product, accessories and packaging parts out of reach of and choking hazards. Always keep the product dry to avoid corrosion. Do not expose the product to extreme temperatures below -10°C preserve the lifespan of the keyboard and battery.


Keychron, Inc. Dover, DE 19901, United States Find us
at: <https://www.keychron.com>

Support@keychron.com



n@keychron@keychron

Documents / Resources

	Keychron K10 Wireless Mechanical Keyboard [pdf] User Manual K10, Wireless Mechanical Keyboard
---	--