



KLARUS G15 Extreme Output Flashlight User Manual

[Home](#) » [KLARUS](#) » KLARUS G15 Extreme Output Flashlight User Manual 



Extreme Output Flashlight User Manual.
Thank you for choosing Klarus products!
Please read the user manual fully before use.

Contents

- [1 Specifications](#)
- [2 Package](#)
- [3 Operations](#)
- [4 Battery Installation](#)
- [5 Output](#)
- [6 Recharging](#)
- [7 Warranty Procedure](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

Specifications







- Model G15 (V2)
- Dimensions. 120.7mm(4.75)x 27.4mm(1.08) x 26mm(1.02")
- Main LED CREE XHP70.2

- Max Output 4200LM
- Input Voltage- 2.8V-4.2V
- Compatible Batteries. 1 21700(5000mAh)
- Waterproof IPX8
- Weight: 76g(2.68oz) (without battery)







Package

Name	Qty	Name	Qty
Flashlight	1	Clip	1
Battery	1	Lanyard	1
Charging Cable	1	Waterproof O Ring	1
Light Pouch	1	User Manual	1
A-L Adapter	1	A-C Adapter	1
18650Holder	1		

ANSI (21700 3.6V 5000mAh)

Mode Specification		Turbo	High	Medium	Low	Moonlight	Strobe	Beacon	SOS
	ANSI lumens(LM)	4200	2000	500	100	10	4200	500	500
	Runtime(h)	3	3.3	6	28	150			
	Beam intensity(cd)	10000	4230	1060	225	2			
	Beam distance(m)	200	130	65	30	2.5			
	Impact resistance(m)	1							
	Waterproof	IPX8(2 Meters Submersible)							

ANSI (8650 3.7V 2600mAh!

Mode Specification		Turbo	High	Medium	Low	Moonlight	Strobe	Beacon	SOS
	ANSI lumens(LM)	1200	500	200	50	10	1200	200	200
	Runtime(h)	2	4	8	50	120			
	Beam intensity(cd)	3050	1060	420	80	2			
	Beam distance(m)	110	65	41	18	2.5			
	Impact resistance(m)	1							
	Waterproof	IPX8(2 Meters Submersible)							

If the product is not equipped with battery or want a Flashlight to achieve maximum performance, to KLARUS website to buy special battery. www.klaruslight.com
Data are based on Klarus lab tests. Actual results may differ based on usage and conditions

Operations

ON/OFF. Click to turn ON/OFF Light will turn on at the memorized mode
Change Brightness Level: When ON, click and hold switch to cycle through Low

- Medium
- High

One-Touch Low: When Orr click and hold switch for 1 second to turn on Moonlight
Turbo: Double click to enter Turbo. click to turn off
Flash Mode: Triple click to enter Strobe

- triple click to enter Beacon
- triple click to enter SOS
- cycle, click to return to previous status
- During Charging While charging, the light can only be used in Low and Medium, click and hold switch to cycle, click to turn ON/OFF While OFF, click and hold switch to turn on Moonlight

Lockout/Unlock

- Click and hold switch for 5 seconds to Lockout, triple click to Unlock
- Main lamp will flash twice to indicate Locked or Unlocked status
- When Lockout, indicator light will flash 3 times if click switch

Mode Memory

The light will return to the last used constant-on mode during next turn on

Intelligent Thermal Protection System (ITS)

When the flashlight is in Turbo mode, brightness will be automatically adjusted according to the temperature of the flashlight body to protect the LED and internal components and ensure safety and stability.


Battery Capacity Indicator

- After power-on the indicator will flash for 5 seconds
- Green. 70%-100% capacity remaining
- Orange, 30%.70% capacity remaining
- Red less than 30% capacity remaining
- Red flashing, less than 10% capacity remaining


Battery Installation



Twist off the tailcap




Insert battery with positive terminal towards lamp




Screw the tailcap tightly

Note: Please remove the battery and store separately if the light will not be used for an extended period of time. Please charge the battery every 3 months.

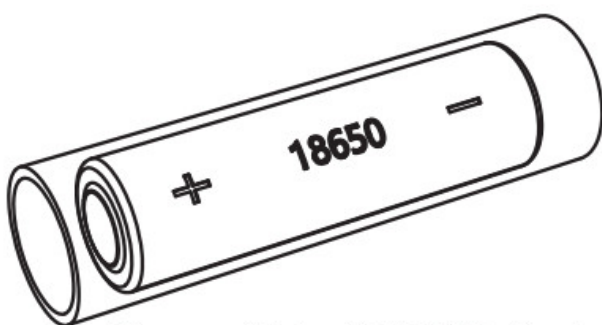

Compatible 18650 Batteries

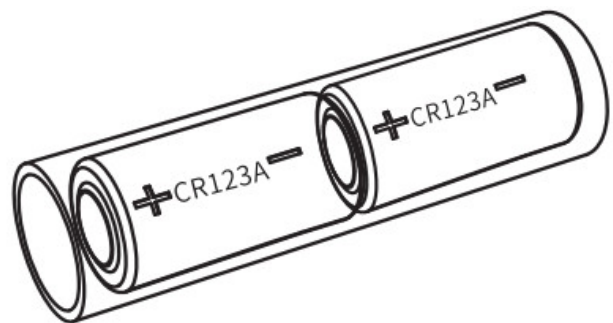

Compatible 2*CR123A Batteries

Output

USB C Maximum discharge current 5V/ 1.5A (only for mobile phone charging, charging current varies according to different mobile phone brands)

Recharging

G15 uses USB-C charging, and is compatible with any USB-C cable wall charger or car charger.

Charging Indicator

Red: Charging in progress

Green: Charging complete

Yellow Flashing Battery problem (battery inserted not 18650 battery or battery orientation reversed or battery destroyed)

Note: please charge the battery when its capacity is low otherwise the flashlight is not able to change brightness level or brightness will become dark.

Warranty Procedure

- If this flashlight does not perform as specified, the product will be repaired or replaced as described above. Please contact your original KLARUS dealer for replacement and repairs.
- If the warranty issue cannot be resolved by the dealer please contact KLARUS at service@klaruslight.com for assistance. Please provide the following information to expedite the process.
 - 1) List the serial number on the light
 - 2) Include a detailed description identifying the issue, accompanied by pictures or a short video demonstration if necessary.
 - 3) Provide the name and store of the dealer you made the purchase from and a copy of the proof of purchase

Note

- Product specifications of this printing is accurate, any updates will be reflected in the physical product. There may be slight difference between photographic and actual product
- KLARUS reserve the right to make the final determination of terms and conditions in this manual
- Scan the QR code and receive the latest update from KLARUS media account or KLARUS official website



Website



Facebook

<http://www.klaruslight.com/>

KLARUS LIGHTING TECHNOLOGY CO., LIMITED

Address: 8/F, E Building, Longjing Industrial Park, Bantian Subdistrict, Longgang District, Shenzhen City, 518000, China. Phone: +86-755-27700110


Customer Service: service@klaruslight.com

Website: www.klaruslight.com



Made in China

Documents / Resources



[KLARUS G15 Extreme Output Flashlight](#) [pdf] User Manual

G15 Extreme Output Flashlight, G15, G15 Flashlight, Extreme Output Flashlight, Output Flashlight, Extreme Flashlight, Flashlight

