



KLARUS G15 V2 Extreme Output Flashlight User Manual

[Home](#) » [KLARUS](#) » KLARUS G15 V2 Extreme Output Flashlight User Manual 

Contents

- [1 KLARUS G15 V2 Extreme Output Flashlight](#)
- [2 Specifications](#)
- [3 Package](#)
- [4 Operations](#)
- [5 Battery Capacity Indicator](#)
- [6 Battery Installation](#)
- [7 Output](#)
- [8 Recharging](#)
- [9 Usage and Maintenance](#)
- [10 Warranty](#)
 - [10.1 Warranty Procedure](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)



KLARUS G15 V2 Extreme Output Flashlight



Thank you for choosing Klarus products!
Please read the user manual fully before use.







Specifications

- **Model:** G15 V2
- **Dimensions:** 120.7mm(4.75") x 27.4mm(1.08") x 26mm(1.02")
- **Main LED:** CREE XHP70.2
- **Max Output:** 4200LM
- **Input Voltage:** 2.8V-4.2V
- **Compatible Batteries:** 1 x 21700(5000mAh)
- **Waterproof:** IPX8
- **Weight:** 76g(2.68oz) (without battery)







Package

NAME	Qty	NAME	Qty
Flashlight	1	Clip	1
Battery	1	Lanyard	1
Charging Cable	1	Waterproof O Ring	1
Light Pouch	1	User Manual	1
A-LAdapter	1	A-CAdapter	1
18650Holder	1		

ANSI (21700 3.6V 5000mAh)

Mode Specification		Turbo	High	Medium	Low	Moonlight	Strobe	Beacon	SOS
	ANSI lumens(LM)	4200	2000	500	100	10	4200	500	500
	Runtime(h)	3	3.3	6	28	150			
	Beam intensity(cd)	10000	4230	1060	225	2			
	Beam distance(m)	200	130	65	30	2.5			
	Impact resistance(m)	1							
	Waterproof	IPX8(2 Meters Submersible)							

ANSI (186503.7V 2600mAh)

Mode Specification		Turbo	High	Medium	Low	Moonlight	Strobe	Beacon	SOS
	ANSI lumens(LM)	1200	500	200	50	10	1200	200	200
	Runtime(h)	2	4	8	50	120			
	Beam intensity(cd)	3050	1060	420	80	2			
	Beam distance(m)	110	65	41	18	2.5			
	Impact resistance(m)	1							
	Waterproof	IPX8(2 Meters Submersible)							

If the product is not equipped with a battery or if want a Flashlight to achieve maximum performance, to the KLARUS website to buy a special battery: www.klaruslight.com.

Data are based on Klarus lab tests. Actual results may differ based on usage and conditions.

Operations

- **ON/OFF:** Click to turn ON/OFF. Light will turn on in the memorized mode.
- **Change Brightness Level:** When ON, click and hold the switch to cycle through Low→+ Medium→+ High.
- **One-Touch Low:** When OFF, click and hold the switch for 1 second to turn on Moonlight.
- **Turbo:** Double-click to enter Turbo, and click to turn off.
- **Flash Mode:** Triple-click to enter Strobe triple click to enter Beacon triple-click to enter SOS cycle, and click to return to the previous status.

During Charging:

While charging, the light can only be used in Low and Medium, click and hold the switch to cycle, and click to turn ON/OFF. While OFF, click and hold the switch to turn on Moonlight.

Lockout/Unlock

- Click and hold the switch for 5 seconds to Lockout, and triple click to Unlock.
- The main lamp will flash twice to indicate Locked or Unlocked status.
- When Lockout, the indicator light will flash 3 times if click the switch.

Mode Memory

The light will return to the last used constant-on mode during the next turn.

Intelligent Thermal Protection System (ITS)

When the flashlight is in Turbo mode, brightness will be automatically adjusted according to the temperature of the flashlight body to protect the LED and internal components and ensure safety and stability.


Battery Capacity Indicator

- After power-on, the indicator will flash for 5 seconds.
- Green, 70%-100% capacity remaining.
- Orange, 30%-70% capacity remaining.
- Red, less than 30% capacity remaining.
- Red flashing, less than 10% capacity remaining


Battery Installation



Twist off the tailcap




Insert battery with positive terminal towards lamp




Screw the tailcap tightly

Note:

Please remove the battery and store it separately if the light will not be used for an extended period of time. Please charge the battery every 3 months.

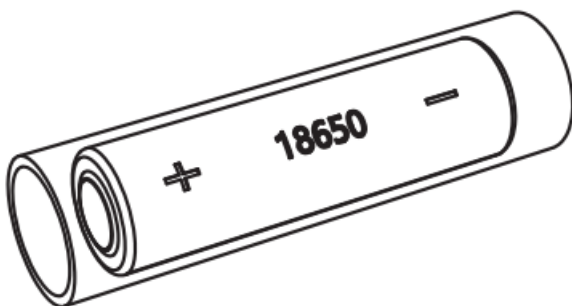

Compatible 18650 Batteries

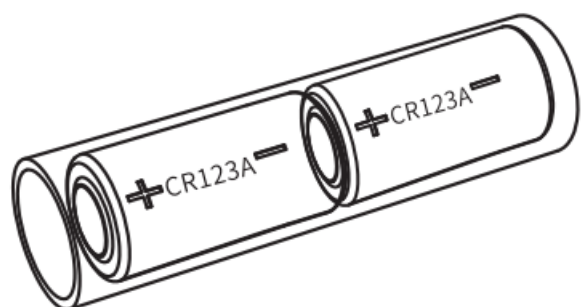

Compatible 2*CR123A Batteries

Output

USB C:

Maximum discharge current 5V / 1.5A (only for mobile phone charging).

Recharging

G15 V2 uses USB-C charging and is compatible with any USB-C cable, wall charger or car charger.

- Charging Indicator:
- Red: Charging in progress
- Green: Charging complete
- Yellow Flashing: Battery problem (battery inserted not 18650 battery or battery orientation reversed or battery destroyed)

Note:

Please charge the battery when its capacity is low otherwise the flashlight is not able to change its brightness level or the brightness will become dark. charging current varies according to different mobile phone brands).

Usage and Maintenance

- During use, the product's surface temperature will increase, especially when higher lumen output. The maximum safe operating surface temperature of the flashlight is 50°(/ 122°F.
- The included battery is charged to approximately 50% by default and will not support maximum output and maximum runtime. Please charge the battery fully before first use.
- To maintain a waterproof rating, please lubricate the O-ring with silicone-safe lubricant and replace worn O-rings as needed.
- Do not make eye contact directly with light to avoid injury.
- Do not disassemble or modify this product which can cause damage and will void the warranty.

Warranty

- KLARUS guarantees the flashlight against defects in material and workmanship. Flashlight products that are found to be defective under normal use within 5 years of the purchase date will be repaired or replaced without charge.
- Klarus offers a 1-year warranty for all rechargeable batteries.

Limited Lifetime Warranty

If problems develop after 5 years from the date of purchase, KLARUS will charge for parts and repairs. The total repair fee will be assessed according to the cost of the replacement materials. If damage to the light is substantial, KLARUS will contact the customer via the dealer with a quote.

Warranty Procedure

- If this flashlight does not perform as specified, the product will be repaired or replaced as described above.
- Please contact your original KLARUS dealer for replacement and repairs.
- If the warranty issue cannot be resolved by the dealer, please contact KLARUS at service@klaruslight.com for assistance.

Please provide the following information to expedite the process:

- List the serial number on the light.
- Include a detailed description identifying the issue, accompanied by pictures or a short video demonstration if necessary.
- Provide the name and store of the dealer you made the purchase from; and a copy of the proof of purchase.

Note:

- Product specifications of this printing is accurate, any updates will be reflected in the physical product. There may be a slight difference between photographic and actual products.
- KLARUS reserve the right to make the final determination of terms and conditions in this manual.
- Scan the QR code and receive the latest update from the KLARUS media account or KLARUS official website.



Website



Facebook


KLARUS LIGHTING TECHNOLOGY CO., LIMITED

- **Address:** 8/F, E Building, Longjing Industrial Park, Bantian Subdistrict, Longgang District, Shenzhen City, 518000, China.
- **Phone:** +86-755-27700110
- **Customer Service:** service@klaruslight.com.
- **Website:** www.klaruslight.com.



Made In China.

Documents / Resources

	<p>KLARUS G15 V2 Extreme Output Flashlight [pdf] User Manual G15 V2 Extreme Output Flashlight, G15 V2, Extreme Output Flashlight, Output Flashlight, Flashlight</p>
---	---