




## Kobalt 3DPCWB2013 3-Drawer Work Bench User Guide

[Home](#) » [Kobalt](#) » Kobalt 3DPCWB2013 3-Drawer Work Bench User Guide 

### Contents


- [1 Kobalt 3DPCWB2013 3-Drawer Work Bench](#)
- [2 PACKAGE CONTENTS](#)
- [3 HARDWARE CONTENTS](#)
- [4 SAFETY INFORMATION](#)
- [5 ASSEMBLY INSTRUCTIONS](#)
- [6 DRAWER REMOVAL](#)
- [7 CARE AND MAINTENANCE](#)
- [8 TROUBLESHOOTING](#)
- [9 3-YEAR LIMITED WARRANTY](#)
- [10 REPLACEMENT PARTS LIST](#)
- [11 Related Posts](#)



**Kobalt 3DPCWB2013 3-Drawer Work Bench**



## PACKAGE CONTENTS

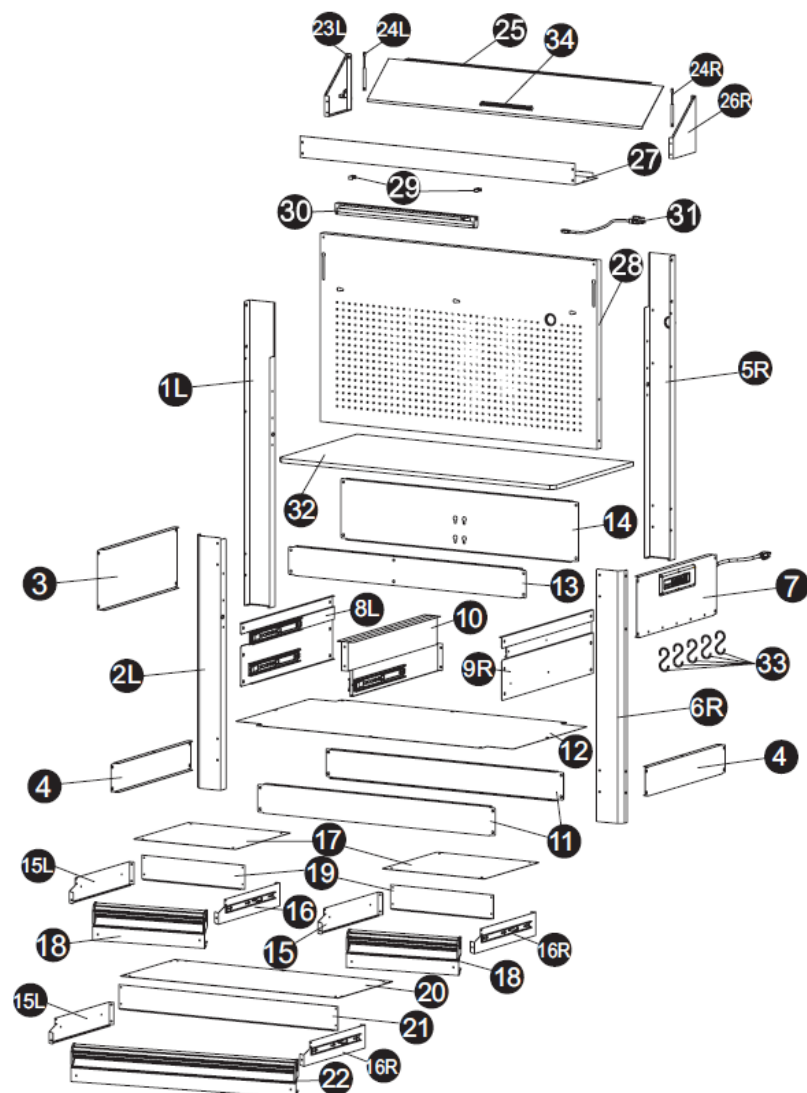


PART      DESCRIPTION		QUANTITY
1L	Rear leg (left)	1
2L	Front leg (left)	1
3	Side panel (left)	1
4	Side frames (left & right)	2
5R	Rear leg (right)	1
6R	Front leg (right)	1
7	Side panel (right)	1
8L	Drawer slide panel (left)	1
9R	Drawer slide panel (right)	1
10	Slide support (intermediate)	1
11	Bottom frame (front & rear)	2
12	Base panel	1
13	Upper panel	1
14	Back panel	1
15L	Drawer side panel (left)	3
16R	Drawer side panel (right)	3
17	Drawer bottom panel (small)	2

18	Drawer front (small)	2
----	----------------------	---

19	Drawer back (small)	2
20	Drawer bottom panel (large)	1
21	Drawer back (large)	1
22	Drawer front (large)	1
23L	Storage cage side panel (left)	1
24L	Hinge (left)	1
24R	Hinge (right)	1
25	Storage cage lid	1
26R	Storage cage side panel (right)	1
27	Storage cage bottom panel	1
28	Pegboard	1
29	Light support bracket	2
30	Light	1

31	Light power cord	1
32	Wooden table top	1
33	Hanging hook	5
34	Storage cage lid drawer puller	1

## HARDWARE CONTENTS

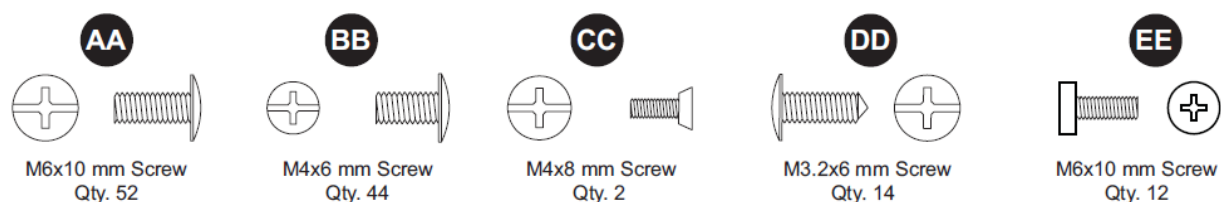

## SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

**DANGER:** ELECTRICAL SHOCK HAZARD. Do not plug the cord into an outlet with wet hands. Do not use this tool chest near a bathtub, shower or swimming pool. Follow this manual for recommended usage.

**WARNING:** Read all safety warnings and all instructions. Failure to follow all warnings and instructions may result in electric shock, fire and/or serious injury. Save all warnings and instructions for future use.

- KEEP CHILDREN AWAY from item at all times.
- DO NOT stand on this product. You may fall which could cause personal injury and product damage.
- BE CAREFUL when opening more than one drawer. The item may become unstable and tip over causing personal injury and/or product damage.
- DO NOT step in the drawers. You may fall which may cause personal injury or product damage.

**CAUTION:** DO NOT open more than one drawer at a time.

- DO NOT mount this product on a truck bed or any other moving object.
- DO NOT alter this product in any manner. For example, do not weld external lock bars or attach electrical equipment.
- The maximum weight for each drawer should NOT exceed 100 lbs.

## PREPARATION

Before you begin the assembly of this product, ensure that all parts are present. Compare all parts with the package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Time: 120 minutes

Tools Required for Assembly (not included): Phillips Screwdriver

## ASSEMBLY INSTRUCTIONS





**Important:** Do not over-tighten the screws as this may result in stripping them. After the workbench is completely assembled, fully tighten each screw.

1. Attach the left rear leg (1L) and the left front leg (2L) to the side frame (4) using screws (AA). On the side frame (4), ensure the edge with the hole is facing up.

### Hardware Used

AA

M6x10 mm  
Screw

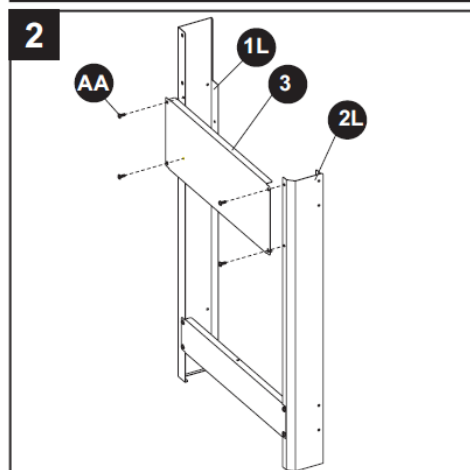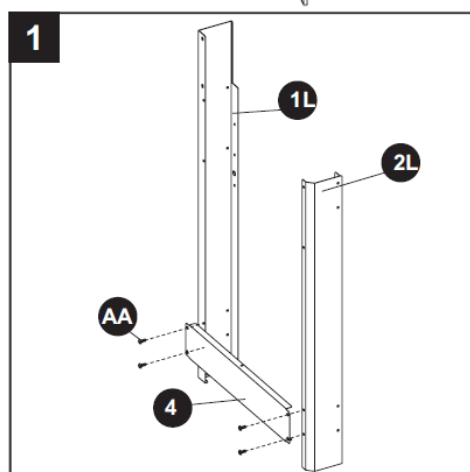



2. Attach the left side panel (3) using screws (AA).

### Hardware Used

AA

M6x10 mm  
Screw




3. Align the left drawer slide panel (8L) with the predrilled holes, ensuring the slides are toward the front of the unit. Attach using screws (EE).

### Hardware Used


EE

M6x10 mm  
Screw




x 6

Repeat steps 1 through 3 for the right legs (5R and 6R), right side panel (7) and drawer slide panel right (9R).

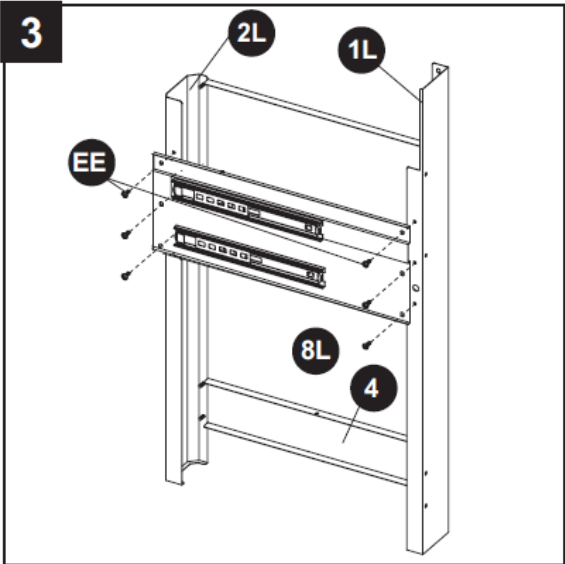


4. Feed the power cord from the power strip portion of the right side panel (7) through the grommet in the right rear leg (5R).

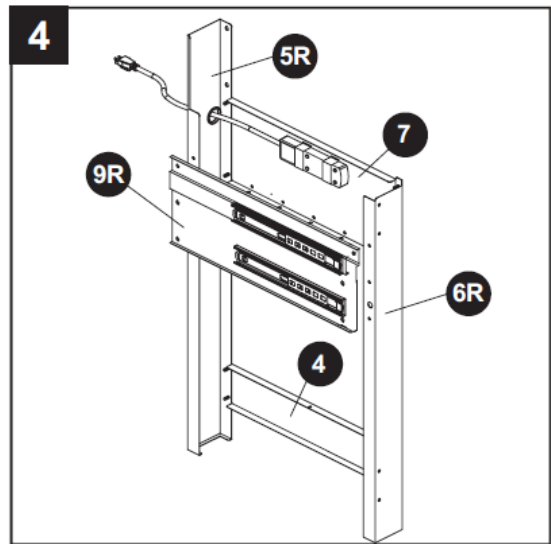

5. Attach a bottom frame (11) to the front of the left and right front legs (2L and 6R) using screws (AA). Ensure the holes on the bottom frame (11) are facing up.

**Hardware Used**



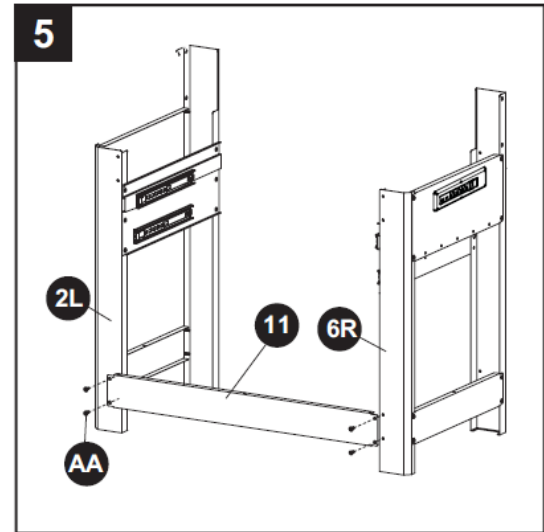


6. Attach a bottom frame (11) to the front of the left and right rear legs (1L and 5R) using screws (AA). Ensure the holes on the bottom frame (11) are facing up.

#### Hardware Used

AA

M6x10 mm  
Screw

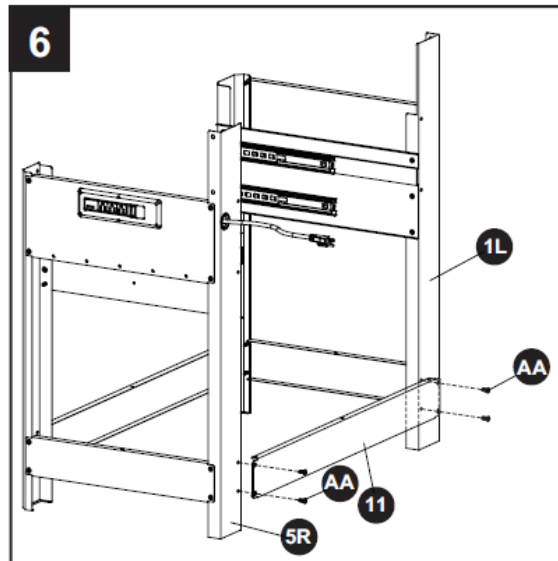




7. Attach the base panel (12) to the bottom frames (11) and side frames (4) using screws (AA).

#### Hardware Used

AA

M6x10 mm  
Screw

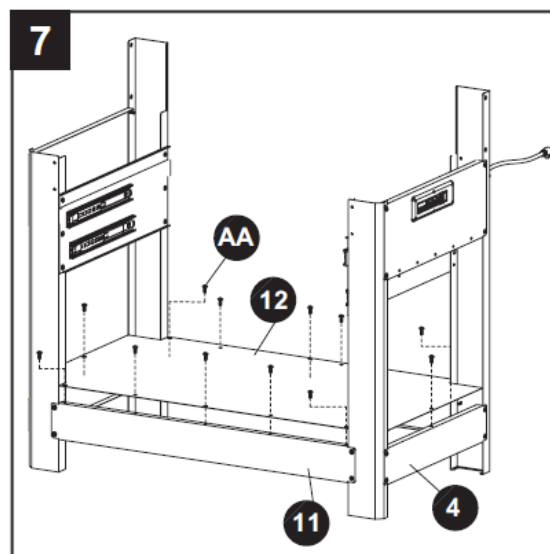


8. Attach the back panel (14) to the left rear leg (1L) and right rear leg (5R) using screws (AA).


#### Hardware Used

AA

M6x10 mm  
Screw







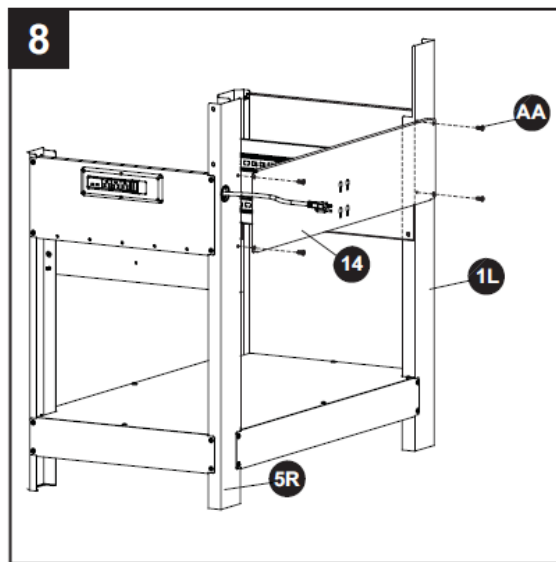


9. Loosely attach screws (AA) to the end of the intermediate slide support (10). Align the screws (AA) with the holes in the back panel (14), insert the screws (AA) into the holes and lower the intermediate slide support (10). Tighten the screws (AA).

#### Hardware Used

**AA**

M6x10 mm  
Screw

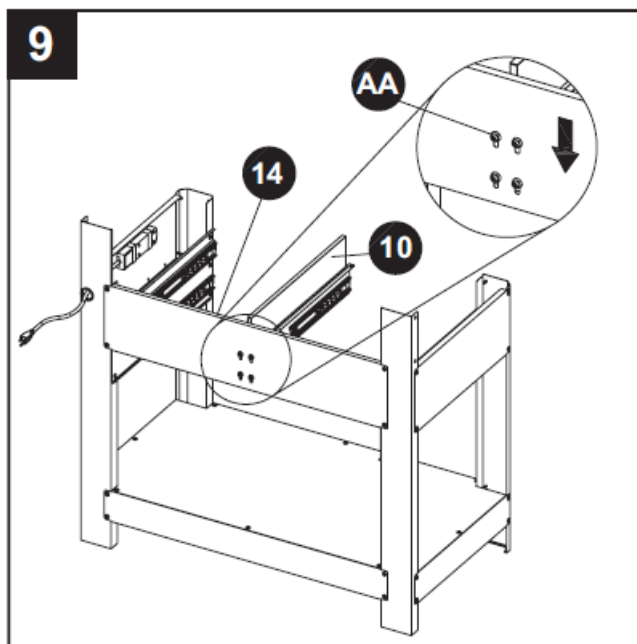



10. Attach the upper panel (13) to the left front leg (2L) and right front leg (6R) using screws (AA).

#### Hardware Used

**AA**


M6x10 mm  
Screw



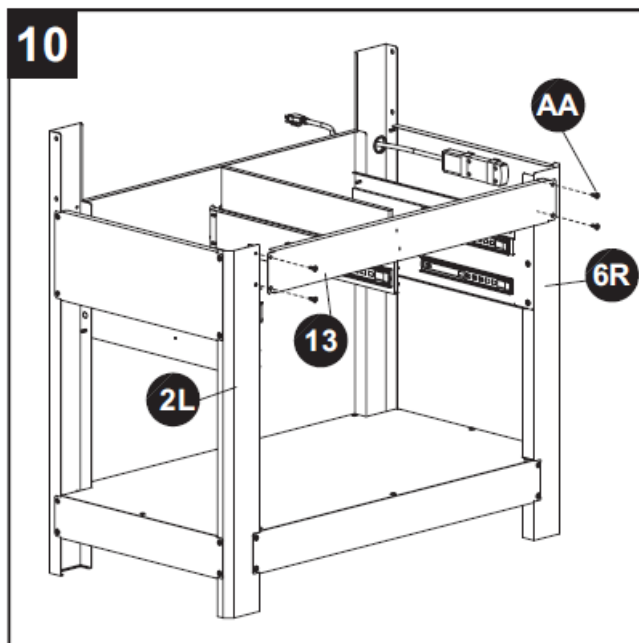

11. Secure the intermediate slide support (10) to the upper panel (13) by inserting screws (AA) through the slide support (10) and into the upper panel (13).

#### Hardware Used

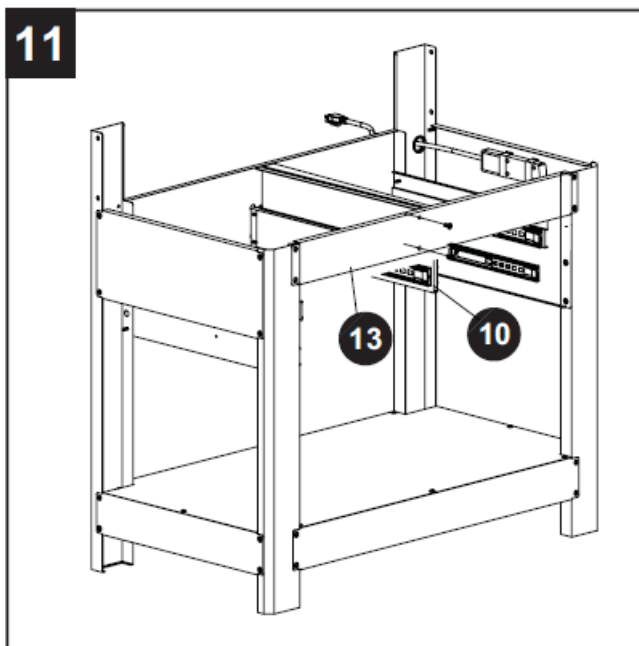


12. Attach the small drawer front (18) to the left drawer side panel (15L) and right drawer side panel (16R) by inserting screws (BB) through the small drawer front (18) and into the side panels (15L and 16R). Insert (DD) screws through parts (15L and 16R) and into sides of drawer front (18).

Attach the small drawer back (19) to the left and right drawer side panels (15L and 16R) by inserting screws (BB) through the side drawer panels (15L and 16R) and into the large drawer back (21).

#### Hardware Used



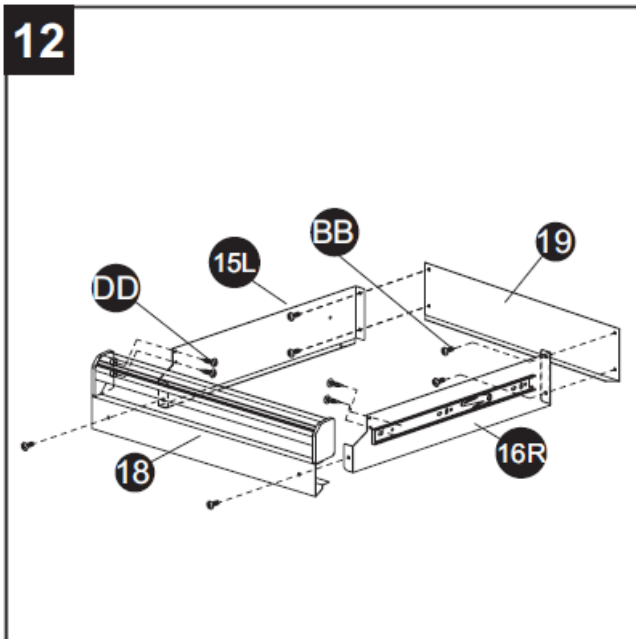


13. Insert the small drawer bottom panel (17) into the drawer assembly and attach with the screws (BB).

**Note:** The additional holes in the drawer bottom are there for drainage in the event of a spill.

#### Hardware Used




M4x6 mm  
Screw



x 4

Repeat steps 12 and 13 to assemble the second small drawer. Set the drawers aside. They will be installed later in the procedure.

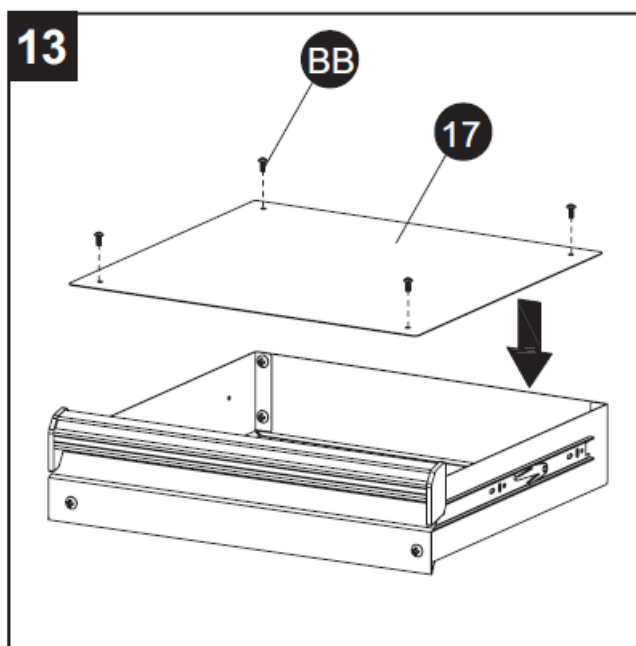


14. Attach the large drawer front (22) to the left drawer side panel (15L) and right drawer side panel (16R) by inserting screws (BB) through the large drawer front (22) and into the side panels (15L and 16R). Insert (DD) screws through parts (15L and 16R) and into sides of drawer front (22).


Attach the large drawer back (21) to the left and right drawer side panels (15L and 16R) by inserting screws (BB) through the side drawer panels (15L and 16R) and into the large drawer back (21).

## Hardware Used

<b>BB</b>	M4x6 mm Screw			x 13
<b>DD</b>	M3.2x6 mm Screw			x 4

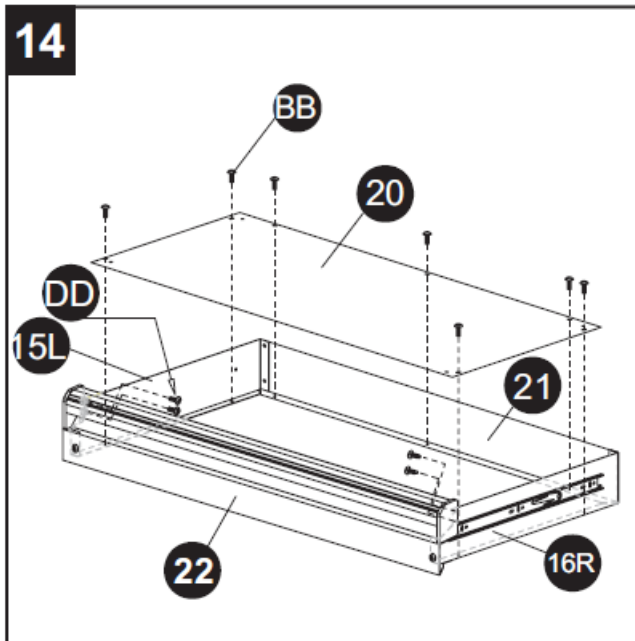


15. Extend the slides located on the drawer slide panels (8L and 9R) to their full extension over the drawer rails. Align the drawer with the extended slides. Insert the extended slides into the slide supports on both sides of the drawer. Without exerting undue pressure on the drawer, slowly and evenly push the drawer into the workbench. Once inserted, completely close the drawer to set the slides in their regular operating position.

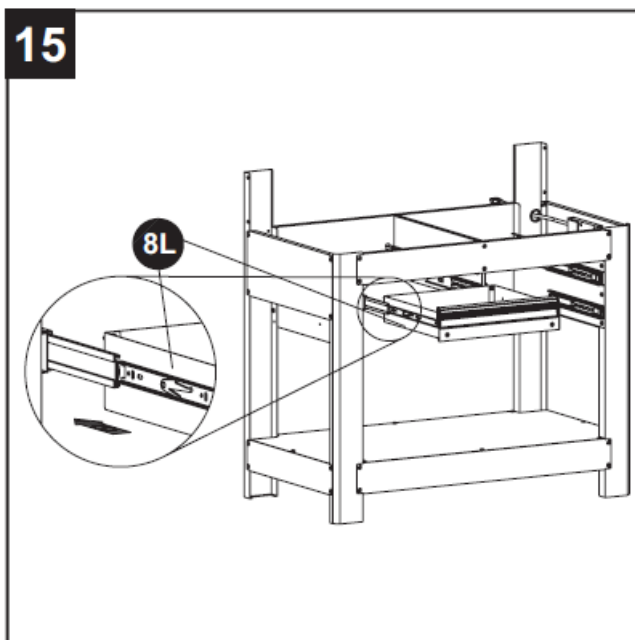


**Note:** The drawer will stop initially at the detent on the drawer slide. Apply even pressure against the front of the drawer to engage the detent. Do not slam the drawer shut.

Repeat this procedure to install the other two drawers.

16. Insert the storage cage bottom panel (27) into the three keyhole slots on the front of the pegboard (28). Slide the storage cage bottom panel (27) to the right to lock in place.

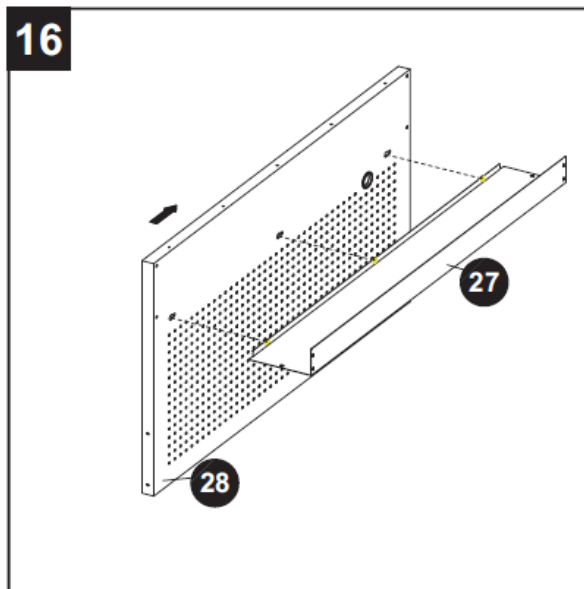


17. Insert the left storage cage side panel (23L) into the keyhole slot on the left side of the pegboard (28). Slide the left storage cage side panel (23L) down until it meets the storage cage bottom panel (27). Repeat this step for the right storage cage side panel (26R).

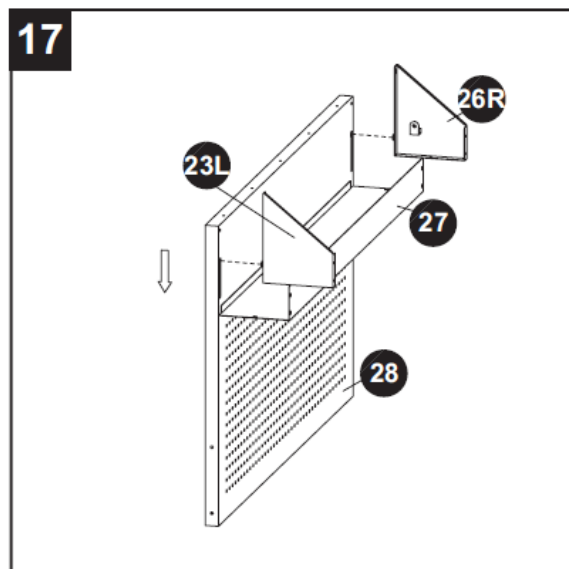

18. Secure the left and right storage cage side panels (23L and 26R) with screws (AA and BB).

#### Hardware Used

<b>AA</b>	M6x10 mm Screw		x 2
<b>BB</b>	M4x6 mm Screw		x 6


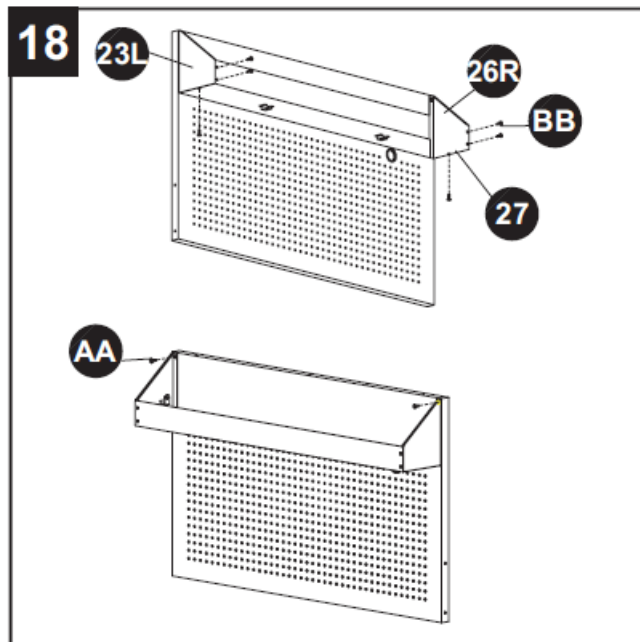


19. Align the storage cage lid (25) with the storage cage lid drawer pull (34). Secure using the screws (DD).

#### Hardware Used

DD

M3.2x6 mm  
Screw

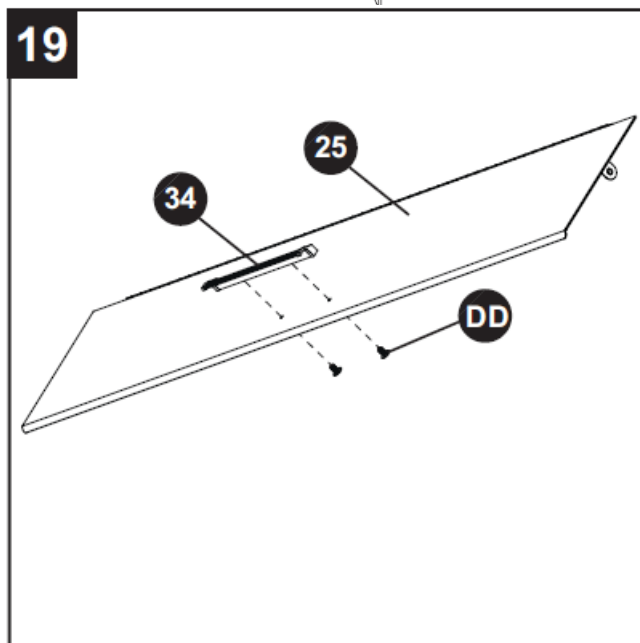

20. Align the hinged edge of the storage cage lid (25) with the top of the pegboard (28). Secure using screws (BB). Remove the screws from inside the storage cage installed on the left storage cage side panel (23L), the storage cage lid (25) and the right storage cage side panel (26R). Install the left hinge (24L) and the right hinge (24R) using the removed screws.


**Note:** Attach the short leg of the hinge to the sides of the cage and fold the hinge forward.

#### Hardware Used

BB


M4x6 mm  
Screw



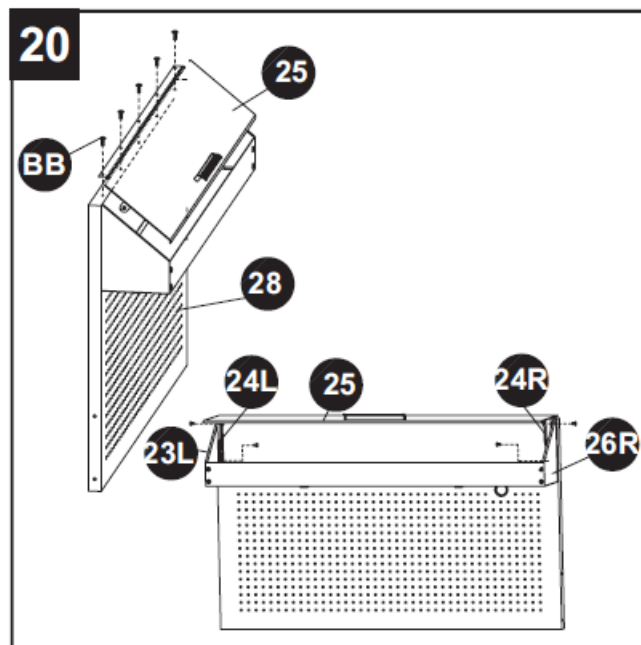

21. Attach the pegboard (28) to the left rear leg (1L) and the right rear leg (5R) using screws (AA).


#### Hardware Used

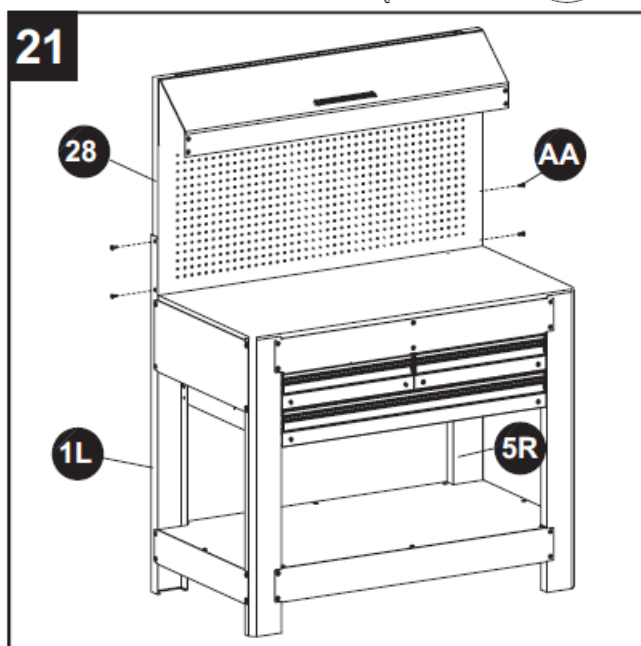


22. Attach the light support brackets (29) to the underside of the storage cage bottom panel (27) using screws (CC) packaged with the light support bracket (29). The light support bracket (29) is packed in the box with the light (30).

#### Hardware Used




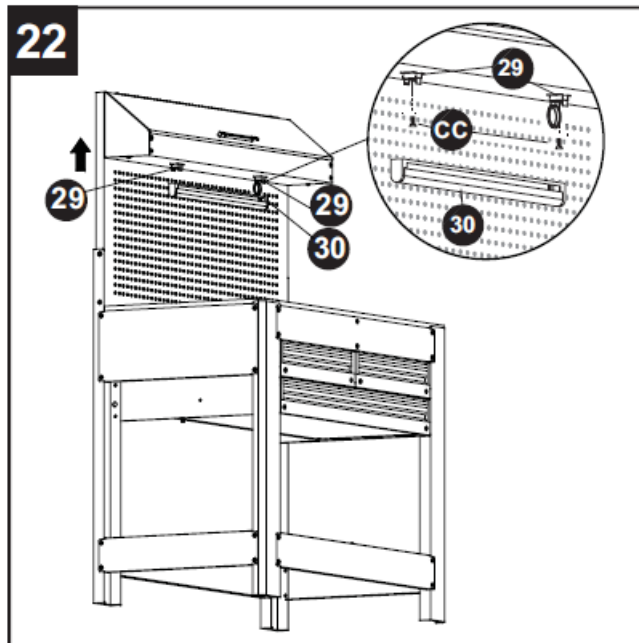

23. Install the light (30) into the light support brackets (29). Feed the light power cord (31) through the grommet in the pegboard (28). Plug the light power cord (31) into the light (30).

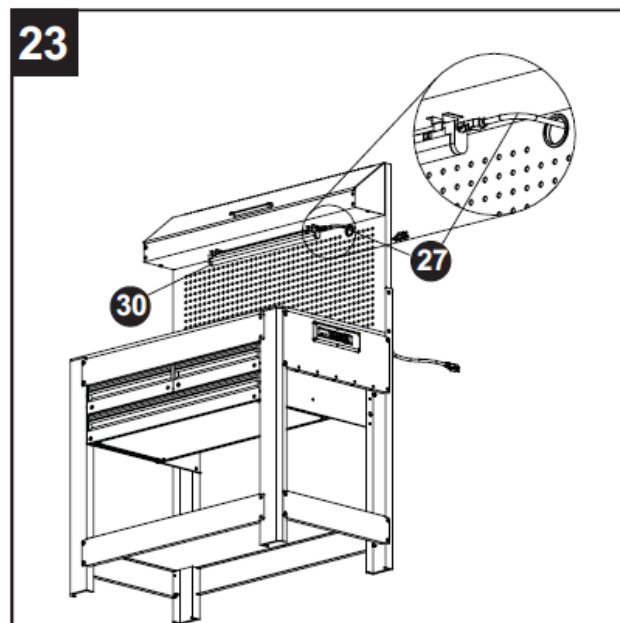


24. Place the wooden table top (32) onto the workbench above the drawers.

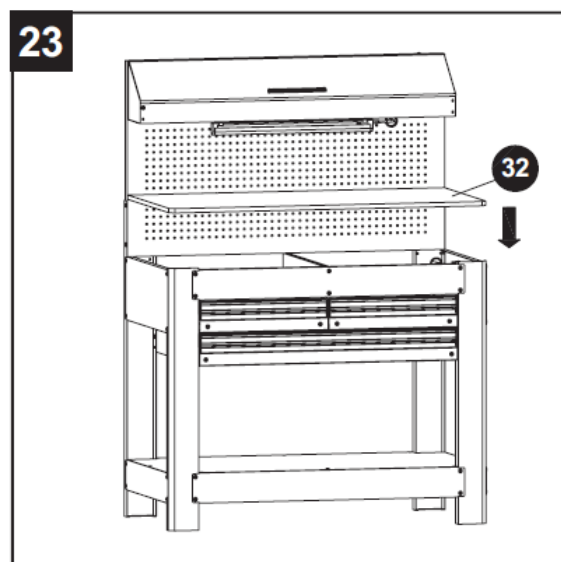



25. Insert the hanging hooks (33) into the holes on the right side of the workbench.



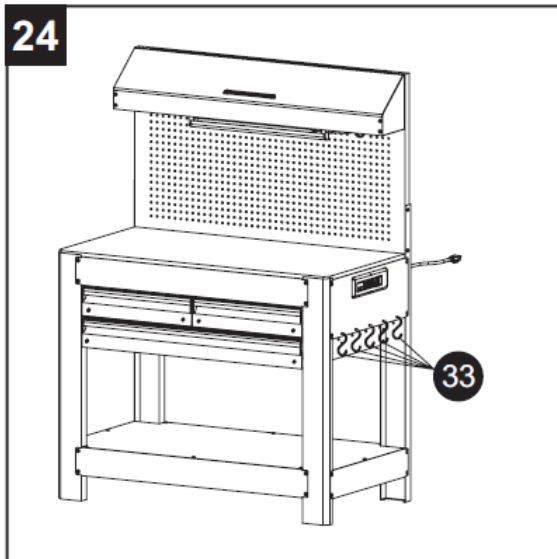

## DRAWER REMOVAL

1. Pull the drawer out of the workbench until the slides are fully extended. Push the release lever down on the right side of the drawer.

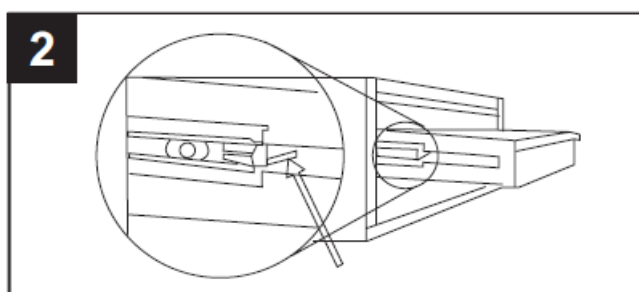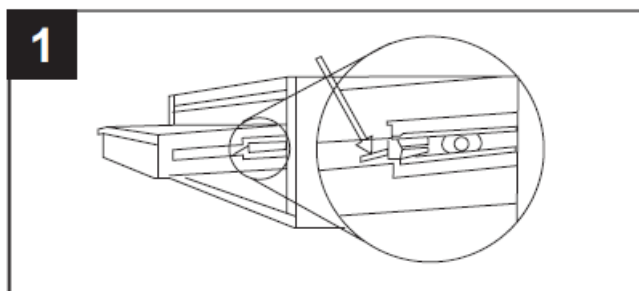

2. Pull the release lever up on the left side of the drawer. Holding both levers, pull the drawer out until the drawer releases from the drawer slides.

## CARE AND MAINTENANCE

### Cleaning

1. Clean using a mild liquid soap, rinse with clean water and dry thoroughly. Do not clean with abrasive detergents.
2. Clean off water or other liquids spilled or splashed on the workbench immediately and dry the unit thoroughly.
3. Keep your workbench covered to protect it from dust and moisture that could potentially damage the unit.

## TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTIVE ACTION
The tools plugged into the power strip do not work.	The power cord plugs are loose.	Ensure the power cord plugs are plugged in properly.
	The lamp tube is old.	Replace the lamp tube.
The light does not work.	1. The lamp plug is loose. 2. The lamp tube is old.	1. Ensure the power cord plug is plugged in properly. 2. Replace the lamp tube.

### 3-YEAR LIMITED WARRANTY

This item carries a 3-year warranty from the date of purchase against defective parts and workmanship. Warranty does not cover damage due to mishandling or abuse. This warranty gives you specific legal rights, and you may have other rights that vary from state to state.

### REPLACEMENT PARTS LIST

PART      DESCRIPTION		PART ID
1L	Rear leg (left)	HSWKB-1
2L	Front leg (left)	
3	Side panel (left)	HSWKB-3
4	Side frames (left & right)	HSWKB-4
5R	Rear leg (right)	HSWKB-5
6R	Front leg (right)	HSWKB-6
7	Side panel (right)	HSWKB-7
8L	Drawer slide panel (left)	HSWKB-8
9R	Drawer slide panel (right)	HSWKB-9
10	Slide support (intermediate)	HSWKB-10
11	Bottom frame (front & rear)	HSWKB-11
12	Base panel	HSWKB-12
13	Upper panel	HSWKB-13
14	Back panel	HSWKB-14
15L	Drawer side panel (left)	HSWKB-15
16R	Drawer side panel (right)	HSWKB-16
17	Drawer bottom panel (small)	HSWKB-17
18	Drawer front (small)	HSWKB-18
19	Drawer back (small)	HSWKB-19
20	Drawer bottom panel (large)	HSWKB-20

21	Drawer back (large) HSWKB-21	
22	Drawer front (large)	HSWKB-22
23L	Storage cage side panel (left)	HSWKB-23
24L	Hinge (left)	HSWKB-24
24R	Hinge (right)	HSWKB-25
25	Storage cage lid	HSWKB-26
26R	Storage cage side panel (right)	HSWKB-27
27	Storage cage bottom panel	HSWKB-28
28	Pegboard	HSWKB-29
29	Light support bracket	HSWKB-30
30	Light	HSWKB-31
31	Light power cord	HSWKB-32
32	Wooden table top	HSWKB-33
33	Hanging hook	HSWKB-34
34	Storage cage lid drawer puller	HSWKB-35
AA	M6x10 mm Screw	HSWKB-36
BB	M4x6 mm Screw	HSWKB-37
CC	M4x8 mm Screw	HSWKB-38
DD	M3.2x6 mm Screw	HSWKB-39
EE	M6x10 mm Screw	HSWKB-40

For replacement parts, call our customer service department at 1-888-3KOBALT (1-888-356-2258), 8 a.m. – 8 p.m., EST, Monday – Friday.

KOBALT® and the K Design® are registered trademarks of LF, LLC. All Rights Reserved.

#### **ATTACH YOUR RECEIPT HERE**

Serial Number

Purchase Date

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-888-3KOBALT (1-888-356-2258), 8 a.m. – 8 p.m., EST, Monday – Friday

**Download PDF:** [Kobalt 3DPCWB2013 3-Drawer Work Bench User Guide](#)