



KÖNNER SOHNEN KS Series Running Generator On LPG Instructions

[Home](#) » [KÖNNER SOHNEN](#) » KÖNNER SOHNEN KS Series Running Generator On LPG Instructions 

KÖNNER SOHNEN KS Series Running Generator On LPG




Contents


- [1 COMMISSIONING OF A INVERTER GENERATORS](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)
- [3 Related Posts](#)

COMMISSIONING OF A INVERTER GENERATORS

1. Please read the operating manual carefully before getting started.
2. Connect the terminals to the battery: “+” to “+” (red), “-” to “-” (black) (For model KS 5500iEG S).
3. Fill the engine with motor oil for engines SAE 10W-30 or SAE 10W-40.
4. Check oil level.
5. For model KS 5500iEG S – set the fuel switch FUEL CHOICE to LPG. The inverter generators KS 2100iG S, KS 3100iG S use smart fuel switching system. In order to use LPG as fuel you need to connect a hose to the corresponding connector on the generator panel and open the valve on the gas cylinder. The solenoid valve will automatically shut off the gasoline supply from the gasoline tank.
6. Connect the LPG hose to the LPG input on the generator control panel (connect end A of a hose to the LPG input on the generator control panel, as shown in Fig. 1.).
7. Connect the hose end with the reducer to the gas cylinder (connect end B of hose to the gas cylinder, as shown in Fig. 1).
8. Open the gas valve on the cylinder, making sure that no gas is leaking.
9. Press the pressure relief valve on the reducer 2-3 times (see Fig. 1).

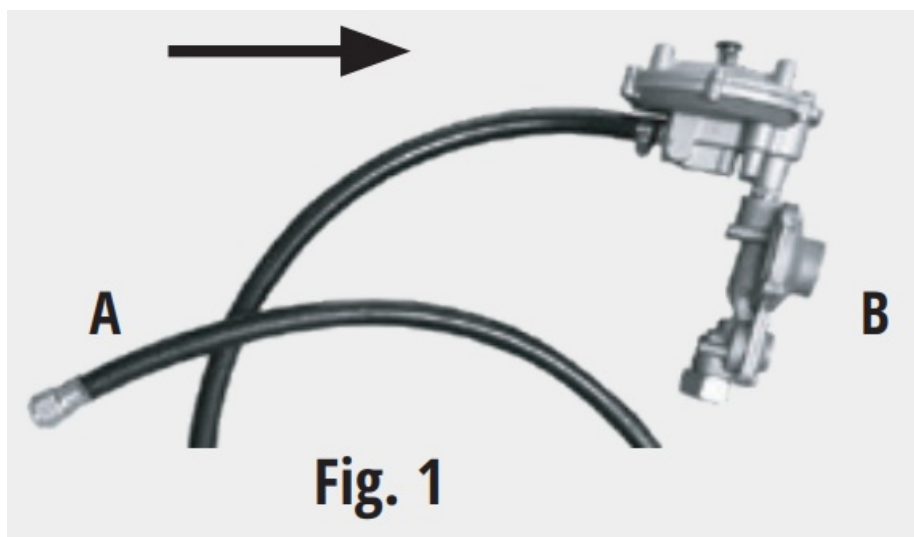

10. When using for the first time, fill the gas line with gas by turning the key (pressing start button) to the “OFF” position and slowly pull the starter handle to the full cord length 2 to 3 times.
11. For manual start KS 5500iE G model, press MAIN POWER button to “ON” position, pull the manual starter until a slight resistance is felt, then pull it toward you relatively sharply. Slowly return the manual starter by hand, do not release it abruptly. For electric start – press MAIN POWER button to “ON” position, then press the ELECTRIC START button. If the engine does not start on the first try, press the ELECTRIC START button again in 3-5 seconds.
12. To start KS 2100iG S, KS 3100iG S models, turn the Multifunctional engine switch to the “START” position (fig. 2). Pull the handle of manual starter until a slight resistance is felt, then pull it relatively sharply. Slowly return the handle manual starter by hand, do not release it abruptly. Turn the Multifunctional engine switch to the “RUN” position (fig. 2).

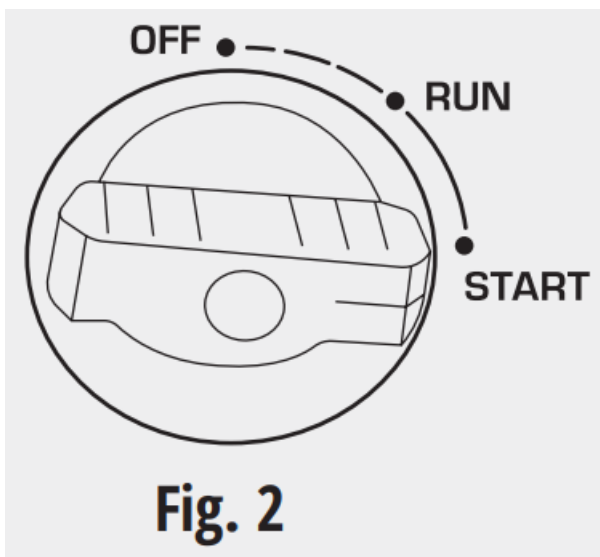

13. If the generator does not start after several attempts, please contact our customer support on the website: ks-power.de/en.



Documents / Resources

	KÖNNER SÖHNEN KS Series Running Generator On LPG [pdf] Instructions Running Generator On LPG, KS 2100iG S, KS 3100iG S, KS 5500iEG S, KS Series Running Generator On LPG, KS Series Generator On LPG, Running Generator On LPG, Running Generator, Generator On LPG, Generator
--	---

References

- [Könnner & Söhnen - генератори, садова техніка від виробника](#)
- [Könnner & Söhnen | Generatoren und Gartentechnik](#)
- [Könnner & Söhnen generators and garden technology](#)
- [Könnner & Söhnen Générateurs et Matériel de Jardinage](#)
- [Pagina principală | Könnner & Söhnen](#)
- [Könnner & Söhnen | Generatory i Sprzęt Ogrodniczy](#)