




KRAMER KT-1010 / KT-1010RB User Guide

[Home](#) » [Kramer](#) » KRAMER KT-1010 / KT-1010RB User Guide 

KRAMER KT-1010 / KT-1010RB User Guide



This guide helps you install and use your KT-1010 / KT-1010RB for the first time.



Go to www.kramerav.com/downloads/KT-1010 or www.kramerav.com/downloads/KT-1010RB to download the latest user manual and check if firmware upgrades are available.

Contents

- 1 Step 1: Check what's in the box
- 2 Step 2: Get to know your KT-1010 / KT-1010RB
- 3 Step 3: Mount KT-1010 / KT-1010RB
- 4 Step 4: Connect power
- 5 Safety Instructions
- 6 Step 5: Operate KT-1010 / KT-1010RB
- 7 Documents / Resources
- 8 Related Posts

Step 1: Check what's in the box

1. KT-1010 Touch Panel or KT-1010RB Touch Panel (Reduced Bandwidth)
2. 12V AC/DC power adapter
3. Panel mount bracket
4. 1 Quick start guide
5. Tabletop mount
6. On-wall mount bracket kit
7. Installation screws
8. 1 Allen key

Step 2: Get to know your KT-1010 / KT-1010RB

Top Slide View



Rear Panel View

Rear Panel View



Lower Side View



Left Side View

Lower Side View



Front View

16



17

#	Feature	Function
1	Volume setup button (+/-)	Press to increase/decrease KT-1010/KT-1010RB speaker volume.
2	Up/Down (△/▽) Keys	Press to scroll through the menu options.
3	Exit Button	Press to exit the menu.
4	SD Card Slot and Cover	Add an external memory.
5	Power LED	Power on indication. Orange when loading, then turns green.
6	3 Add-on USB Module Slots	For future use.
7	2 Speakers	To output the sound.
8	4 VESA Mounting Screw Holes (75x75mm)	Connect to a VESA kit to mount on the wall.
9	12V DC Input with Cable Security Lock	Connect to the AC/DC adapter and to the mains.
10	Ethernet PoE RJ-45 Connector	Connect to a PC via a LAN.
11	USB Type A Port	Connect to USB peripherals (such as a keyboard, printer, etc.).
12	Micro USB Port	Connect to USB peripherals (such as a keyboard, printer, etc.).
13	2 Control I/O Ports	For future use.
14	Power ON/OFF Switch	Press to turn power on or off.
15	Headphone 3.5mm Mini Jack	Connect to a headphone.
16	Camera	For video conferencing.
17	Microphone	For video conferencing or audio recording.

Step 3: Mount KT-1010 / KT-1010RB

This section describes KT-1010 but applies also to KT-1010RB.

To mount KT-1010 on a wall using the VESA kit:



1. Unscrew the 2 security screws and separate the wall mounting brackets. Keep screws and rubber washers for later.
2. Secure the on-wall mount to the wall using 2 installation screws and washers (use the built-in level for levelling).
3. Attach the panel mount bracket to the VESA mounting holes on the rear side of the KT-1010 (safety screw openings on top).
4. Slide the panel mount bracket to the on-wall bracket already mounted on the wall.
5. Replace security screws with rubber washers.


To mount KT-1010 on a table:

1. Remove the two panel screws on the rear lower-side panel of the tabletop mount.
2. Pass the cables through the opening on the rear side.
3. Connect the cables to KT-1010.
4. Turn the power switch on the rear of the touch panel (14) to ON.
5. Place KT-1010 into the tabletop mount.
6. Reconnect the lower-side panel using the two panel screws.

Secure KT-1010 from the rear side, via the Tabletop Mount holes, to the VESA mounting holes on the rear side of the KT-1010.

If required, lock the device using the Kensington lock slot on the right lower side of the table-mount top.

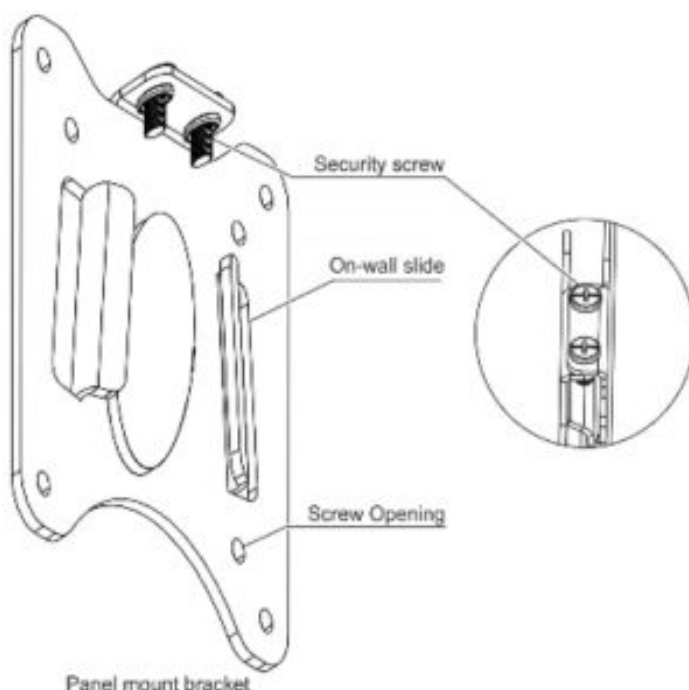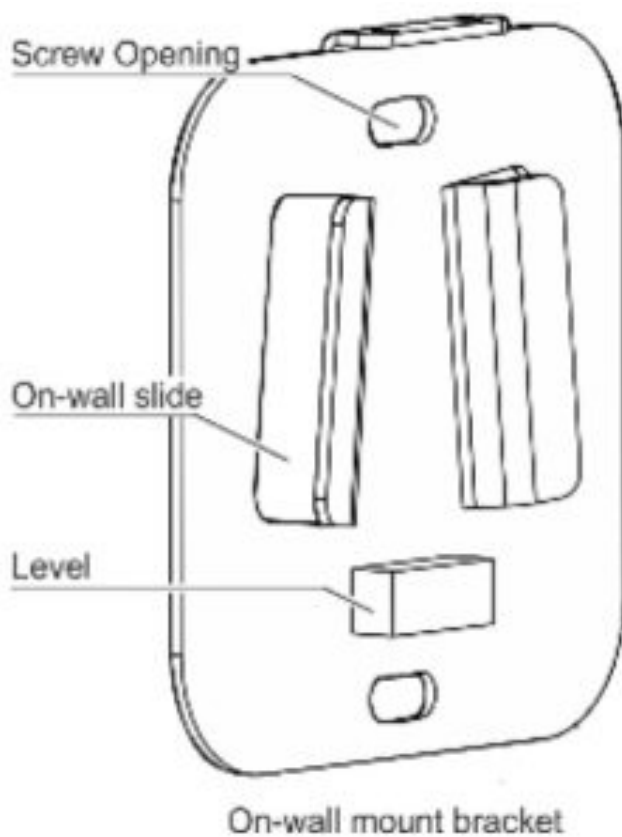

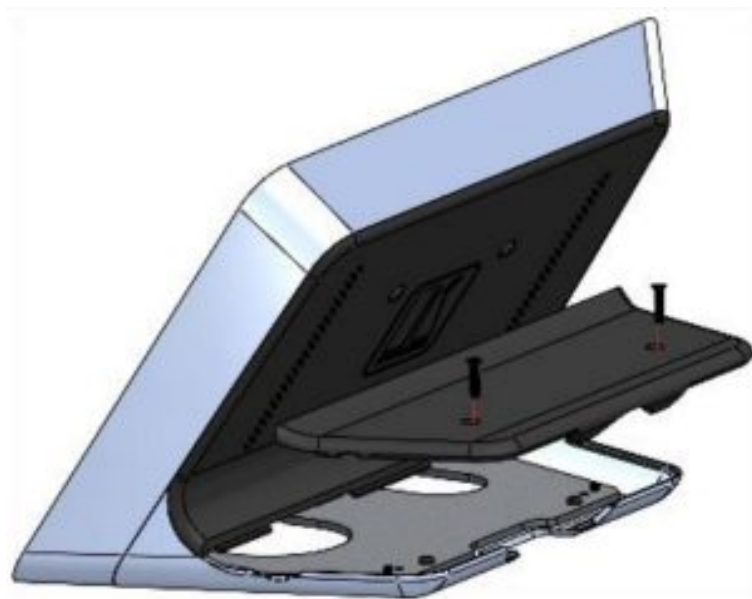

- Ensure that the environment (e.g., maximum ambient temperature & air flow) is compatible for the device.
- Avoid uneven mechanical loading.
- Appropriate consideration of equipment nameplate ratings should be used for avoiding overloading of the circuits.
- Reliable earthing of rack-mounted equipment should be maintained.
- Maximum mounting height for the device is 2 meters.

Step 4: Connect power

Connect the Ethernet port to a PoE Ethernet port, using a PoE-compliant Ethernet cable. Alternatively, or in addition to PoE powering, connect the power adapter to the 12V AC/DC power socket and to the mains electricity.

Safety Instructions

(See www.kramerav.com for updated safety information).



Caution:

- There are no operator serviceable parts inside the unit.

Warning

- Use only the power cord that is supplied with the unit.
- Disconnect the power and unplug the unit from the wall before installing.

Step 5: Operate KT-1010 / KT-1010RB


1. Turn the power switch on the rear of the touch panel to ON.

Wait for Kramer Control log-in page to load.



2. Sign in as follows:

- If the device is connected to the Internet via cable, click SIGN IN on the panel.
- If the device is connected to the Internet via Wi-Fi:

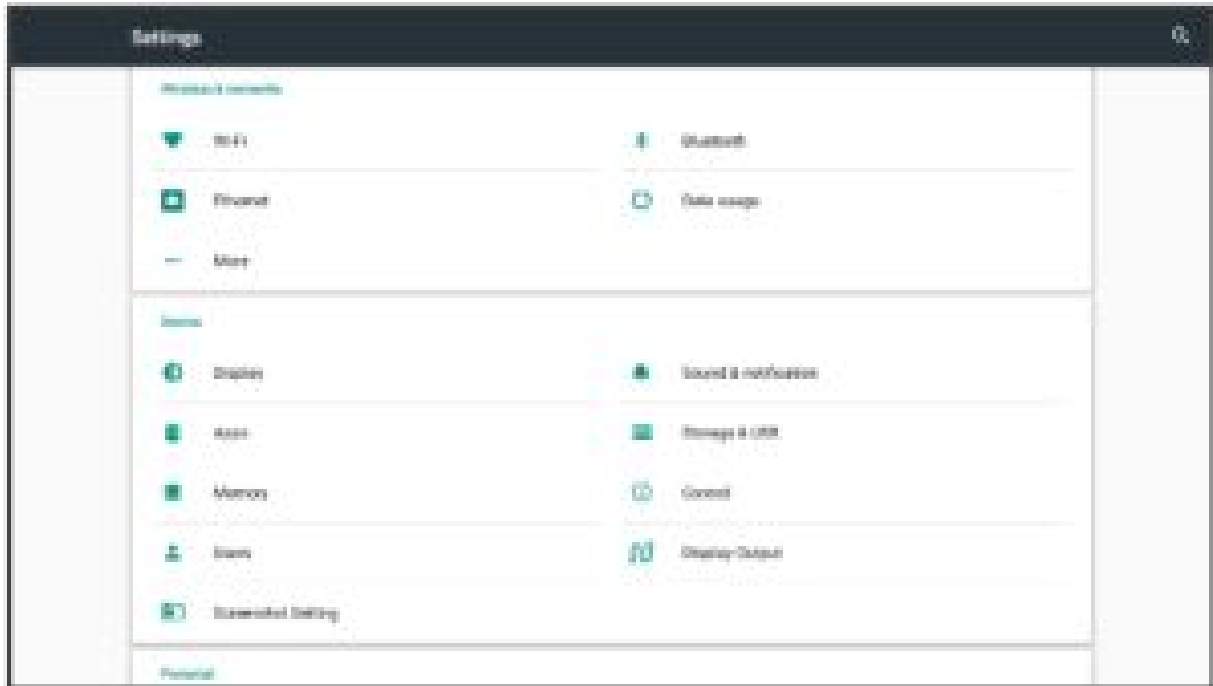

- Press the Exit button (on the KT-1010/KT-1010RB top side) and then type the password (default: Kramer).
- Click Home Page>Settings>Wi-Fi and choose your SSID Network.
- Reboot your device.

KramerAppUpdate automatically updates Kramer apps.

Tap Home-Page>App Icon>KramerAppUpdate to view installed and available app versions and to change the Server Check Interval.

3. Operate the Kramer Control App.

www.kramerav.com



Documents / Resources



[KRAMER KT-1010 / KT-1010RB](#) [pdf] User Guide

KRAMER, KT-1010, KT-1010RB