



## LAB T GS15 Wireless Transceiver User Manual

[Home](#) » [LAB T](#) » LAB T GS15 Wireless Transceiver User Manual 

### LAB T GS15 Wireless Transceiver



## Contents

- 1 Guide System GS-15
- 2 Package Includes
- 3 Product Configuration
- 4 Product Usage
- 5 How to set the volume
- 6 How to set the Mute function
- 7 Battery level display and charging
- 8 FCC Compliance Statement
- 9 Customer Support
- 10 Documents / Resources
  - 10.1 References
- 11 Related Posts

## Guide System GS-15

1. Guide system can be freely used as a microphone or headphones in the transceiver set menu.



2. Products set as microphone are used by connecting an ear set microphone or boom microphone.



Earset  
Microphone



Boom  
Microphone




3. A product set as a headset is used by connecting earphones.



Option



4. It is possible to use 15 groups separately without interfering with each other.

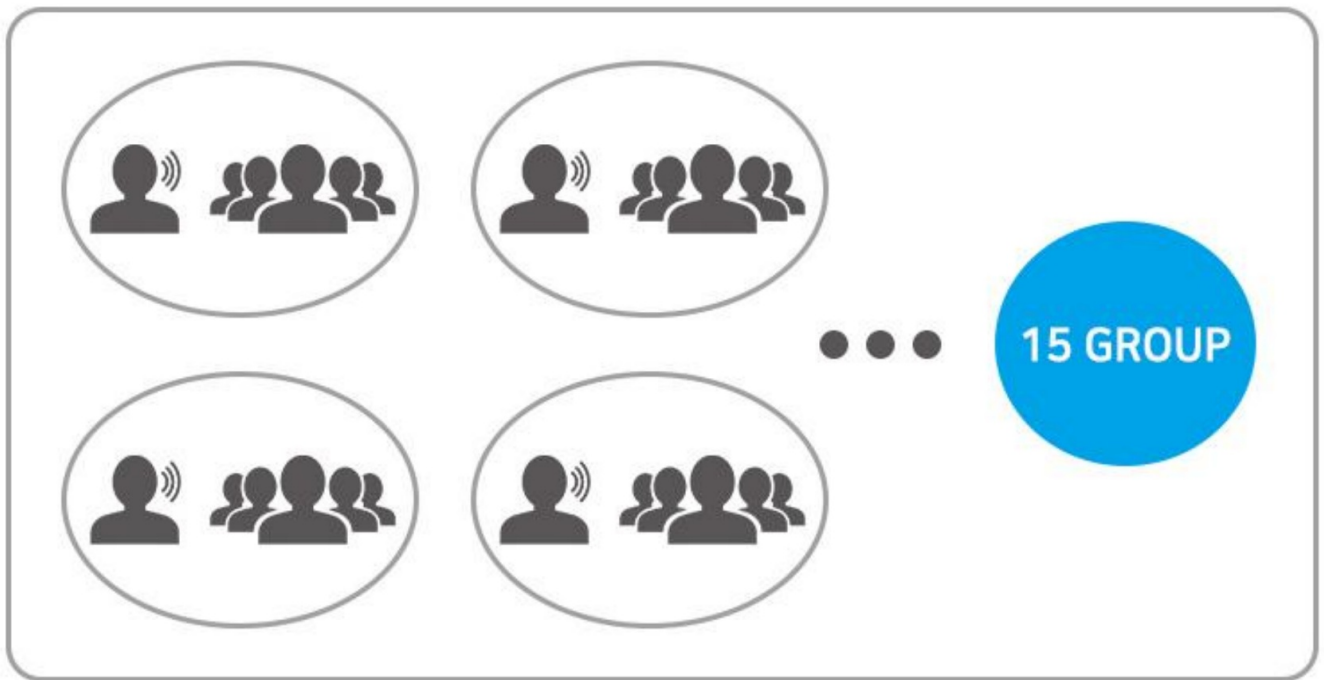

5. To set the menu, press No.4, select No.2~3, and press No.1 to complete.



## Package Includes

## Product Components

- Main body





- USB charger



- Necklace strap



## Product Configuration

1. Power/Select button
2. Up button
3. Down button
4. Menu button
5. Mute button
6. Charge port
7. Microphone or Headphone input port
8. LCD display
9. Antenna strength display
10. Battery level display



Specifications


The battery used in this product is less than 400Wh/L.

	Item	Specification
	Using Frequency	2.4GHz
	Modulation	FSK
	Transmit Power	TX Power 3dBm
	Operating Temperature	-10°C~50°C
	Power Source	Li-polymer 3.7 V
	Size	38x65x18±2mm (W.H.D)
	Wight	33 ± 2gram
Adaptor	Output Voltages	DC 5V 1A/AC 100-240V

Product Usage


- Power ON/OFF

Press and hold the power button for about 3 seconds to turn ON/OFF the power.

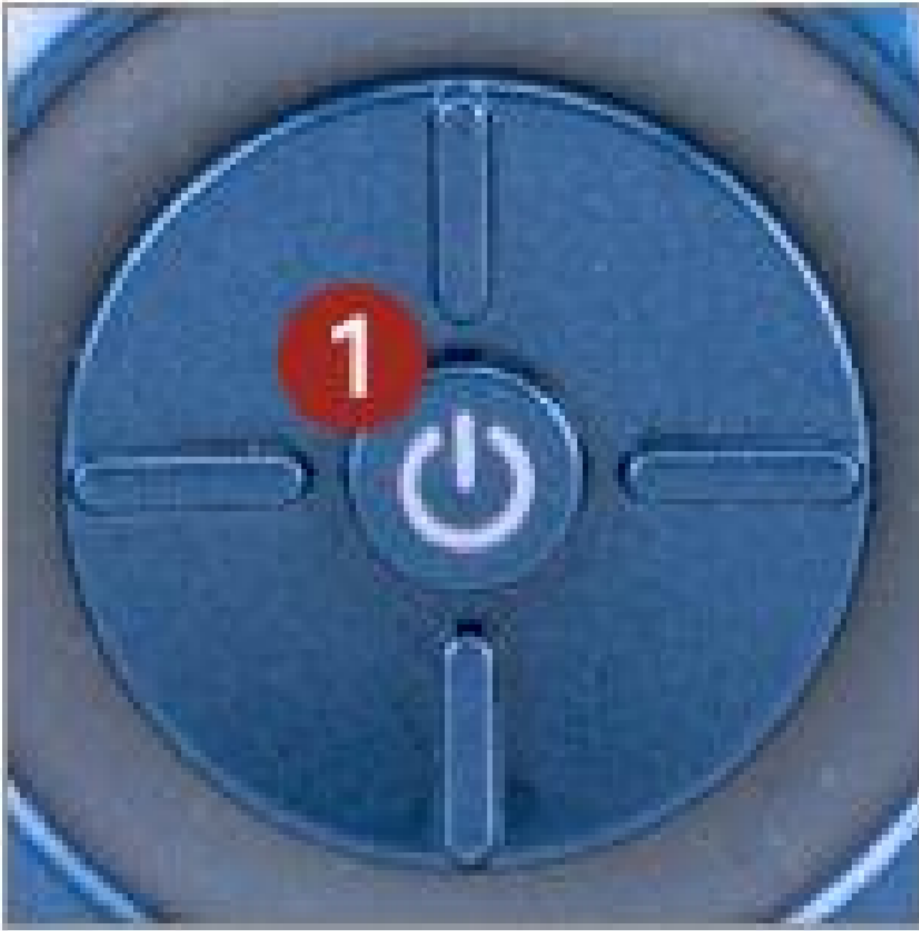

- How to set menu

1. 4 press the button to display the menu screen.

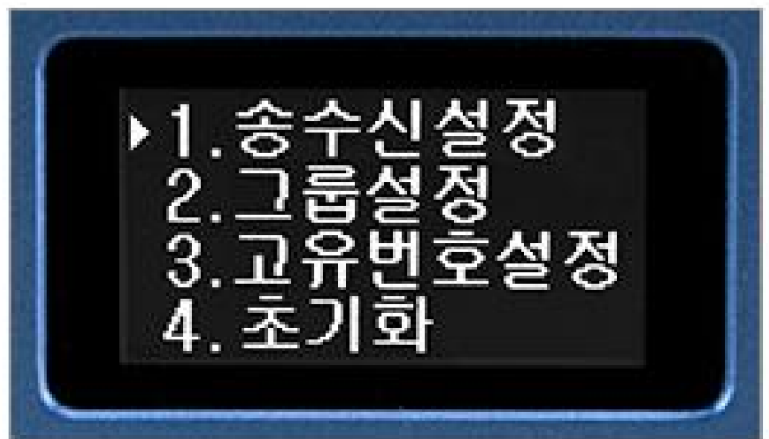

2. To move to the menu, press the No.2 and No.3 button.






3. Press No.1 button to select.



#### 1. How to setup Microphone/Headphone?

**Changes cannot be made while the microphone and headphone are connected to each other.**

1. 4 press the button to display the menu screen.

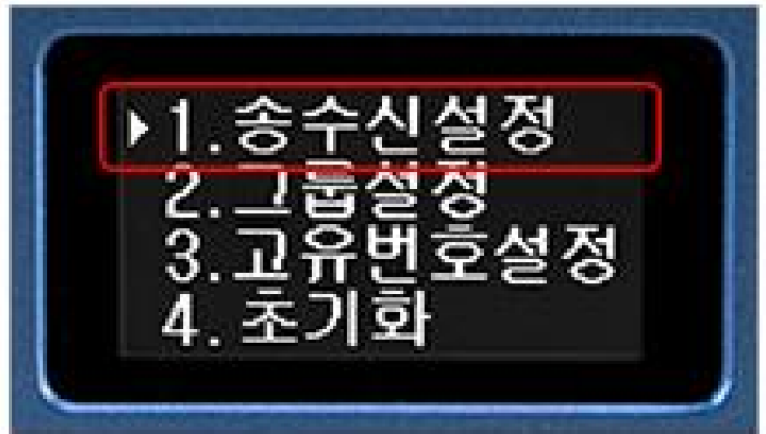

2. Press No.1 button for selection. 1.Headphone 2. Microphone is displayed.




3. To move, press No.2(Up), No.3(Down) buttons, and to select, press No.1 button.




## 2. How to setup a group

1. Press No.4 button to display the menu screen.

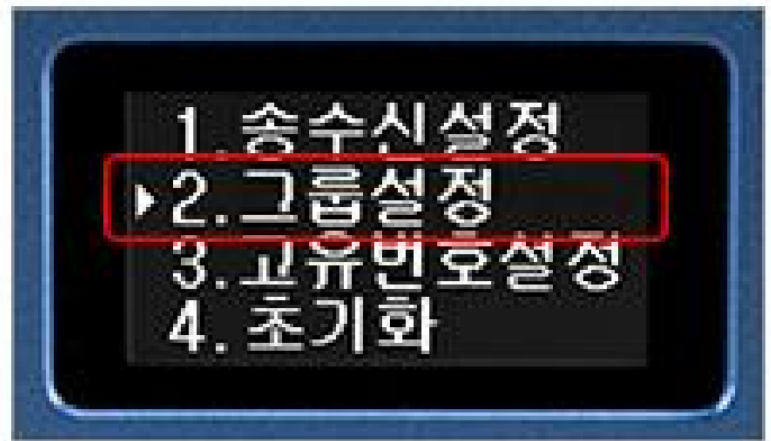

2. Press No.2(up), No.3(down) button to set the desired group number.




3. Groups can range from 1 to 15. Press No.1 button to finish.



### 3. How to set unique number

1. Press No.4 button to display the menu screen.

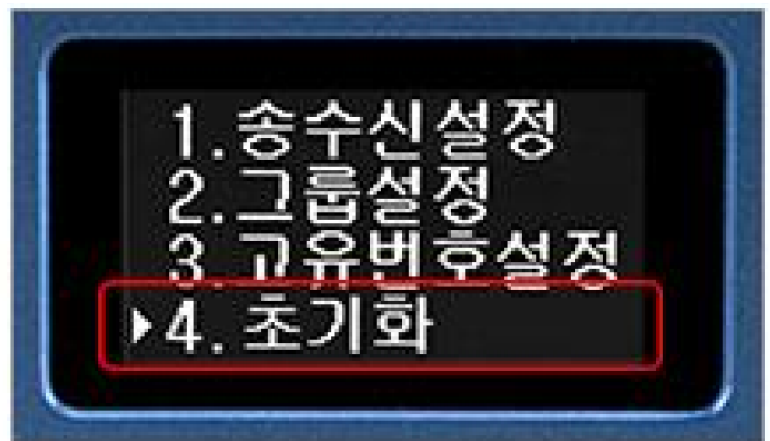

2. Press No.2(up), No.3(down) button to set the desired ID number.



3. ID can range from 1 to 15. Press No.1 button to finish.



## How to set the volume

1. After turning on the power, you can adjust the volume only with the headphones while the microphone and headphone are connected to each other.
2. 2 up 3 press button, set the desired volume level.



The volume level can be set from 1~5 step.



## How to set the Mute function

5 press button, it becomes the mute function, and the headphone and microphone are muted.



## Battery level display and charging

1. If there is one remaining battery level on the LCD, charge the battery.
2. You can charge it using a USB cable.

When charging, the LCD shows charging and when charging is complete, the charging indicator is displayed.



## FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: **(1)** This device may not cause harmful interference, and **(2)** this device must accept any interference received, including interference that may cause undesired operation.

**Note:**



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**CAUTION:** Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment complies its antenna must not be co-located or operation in conjunction with any other antenna or transmitter. This equipment complies with FCC RF exposure requirements set forth in an uncontrolled environment and can be used without any restriction.

## Customer Support

**Manufacturer:** JUNSUNGTECH Co., Ltd.

**Address:** 448-2, Shinwol-dong, Yangchun-gu, Seoul, Republic of Korea

**Tel:** +82-2-2697-2094

**E-Mail:** [ivanchung1@naver.com](mailto:ivanchung1@naver.com)



---

## Documents / Resources

