



# LASER Wireless Keyboard Installation Guide


[Home](#) » [Laser](#) » LASER Wireless Keyboard Installation Guide

Wireless keyboard User Manual  
S110141

## Contents [ [hide](#) ]

- 1 [Illustration:](#)
- 2 [Specifications:](#)
- 3 [Indicator Light :](#)
- 4 [Multi-function Key :](#)
- 5 [Operation Instruction :](#)
- 6 [Maintenance and Warnings:](#)
- 7 [Common connecting problems and solutions:](#)
- 8 [Trouble Shooting](#)
- 9 [Safety Tips](#)
- 10 [Warranty](#)
- 11 [Stand Instruction](#)
- 12 [Documents / Resources](#)
- 13 [Related Posts](#)

## Illustration:

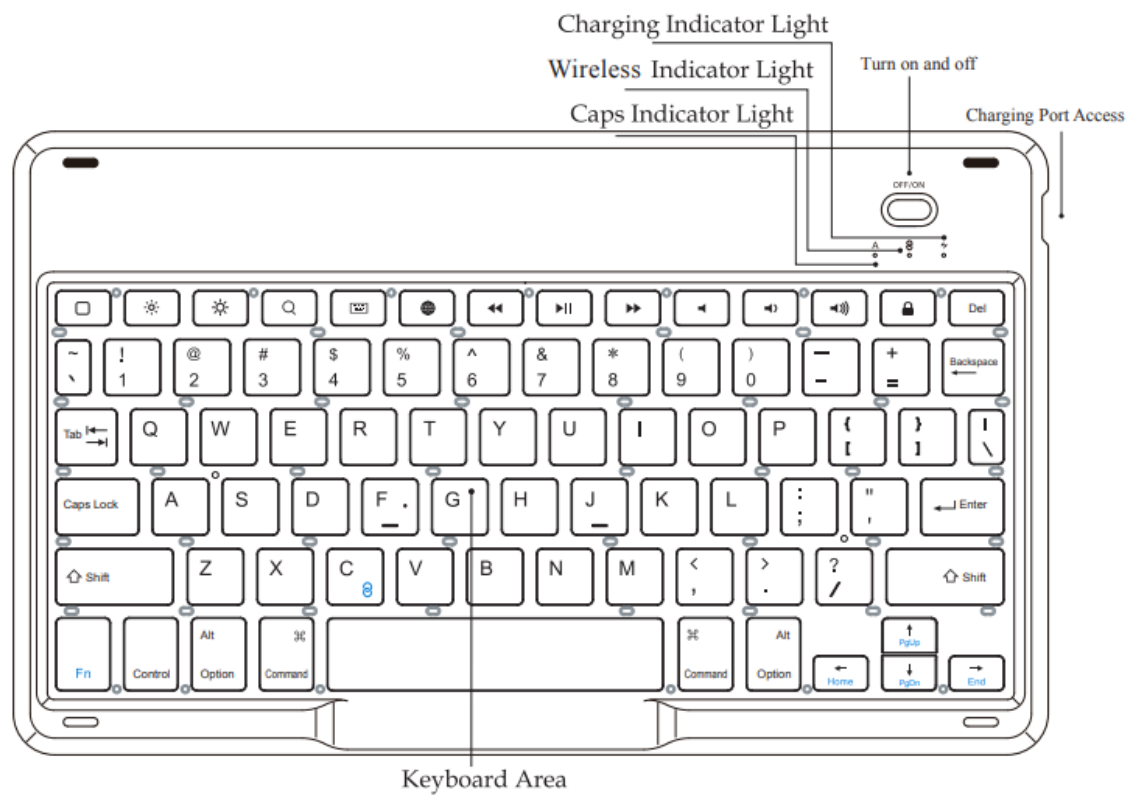

(The blue screen printing on the keyboard should be cooperated with “Fit. For example, if you won’t see the first website, please put the button of “Fn+ up”).


## Specifications:

Working Current	< 3.0 mA	Working Voltage	3.0-4.2 V
Low Voltage Alert	3.0-3.3 V	Working Time	>70 Hours
Battery Standby Time	150 Days	Sleeping Current	<0.3mAh
Battery Lifetime	3 years	Battery Capacity	<180 mA
Charging Port	Micro USB	Keyboard Lifetime	3 Million Times
Charging Time	2-3 Hours	Connect Distance	<10 m
Awaken Time	< 2 Seconds	Charging Current	< 200 mA
Working Temperature	-10°C-55°C	Matching Password	Random

## Indicator Light :

Caps Indicator Light:	Light on means uppercase input, light off means lowercase input.
Wireless Indicator Light:	Press “Fn+C” blinking blue light slowly for keyboard match to the device, light will be off after finishing.
Charging Indicator Light:	Blinking — Low Battery(Red)— Device is Charging(Red)— Charging Complete (Green)

## Multi-function Key :

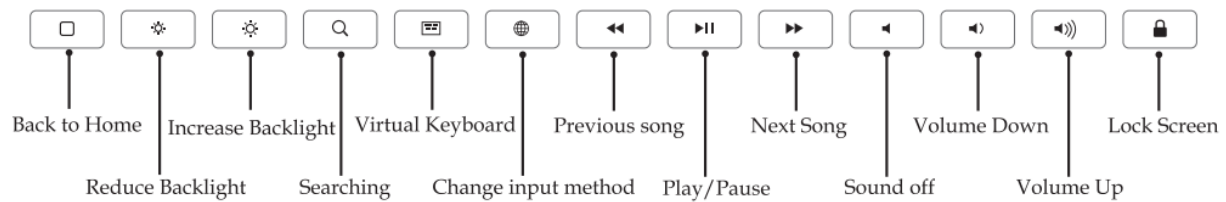

## Operation Instruction :

1. Install device first, and then fold front cover for standing the device.
2. Dial the ON/OFF button in the right direction for opening the keyboard, press “Fn+C” into the Wireless matching condition.
3. Open Wireless on the device, search keyboard name ( Wireless Keyboard) for matching device to keyboard.  
**(Or pair without a password)**
4. Input the numbers which show on the device, and then press Enter key for finishing the match.
5. Now the keyboard is matched with the device, start to use it now.

## Maintenance and Warnings:

1. Do not squeeze, distort or pat on the keyboard
2. Do not scan the keyboard with a microwave. Keep it away from the magnetic field.
3. Keep the keyboard away from liquid. Use it in a dry environment.
4. Use a soft cloth to clean your keyboard. Turn off the power when it's not used for a long time.

## Common connecting problems and solutions:

1. Make sure you have turned on the power and the battery is enough.
2. Make sure the keyboard is within the effective working distance.
3. Make sure the relative Wireless function is open.
4. Make sure the keyboard has paired with the device.

Please Note: This Wireless keyboard will be asleep if no action on it within 10 minutes, press any key for connecting again.

## Trouble Shooting

### Why doesn't the blue LED light to activate when I turn the power switch on?

Your keyboard has no battery power Please charge your keyboard according to the charging instructions.

Why is my smartphone tablet unable to find the keyboard in the Wireless search screen.

Please make sure you press the connect button. You should see the status LED blinking in blue. If the LED is not blinking, your device will not be able to find it.

### I can see the keyboard listed after searching Wireless devices, But it says the connection failed.

Please try to turn OFF the keyboard; delete the Wireless keyboard from the search result list on your smartphone/tablet. Then follow the pairing instructions and try to connect again.

I haven't used my Wireless keyboard for a while. When I attempt to pair the keyboard with my device, the

keyboard asks me to enter a passcode.

When this occurs, please shut down your tablet completely then turn it back on, Also, turn the keyboard off and on again. After doing so, return to the Wireless settings on your device and attempt to pair the wireless keyboard. Note: If your keyboard isn't showing up on the list, ensure it is on and press the Connect button. You will be prompted again to enter a passcode. Click the small blue text that reads,"or, try entering a passcode on it."Finally, use the Wireless keyboard to enter the passcode that is displayed on the screen and hit the enter key.

### **Why can't I type in Spanish, Japanese, or other languages?**

The languages input setting is on your tablet. Our keyboard is the US English keyboard and there are only English letters printed on each key. If your tablet supports Spanish, the keyboard can also type in Spanish, but the position of each key may be different.

Why can't I type when the keyboard is paired?

Please check the INPUT setting on your tablet to make sure all the settings are set to ON status. If not, please turn them on.

### **Safety Tips**

Do not place heavy objects on the keyboard

Do not disassemble the product

Keep the product away from oils, chemicals, and organic liquids

Clean the keyboard with water, alcohol, or an alcohol-based disinfectant Dispose of the battery according to local laws

Keep away from sharp objects

### **Warranty**

This Wireless keyboard is entitled to 12 months free warranty from the date of original purchase and lifetime support for the provision of technical services. If the keyboard fails to work due to a manufacturing defect, please kindly contact the seller for immediate technical supports.

### **The following are excluded from warranty coverage:**

Device purchased as 2nd hand or used


Device purchased from unauthorized retailer or distributor

Damage resulted from misuse and abusive action

Damage resulted from chemical, fire, radioactive substance, poison, liquid Damage resulted from natural disaster

Damage caused to any 3rd party/person/object

### **Stand Instruction**

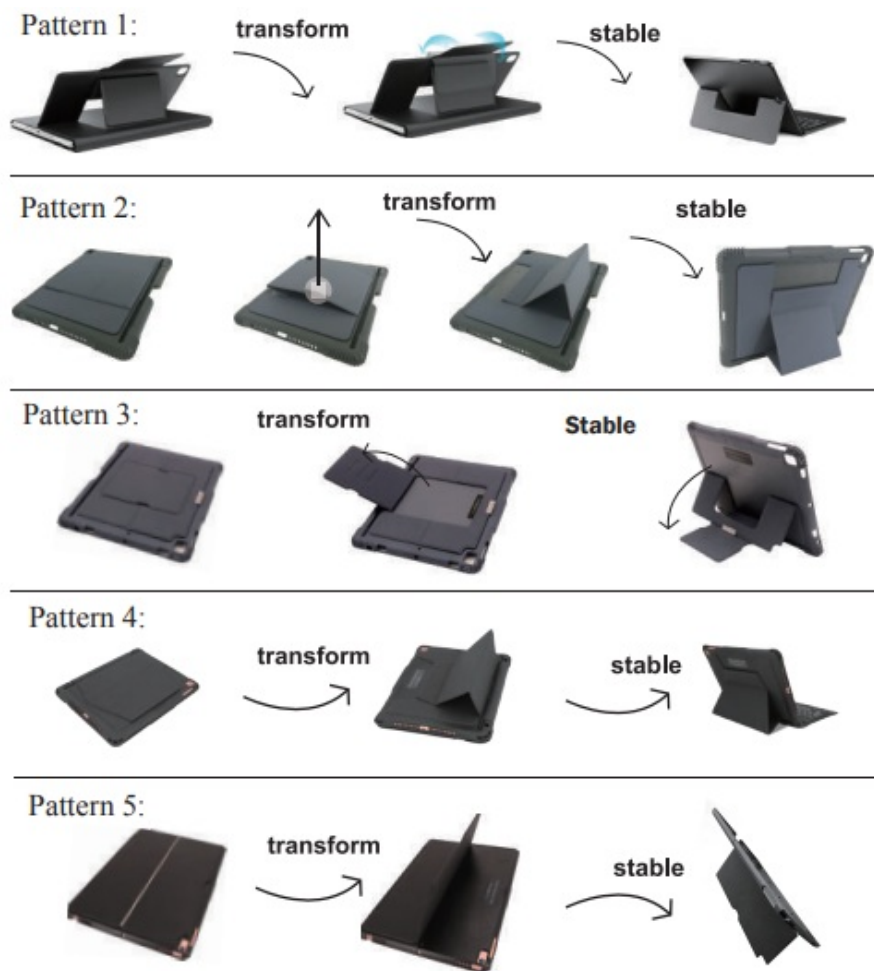

Please contact us timely if you meet with any problem, we will solve them for you as soon as possible.

## Documents / Resources



[LASER Wireless Keyboard](#) [pdf] Installation Guide  
Wireless, Keyboard, LASER, KB-IPAD102, JP141