

LENA LIGHTING HBP02 Touch Panel with Bluetooth 5.0 SIG Mesh Instruction Manual


[Home](#) » [LENA LIGHTING](#) » LENA LIGHTING HBP02 Touch Panel with Bluetooth 5.0 SIG Mesh Instruction Manual 

Contents

- [1 LENA LIGHTING HBP02 Touch Panel with Bluetooth 5.0 SIG Mesh](#)
- [2 Technical Specifications](#)
- [3 Installation](#)
- [4 Operation](#)
- [5 Additional Information / Documents](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



LENA LIGHTING HBP02 Touch Panel with Bluetooth 5.0 SIG Mesh

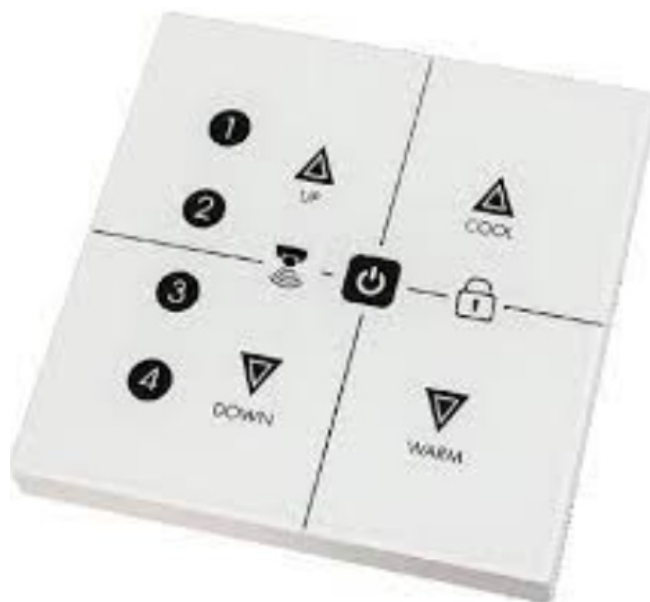



Technical Specifications

Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
Range (Typical indoor)	10~30m
Protocol	Bluetooth® 5.0 SIG Mesh
Operating voltage	220~240VAC 50/60Hz
Stand-by power	<1.5W
Operation temperature	Ta: -20°C ~ +50°C
Relative humidity	20% ~ 90%
IP rating	IP20
EMC standard (EMC)	EN55015, EN61000, EN61547
Safety standard (LVD)	EN60669-1/-2-1 AS/NZS60669-1/-2-1
RED	EN300328, EN301489-1/-17
Certification	CB, CE , EMC, RED, RCM


Installation

Mechanical Structure & Dimensions

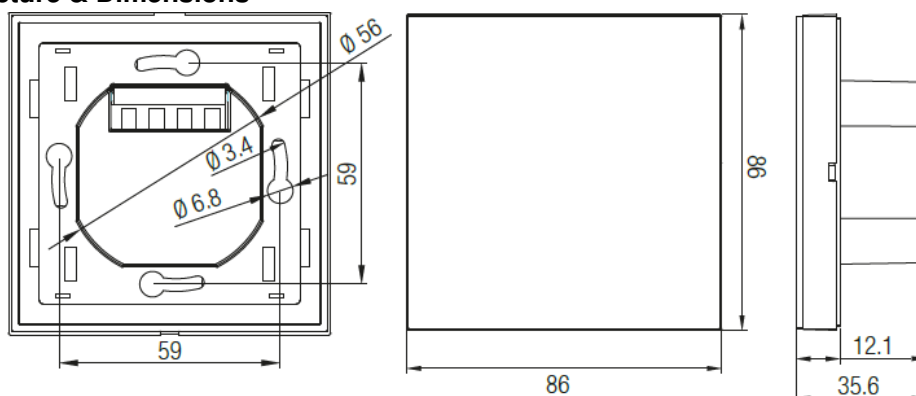

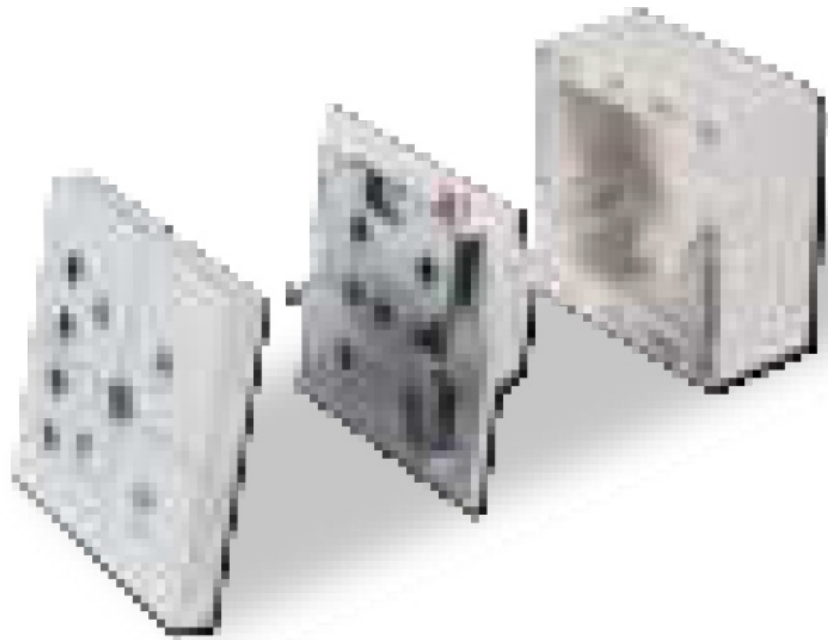


Wiring Diagram

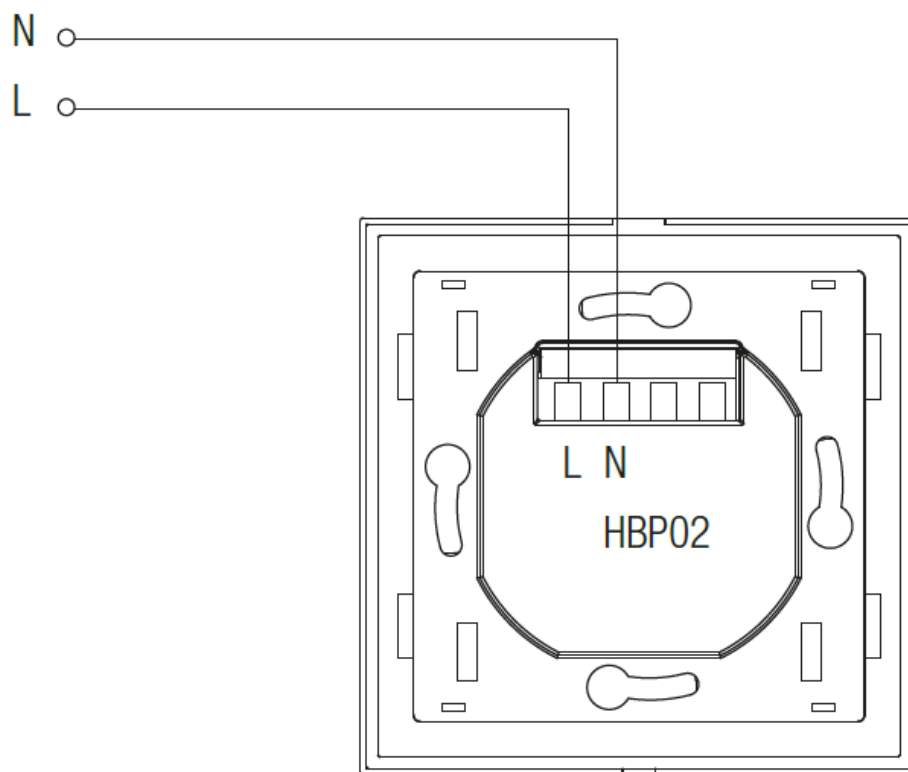

Wire Preparation



Rising clamp terminal.

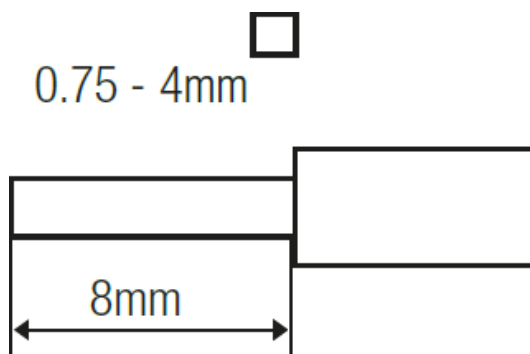

To make or release the wire from the terminal, use a screwdriver to push down the button.

Download the App

Free App for set-up and commissioning



iOS



Android



for iOS




for Android

Smartphone app for both iOS & Android platform



for iPad

Koolmesh Pro app for iPad

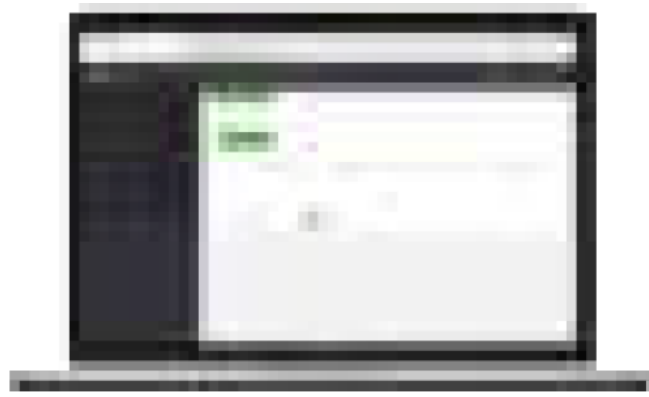

Web



for Web

Web app/platform: www.iot.koolmesh.com

Operation



UP

Brightness



DOWN

Control



COOL

Tunable


White



WARM

Control

① ② ③ ④ Scene Recall

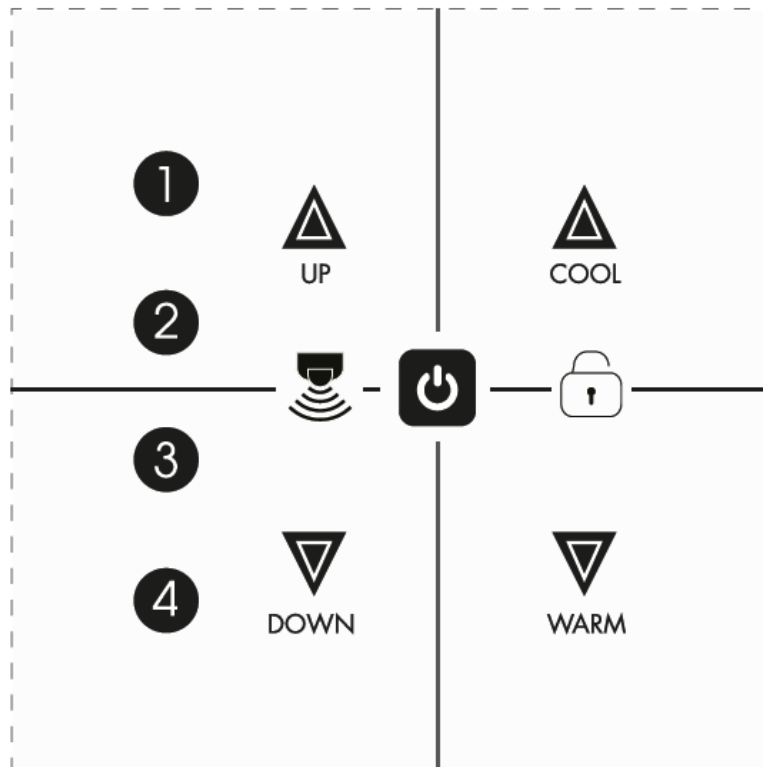

Scenes are simply programmed using the App.

Create and name the scenes using the scenes menu, and then assign the 1 2 3 4 scenes to buttons from the device settings menu.

Senser take over

Press this button to quit manual override mode (Sensors will take over the control).

Clean Mode

Long press this button for more than 5s to go to clean mode (during this clean mode, the touch panel screen will be locked and does not respond to any touch), it will quit automatically after 1 min.

The ON/OFF button has a configurable response via the App.

Permanent OFF (Occupancy sensor disabled). Turning off via the ON/OFF button will suspend the entire system, including occupancy sensor. Pressing this button again will resume the last automatic profile selected, or pressing any other button on the control panel will wake up the system.

Touch Indications

Three methods for successful touch indications:

Vibration / Beeper / LED indicator

User can select any one, two or all of them to indicate successful touch on HBP02 in the App.

Real-time Sustainability

The touch panel HBP02 can keep the time running for up to 7-8 weeks against power failure.


Additional Information / Documents

1. To learn more about detailed product features/functions, please refer to www.hytronik.com/download ->knowledge ->Introduction of App Scenes and Product Functions
2. Regarding precautions for Bluetooth product installation and operation, please kindly refer to



www.hytronik.com/download ->knowledge -> Bluetooth Products – Precautions for Product Installation and Operation

3. Data sheet is subject to change without notice. Please always refer to the most recent release on [www.hytronik.com/products/bluetooth technology](http://www.hytronik.com/products/bluetooth%20technology) ->Bluetooth Accessories
4. Regarding Hytronik standard guarantee policy, please refer to www.hytronik.com/download ->knowledge ->Hytronik Standard Guarantee Policy

Documents / Resources

	<p>LENA LIGHTING HBP02 Touch Panel with Bluetooth 5.0 SIG Mesh [pdf] Instruction Manual HBP02 Touch Panel with Bluetooth 5.0 SIG Mesh, HBP02, HBP02 Touch Panel, Touch Panel, Touch Panel with Bluetooth 5.0 SIG Mesh, Bluetooth 5.0 SIG Mesh</p>
---	---

References

-  [Catalogue_Hytronik](#)
-  iot.koolmesh.com