


## Lighthouse Technologies Limited ST-1362FH All In One LED Display Instruction Manual

[Home](#) » [Lighthouse Technologies Limited](#) » Lighthouse Technologies Limited ST-1362FH All In One LED Display Instruction Manual 

### Lighthouse Technologies Limited ST-1362FH All In One LED Display

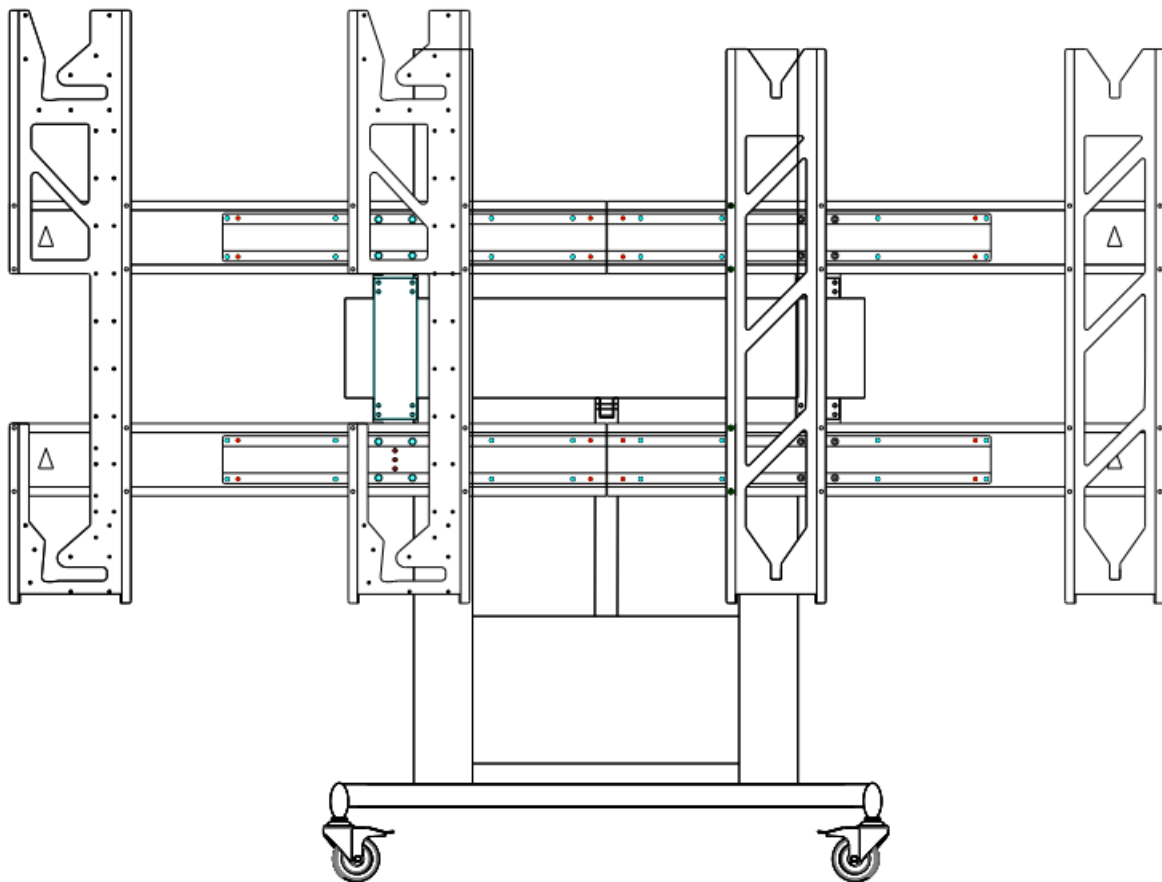

## Contents

- [1 Technical Data](#)
- [2 PRODUCT HIGHLIGHTS](#)
- [3 Dimension](#)
- [4 CHECKLIST](#)
- [5 Installations](#)
- [Instructions](#)
- [6 Packaging](#)
- [7 Documents / Resources](#)

## Technical Data

Type	ST-1362FH
Material	Aluminum profile,Steel
Surface Finish	Coating matte black
Recommended Screen Size	80" – 140"
Rated Weight Capacity	441lbs/ 200kg (Overall)
Max Hole Pattern	750x750x750mm-1062mm
Lift range	490mm
Voltage	100~240v
Certification	CB,CE,FCC,ETL,RoHS2.0,REACH
Stand dimension(with frame)	255.6 x 72.3 x 192cm
Woodencase Dimension	182 x 141 x 71 cm
Weight (Net/Gross)	77.8kg/184.5

## PRODUCT HIGHLIGHTS

- Smooth anodized dual columns with adjustable flat-panel TV height.
- With exclusive patent technology hanging back frame.
- The safe and quiet remote control lifting function can make your TV lift 490MM at will
- High tensile strength steel and rigid aluminum alloy materials.
- Integrated cable management through columns.
- Carry maximum load 441lbs(200kgs) and up to 140" flat panel TV
- Flexible and installer-friendly.


## Caution

- This stand is designed for LAEC015-GN screen. Use with other equipment may result in instability causing

injury

- Manufacturer's name: Lighthouse Technologies (HuiZhou) Limited
- Model number: ST-1362FH
- Equipment name: Motor stand

## Dimension

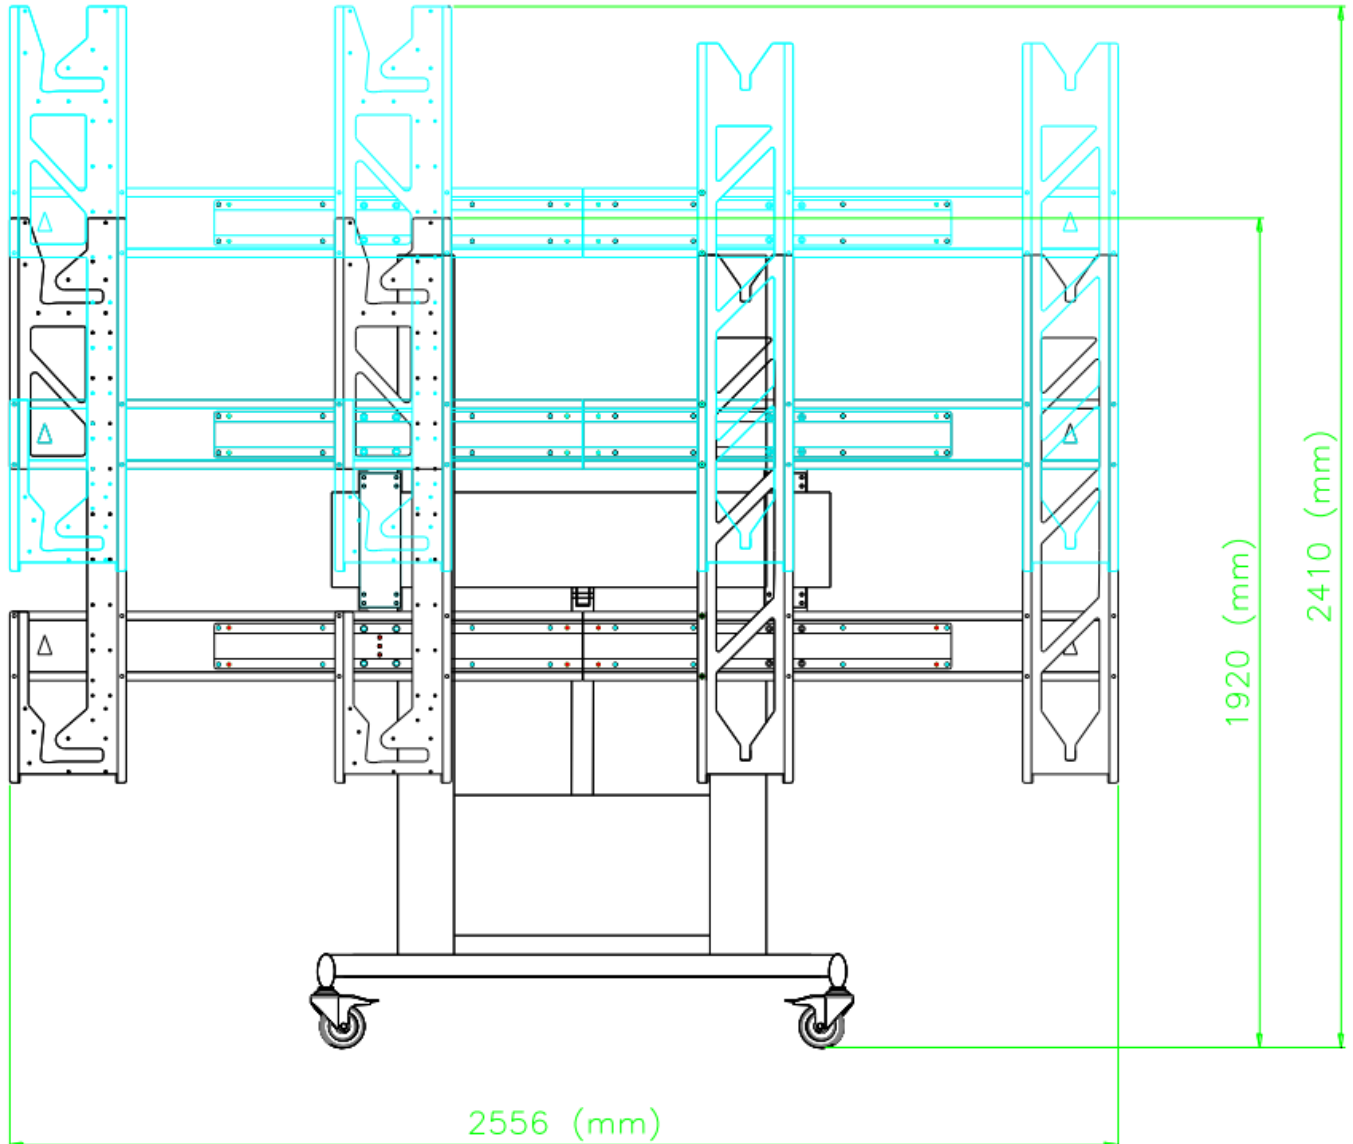




## Warning








**CAUTION**  
**MOVING PARTS**  
**KEEP BODY PARTS AWAY FROM**  
**MOVING PARTS**
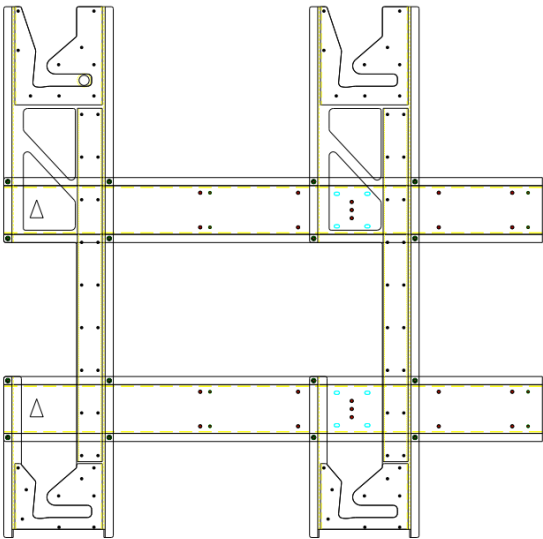
## CHECKLIST

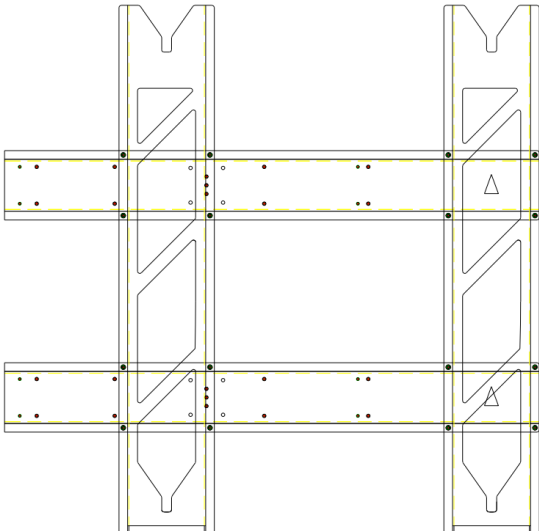Item	Photo	Qty	Description	Item	Photo	Qty	Description
1		1	Stand base	2		1	The main body
3						1	Left panel mounting assembly


4					1	Right panel mounting assembly	
5			Beam reinforce plate	6		10	Cable cover

7			Socket head cap screw – M8X40	8		32	Screw-M4x15
9			Hexagon socket head screw M6X20	10		1	Hex key -#6

## Installations Instructions

Step1. Install the main body to the stand base.

### Front View

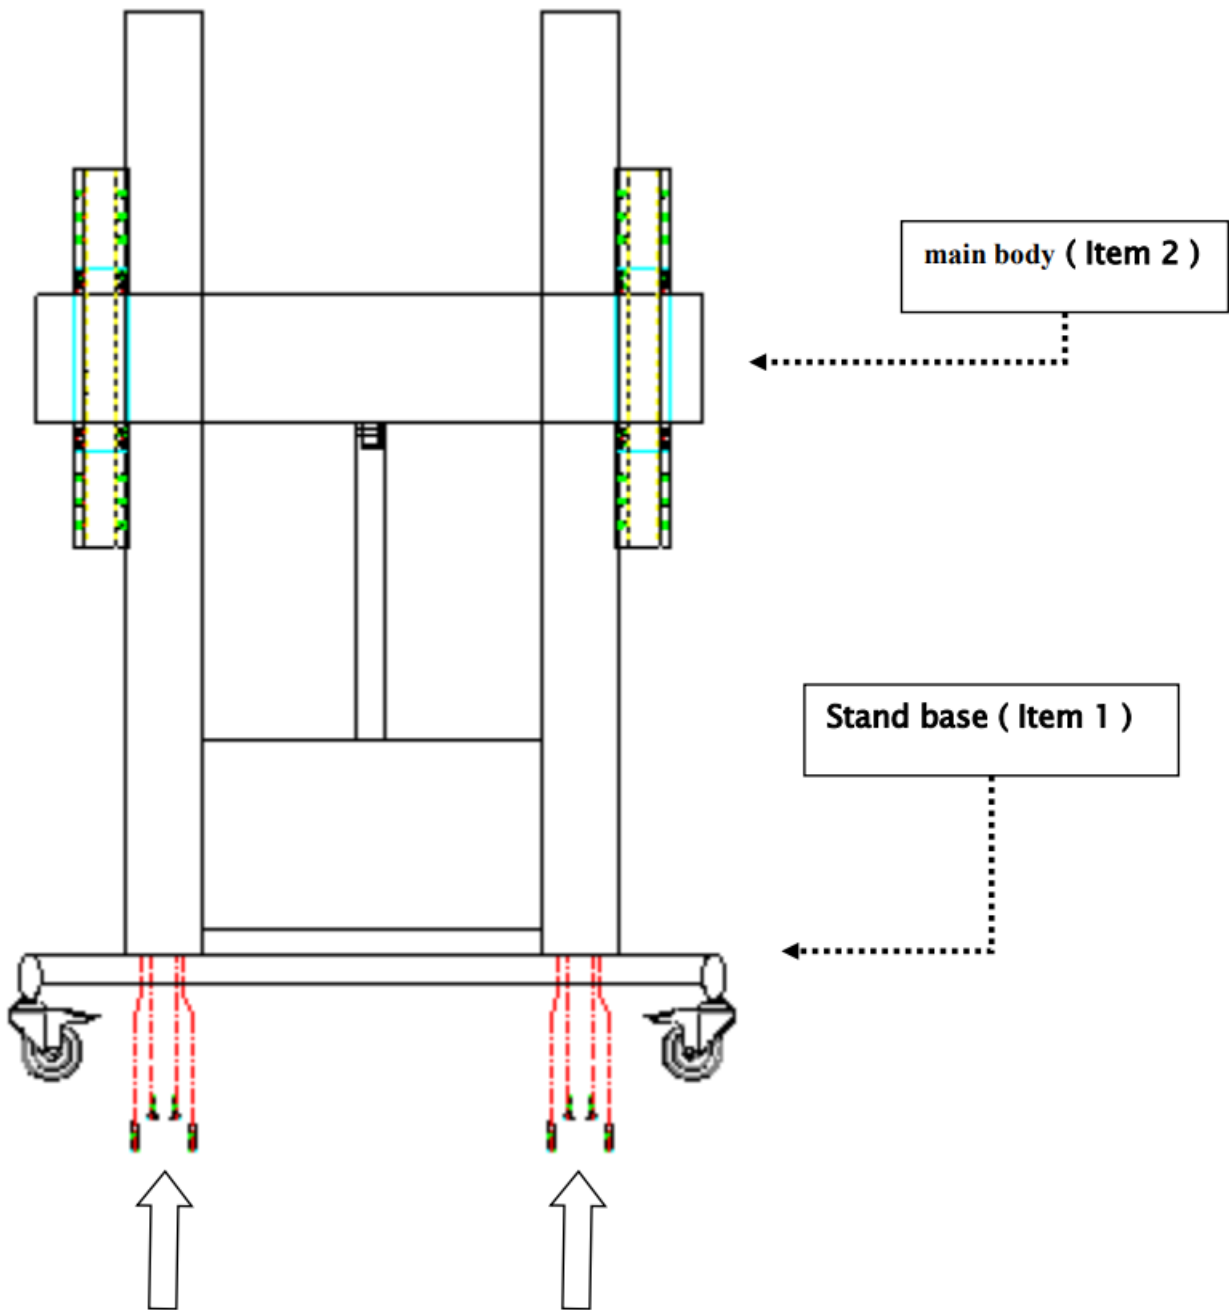


Use 8pcs M8X40 hexagon socket head cap screws (item 7) to install the stand base .


Step2. Install the panel mounting plate.

### **Front View**


Put the left (item 3) and right (item 4) halves

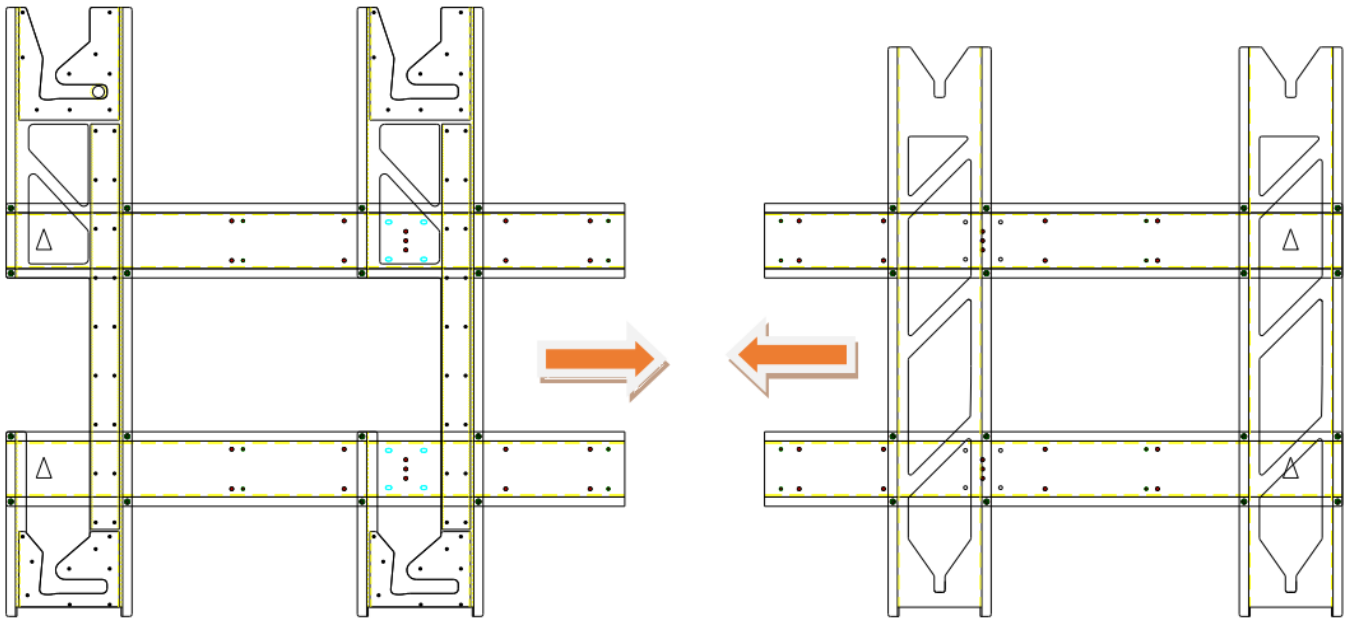

Insert the beam reinforce plate(item 5) to fixing the screw hole position.

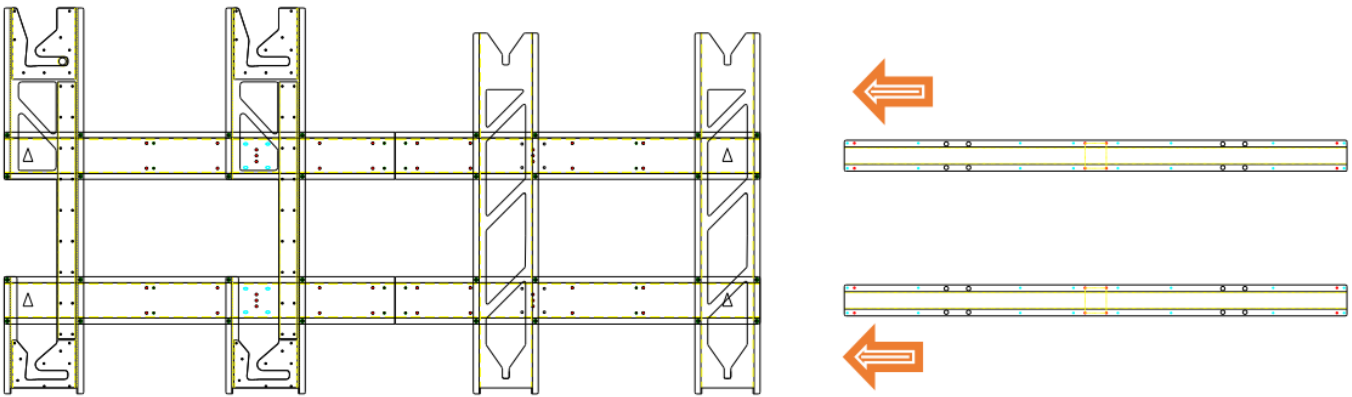


Tighten the beam reinforce plate with 32-M4x15 screw (item 8) as the red circle marked.

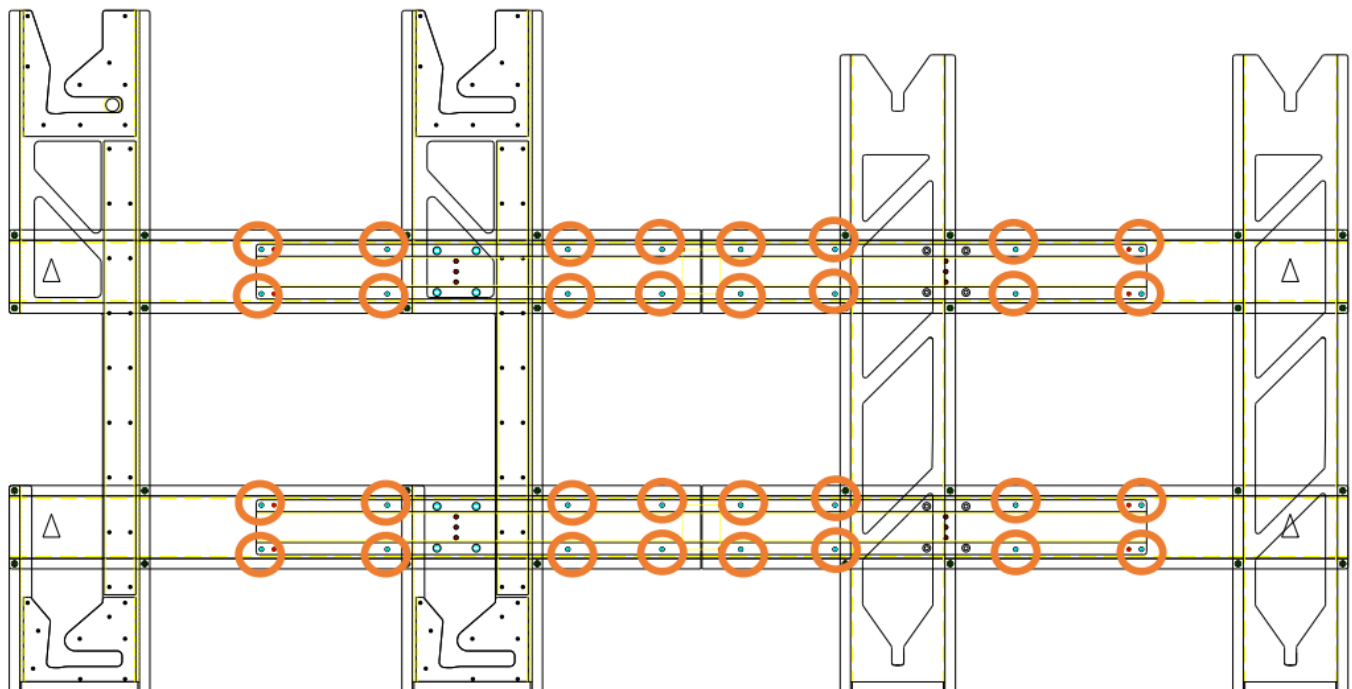


Step3. Install the panel mounting plate to the main body.



## Front View

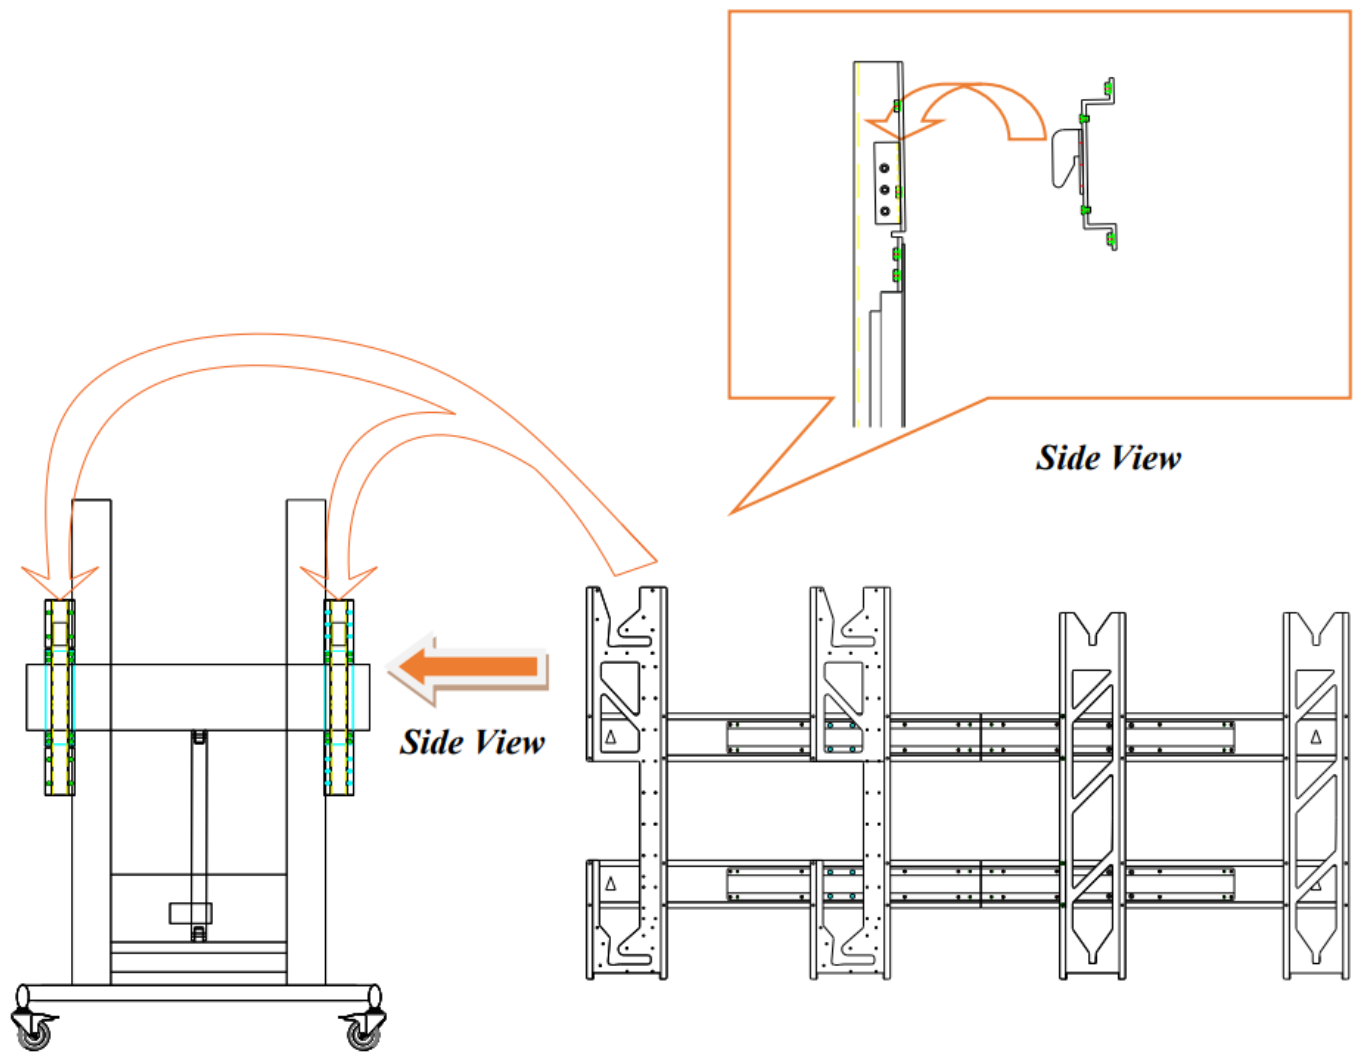


Hang the assembled back frame to the corresponding buckle points of the stand.

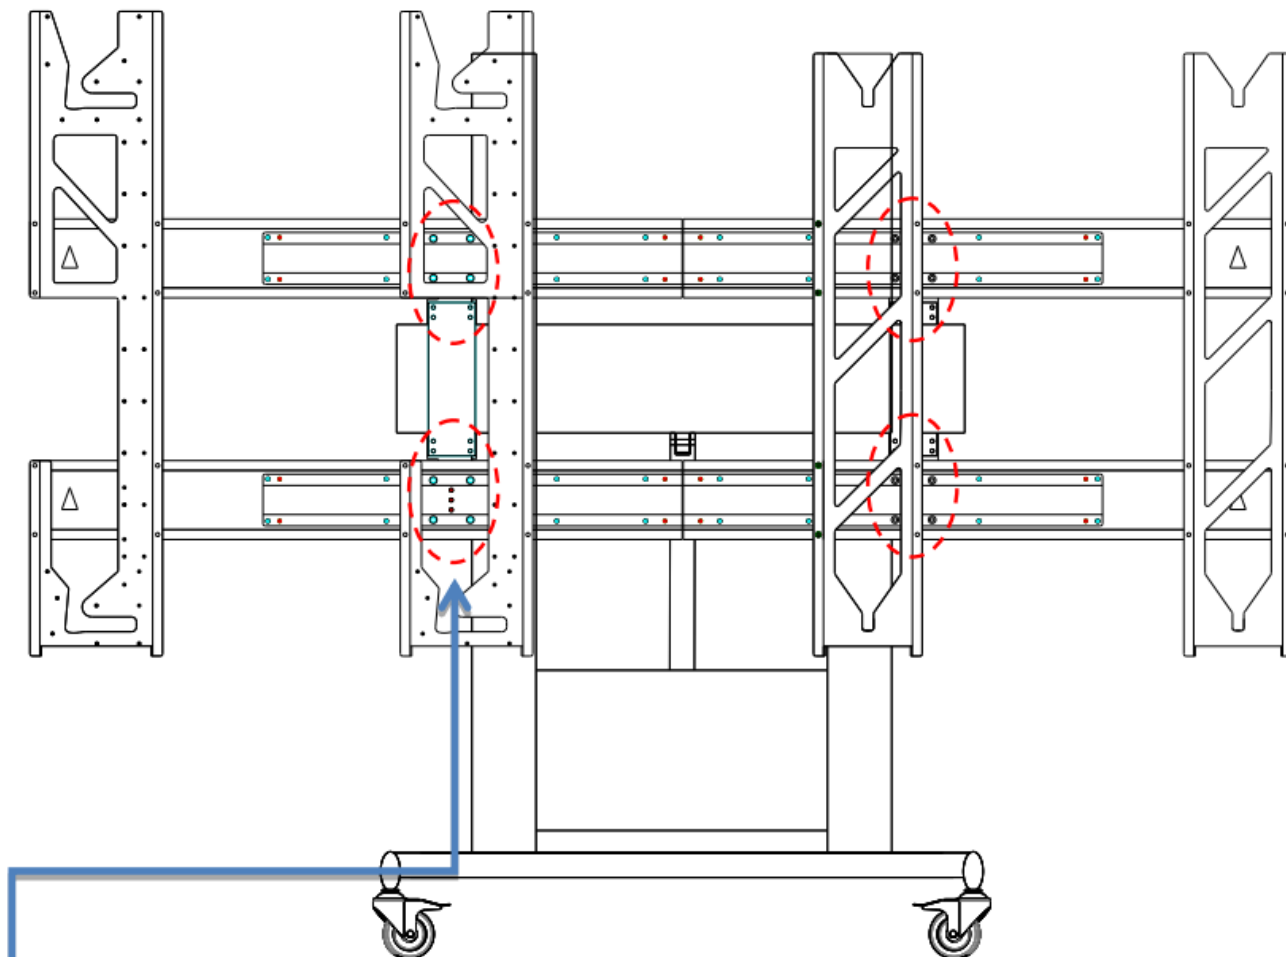


Install the panel mounting plate to the main body. Use 16 pcs M6x20 screw (Item 9)

#### Step4. Lifting cable routing.

Plug the power supply in after installing the Panel as below

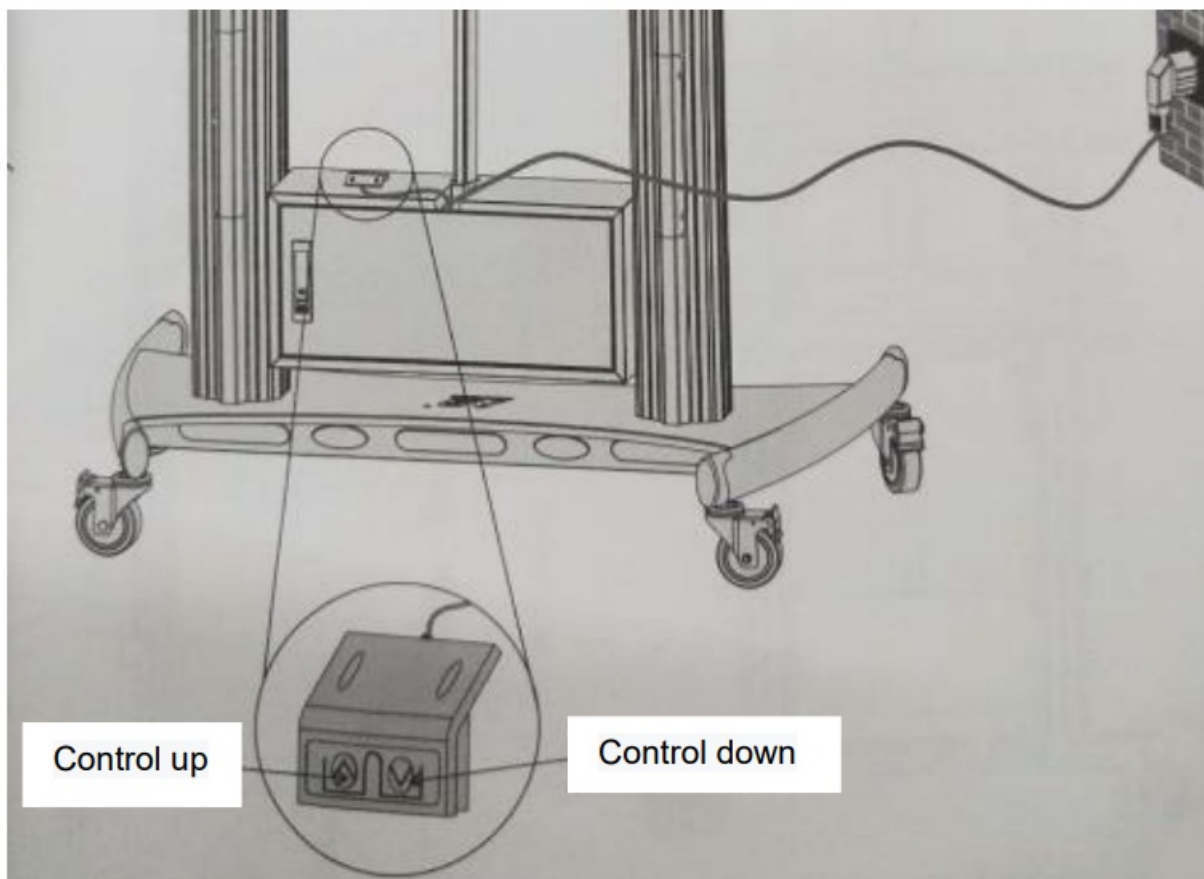

If you would like to hide the lifting cable.  
Please install the cover as Pic 1 and 2.

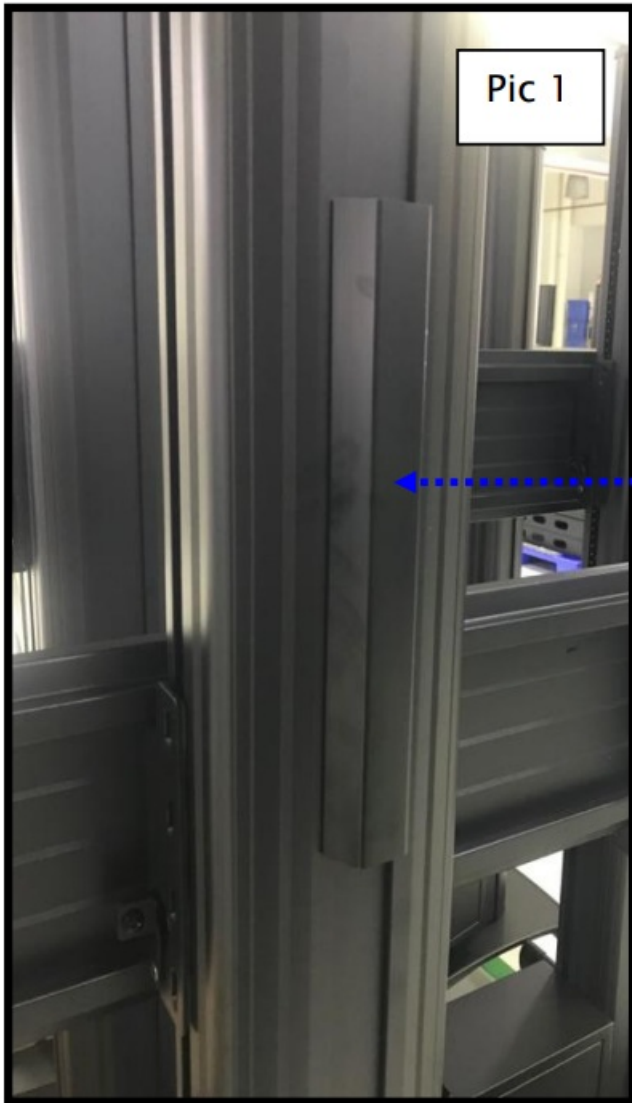

Cable cover (Item 6)

The cable can be hidden under this cover.



Packaging

NOTE: The picture is schematic diagram. Everything is subject to the infact products.



Documents / Resources

	<p><a href="#">Lighthouse Technologies Limited ST-1362FH All In One LED Display</a> [pdf] Instruction Manual</p> <p>ST-1362FH All In One LED Display, ST-1362FH, All In One LED Display, One LED Display, LED Display, Display</p>
---	--