

Batch Deployment Guide

Introduction

Step 1/2: Connecting to Wi-Fi Network

Introduction


Before proceeding with batch deployment, you must configure the Wi-Fi network on one handset (Handset A).

Scenario 1: Handset A is brand new or restored to factory settings

1. Select the language.
2. Connect the Wi-Fi. Select **Quick Wi-Fi Connect**, and press the **OK** Button.



3. Scan the QR Code displayed on Handset A from the mobile phone.
 - 3.1. Use a mobile phone (Android/IOS phone) to scan the Quick Wi-Fi Connect QR code, and the mobile phone browser will pop up the Wi-Fi network configuration page.
 - 3.2 Configure the Wi-Fi name and password on the mobile phone, and then tap **Confirm**.

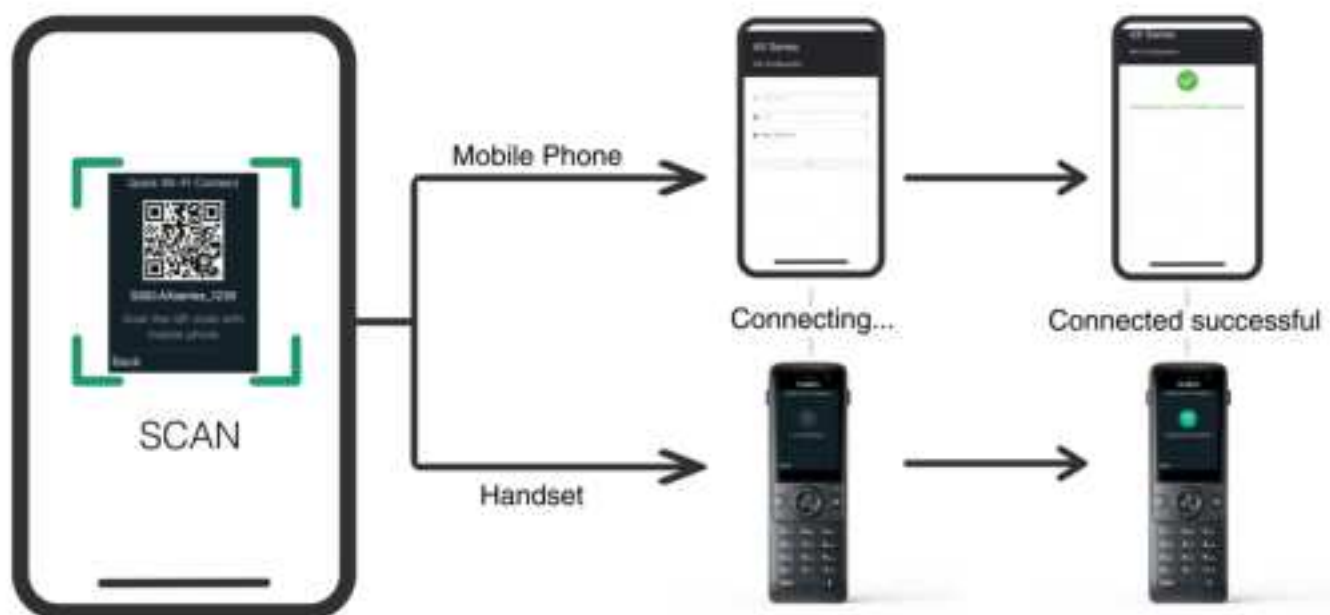**NOTE**

The default encryption method is **WPA/WPA2-PSK**, and the optional value is **WPA3-Personal**

3.3 If the connection fails, press **Reconnect** on Handset A and try again.

**TIP**

Connection Failed Reason:

1. WiFi authentication error: The entered Wi-Fi password is incorrect, and the connection will fail. Please ensure that the password you entered is correct and is case-sensitive.
2. Weak signal (packet loss): If you are too far away from the Wi-Fi router or if there are obstacles such as walls interfering with the signal, it may result in connection failure.
3. Router issues: Sometimes, the router itself may encounter problems, such as configuration errors, outdated firmware, or hardware malfunctions.

4. Set the time zone.
5. On the Handset A, press the **OK** key > **Wi-Fi** to check the Wi-Fi status.



Scenario 2: Change to a new environment

1. On the Handset A, press the **OK** key > **Wi-Fi**.



2. Do one of the following:

- Manual connection:

The AX83H supports dual-band 802.11a/b/g/n WiFi, please refer to the following steps:

- On the Handset A, press the **OK** key > **Wi-Fi**, and set Wi-Fi to **On**.



- Press **Available Networks** and a list of Wi-Fi networks will be displayed.



- Select the desired network to connect.

- Quick Wi-Fi Connect

For detailed information, refer to Step 3 of [Scenario 1: Handset A is brand new or restored to factory settings](#).

Step 2/2: Batch Deployment

Introduction

Once the Handset A is connected to Wi-Fi, you can use the batch deployment feature to deploy the remaining

handsets quickly.


Procedure

1. On the Handset A, press the **OK** key > **Wi-Fi** > **Batch Deployment**.



2. Set the **Hotspot** to **On**.

The default Hotspot SSID is **Axseries_deploy**, and the Hotspot Password is **AXseries@8!**

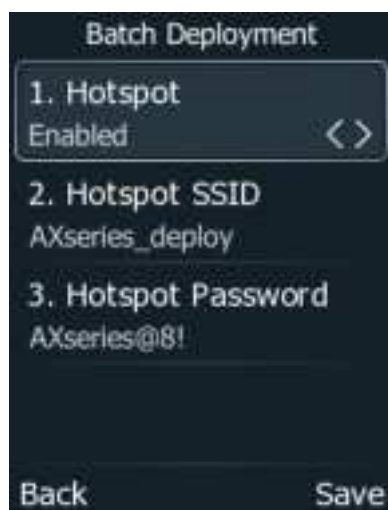

3. Press **Save**. At this point, the Handset A starts providing a hotspot for external connections.

4. The Wi-Fi configurations of Handset A are being synchronized in batch to other handsets.
- **Other handsets:** They will automatically connect to the preset hotspot and also support manual hotspot connection.
 - **Handset A:** It automatically synchronizes its own Wi-Fi configuration information to the AX series handsets that are connected to the deployed hotspot.



5. After successfully obtaining the Wi-Fi configuration, if there is a corresponding Wi-Fi in the environment, the deployment hotspot will be automatically disconnected and the available Wi-Fi network will be successfully connected.