
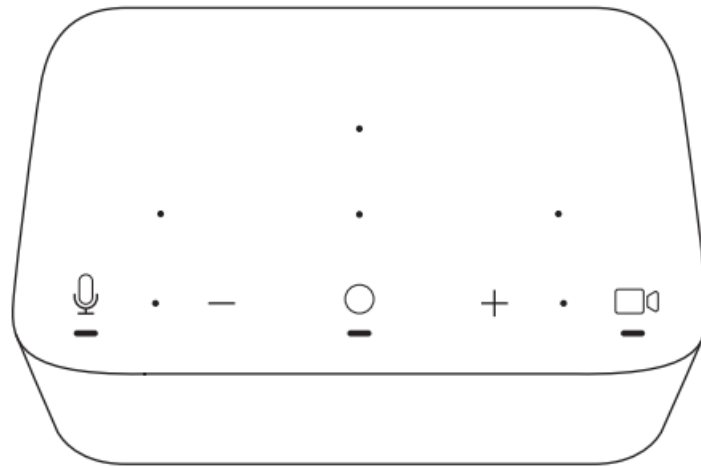





logitech Logi Dock All-In-One Docking Station Installation Guide

[Home](#) » [Logitech](#) » logitech Logi Dock All-In-One Docking Station Installation Guide 

logitech LOGI DOCK All-In-One Docking Station Installation Guide



UC VERSION
UC

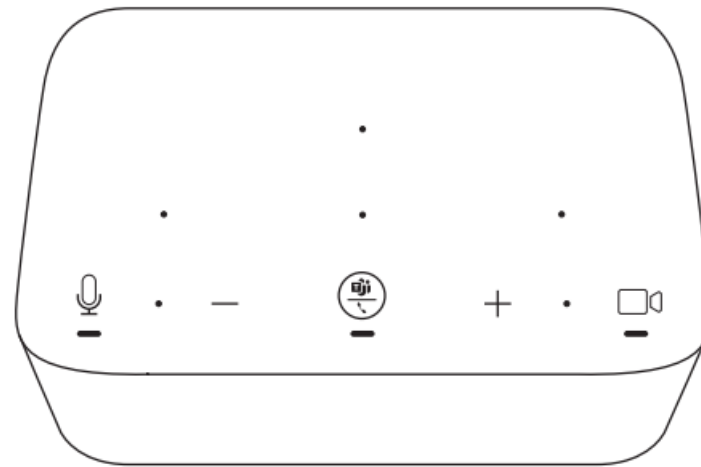


TEAMS VERSION
TEAMS

Contents


- 1 [KNOW YOUR PRODUCT](#)
- 2 [WHAT'S IN THE BOX](#)
- 3 [CONNECTING TO POWER](#)
- 4 [CALENDAR INTEGRATION](#)
- 5 [MEETING CONTROLS AND INDICATOR LIGHT](#)
- 6 [TECHNICAL SPECIFICATIONS](#)
- 7 [Documents / Resources](#)
 - 7.1 [References](#)
- 8 [Related Posts](#)

KNOW YOUR PRODUCT

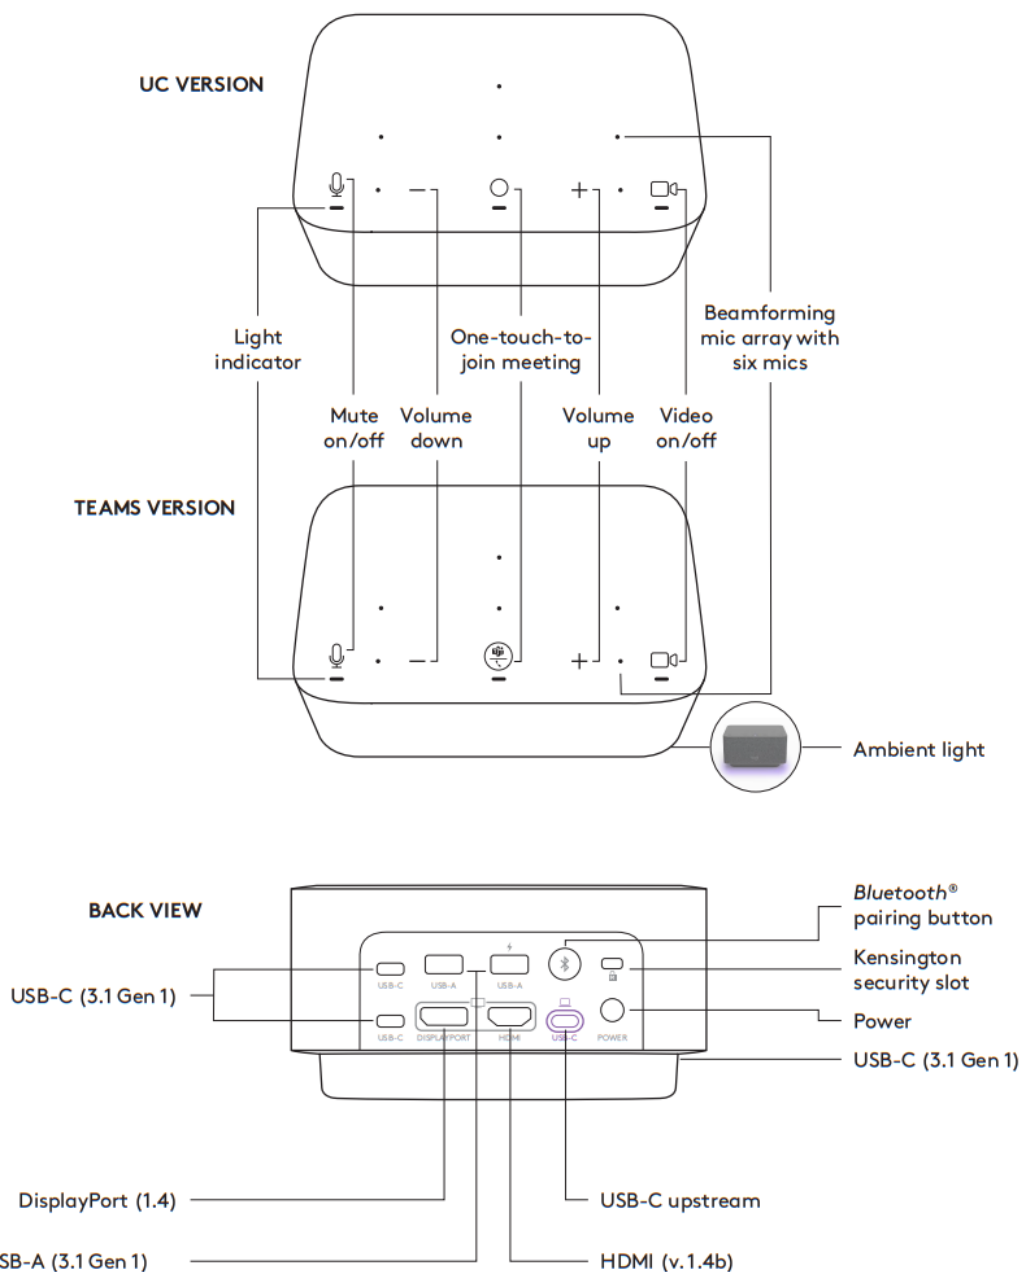

WHAT'S IN THE BOX


1. Logi Dock
2. Power supply (1.6 m)
3. AC power cord (1.7 m)
4. USB-C to USB-C cable (1 m)
5. User documentation

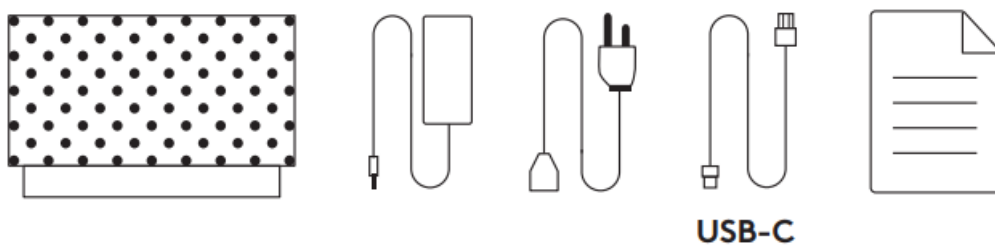

CONNECTING TO POWER

1. Connect one end of the AC power cord to the power supply, and connect another end to an outlet

2. Connect the power supply to the AC power port on the docking station

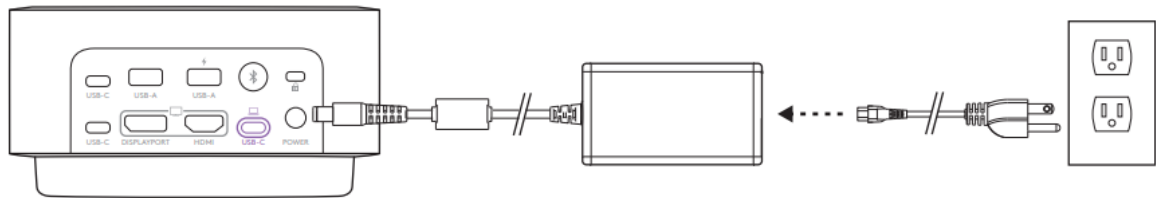

CONNECTING VIA USB-C CABLE


Connect one end of the USB-C cable to the USB-C upstream port on Logi Dock, and connect another end to the USB-C port on your computer



LOGI TUNE APP

Download and install Logi Tune from www.logitech.com/tune for calendar integration with Google Calendar and Office 365, and one-touch meeting controls

www.logitech.com/tune

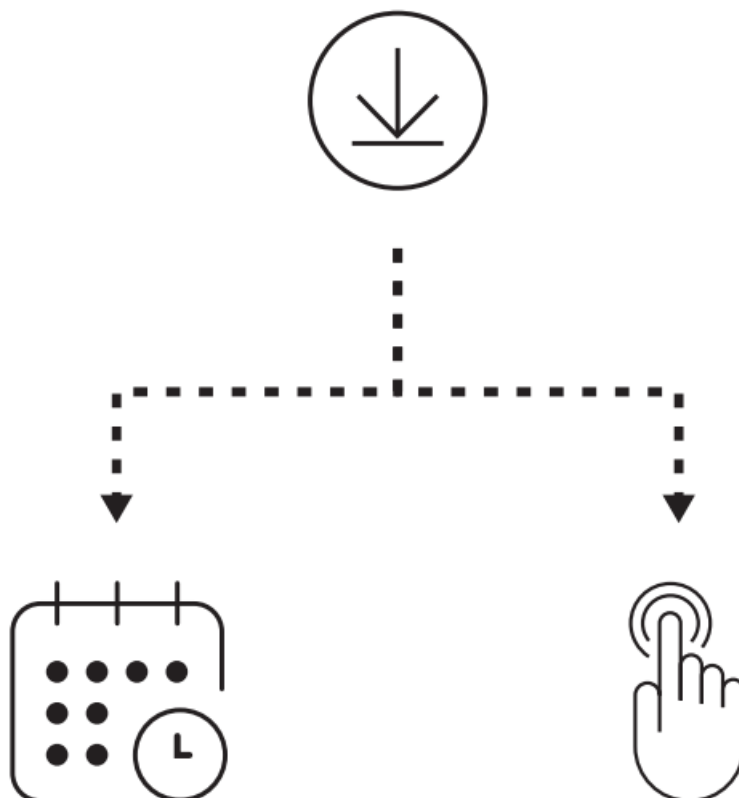






CALENDAR INTEGRATION

1. Open Logi Tune app on your computer
2. Link your preferred calendar and authenticate with your calendar provider Then follow the steps in the app
3. Your agenda will show up in the dashboard upon successful link

ONE-TOUCH MEETING CONTROLS


1. Link your calendar with Logi Tune
2. Make sure Tune is running in the background You can see the app in the taskbar if Tune is active
3. One-touch-to-join will be activated by default
4. To deactivate, visit device settings in the Tune app






MEETING CONTROLS AND INDICATOR LIGHT

UC version				
Button	Usage		Indicator light	Action
	Mute	Mute on	Solid RED	Short press
		Mute off	Solid WHITE	
	Call Controls	Idle state	–	Short press to invoke/close Tune
		Time of meeting	Flashing PURPLE	–
		Incoming call	Flashing WHITE	Short press to answer call
				2 seconds press to reject call
		Active call	Solid WHITE	Short press to end call
	Volume	Volume up	–	Short press
		Volume down		
	Video	Video on	Solid WHITE	Short press
		Video off	Solid RED	

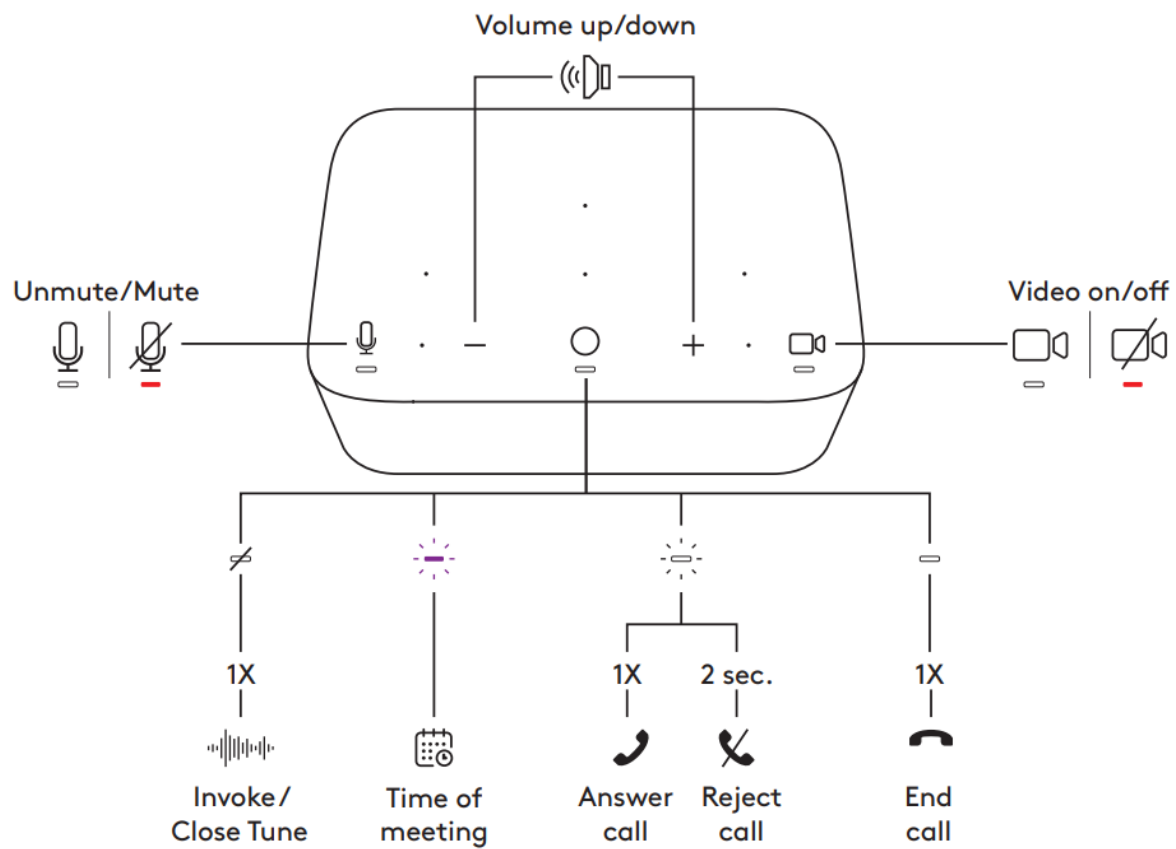Note:


- When the Zone Wireless (Plus) headset or Zone True Wireless earbuds are connected to Logi Dock, both speakerphone and headset status will be in sync
- Mute indicator light is available when Logi Dock, Zone Wireless (Plus) headset or Zone True Wireless earbuds are the audio source Video indicator light is available for UC or Teams-certified devices only












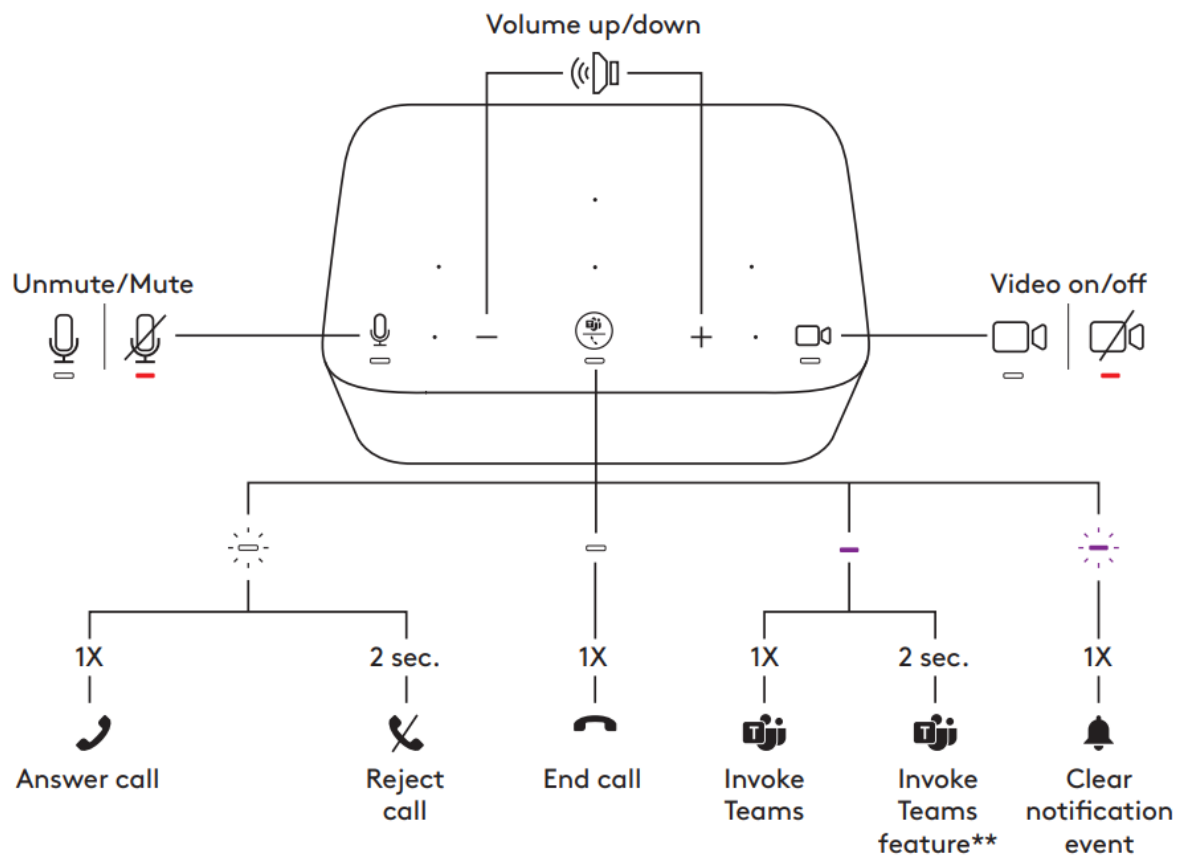





TEAMS version				
Button	Usage		Indicator light	Action
	Mute	Mute on	Solid RED	Short press
		Mute off	Solid WHITE	
	Call Controls	Incoming call	Flashing WHITE	Short press to answer call
				2 seconds press to reject call
		Active call	Solid WHITE	Short press to end call
	Teams Activities	Idle state	Solid PURPLE	Short press to invoke Teams
		Active call		Short press to transfer audio from other active device*
				2 seconds press to invoke Teams feature**
		Teams notification	Flashing PURPLE	Short press to clear notification event
	Volume	Volume up	–	Short press
		Volume down		
	Video	Video on	Solid WHITE	Short press
		Video off	Solid RED	

Note:

- Teams activities are only functional when Teams is running on an unlocked PC or Mac
- When the Zone Wireless (Plus) headset or Zone True Wireless earbuds are connected to Logi Dock, both speakerphone and headset status will be in sync
- Mute indicator light is available when Logi Dock, Zone Wireless (Plus) headset or Zone True Wireless earbuds are the audio source Video indicator light is available for UC or Teams-certified devices only
- *If Zone Wireless (Plus) headset or Zone True Wireless earbuds are connected directly to Logi Dock and you are in an active call, a single press on Logi Dock will end the call instead of transferring an active call
- **Refer to www.logitech.com/support/Logi-Dock-compatibility for the latest Teams feature updates



AMBIENT LIGHT

UC version/TEAMS version			
			
	Left	Middle	Right
Calendar entry			
Time of the meeting			
Incoming call			
On call			
Mute on			
Mute off			
Video on			
Video off			
Bluetooth® pairing			
Pairing mode		 5 sec.	
Paired			

Note:


- Ambient light (for mute) is available when Logi Dock, Zone Wireless (Plus) headset or Zone True Wireless earbuds are the audio source Ambient light (for video) is available for UC or Teams-certified devices only


Tip:

- Ambient light customization available on Logi Tune

CONNECTING USB DEVICES


- Logi Dock has 5 USB ports: 2 USB-A and 2 USB-C ports on the back panel; 1 USB-C port on the side
- Simply connect your external USB devices such as a keyboard and mice with the USB-A or C ports

Note: Please charge your iOS device via USB-A or C ports with charging port icon () only when the Logi Dock is disconnected from the laptop

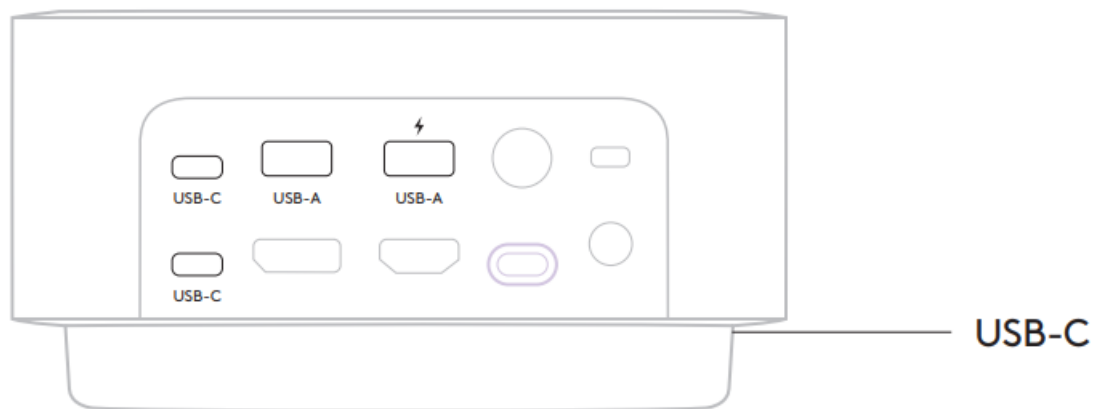

CONNECTING BLUETOOTH® -ENABLED MOBILE DEVICES


1. Press the Bluetooth® pairing button at the back panel for 3 seconds The ambient light in front will blink blue
2. Open Bluetooth® settings on your mobile device
3. Select Logi Dock in discoverable devices
4. Once successfully paired, the ambient light will turn solid blue for 5 seconds with sonification

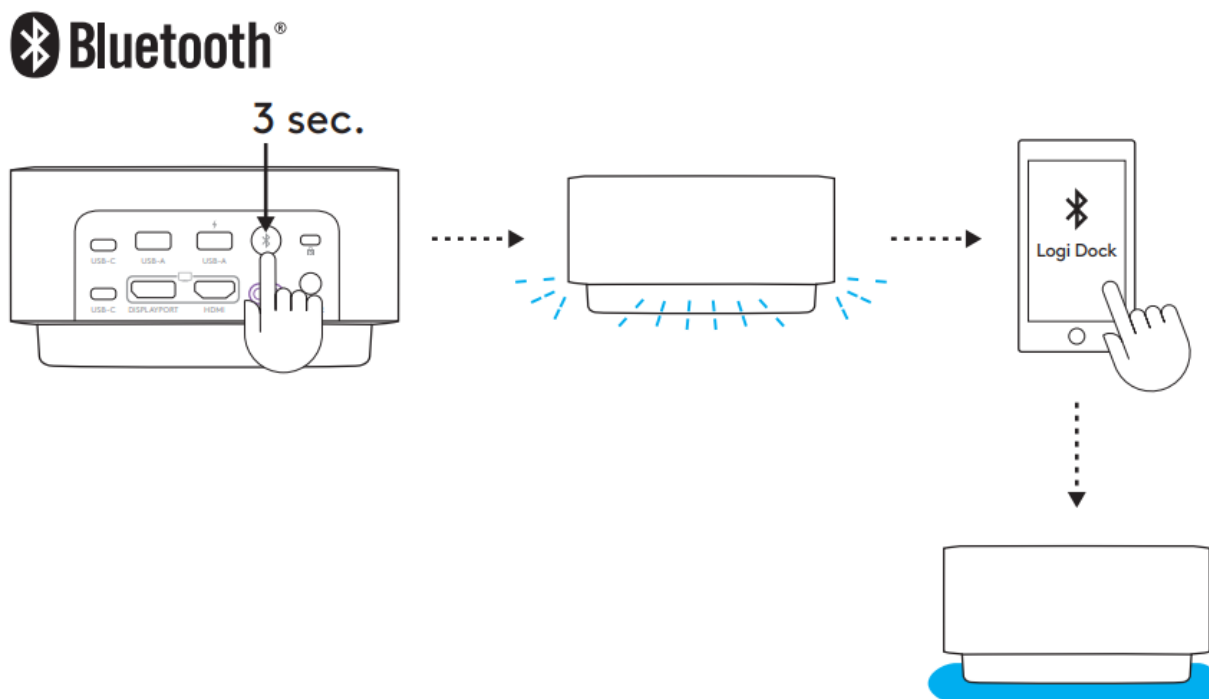

CONNECTING A DISPLAY PORT DEVICE

To connect your DisplayPort video device (such as monitor, projector) to Logi Dock, insert the DisplayPort cable* to DisplayPort on the back panel


* DisplayPort cable is not included

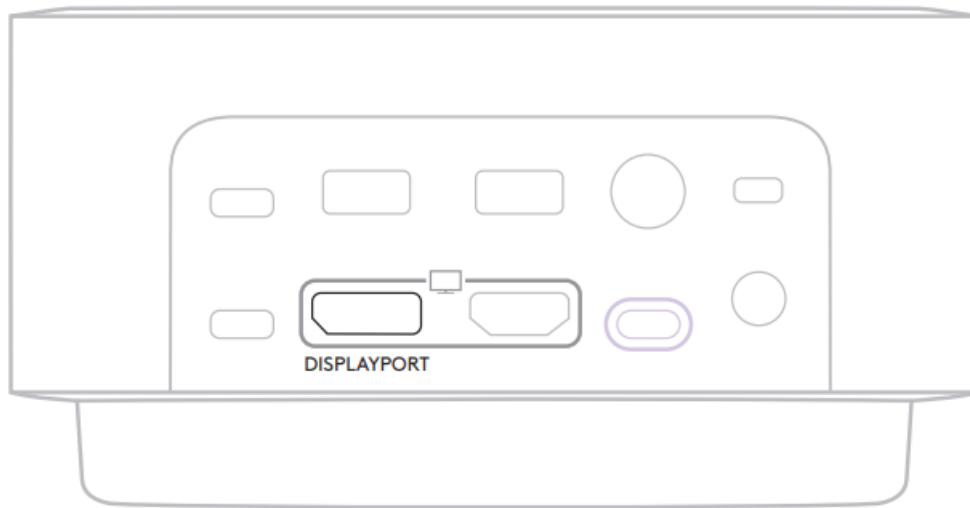

CONNECTING A HDMI DEVICE

To connect your HDMI video device (such as monitor, projector) to Logi Dock, insert the HDMI cable* to HDMI port on the back panel

* HDMI cable is not included

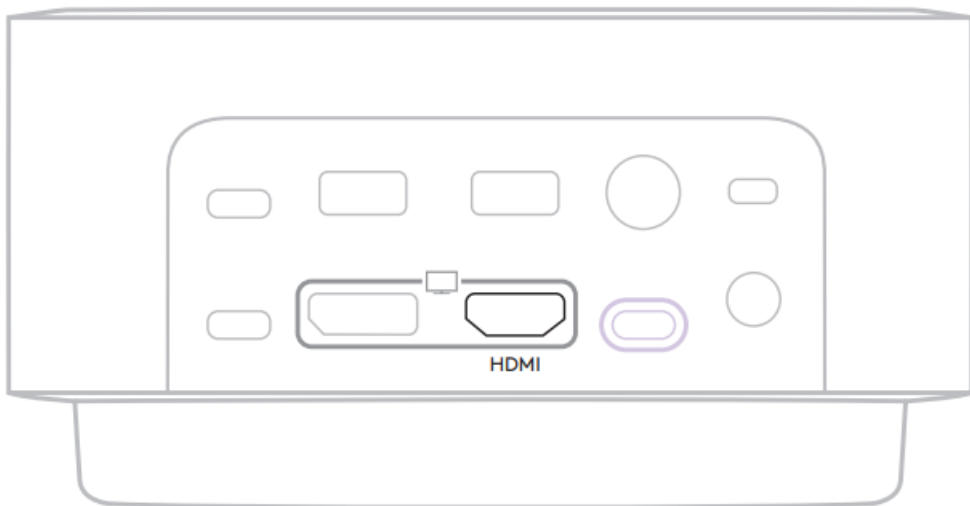


USING A KENSINGTON LOCK

To secure Logi Dock with a Kensington lock:

- Wrap one end of the security cable around secured object
- Insert the key into the cable lock
- Insert the cable lock into the Kensington security slot at the back panel Turn and remove the key

* Kensington lock and keys are not included

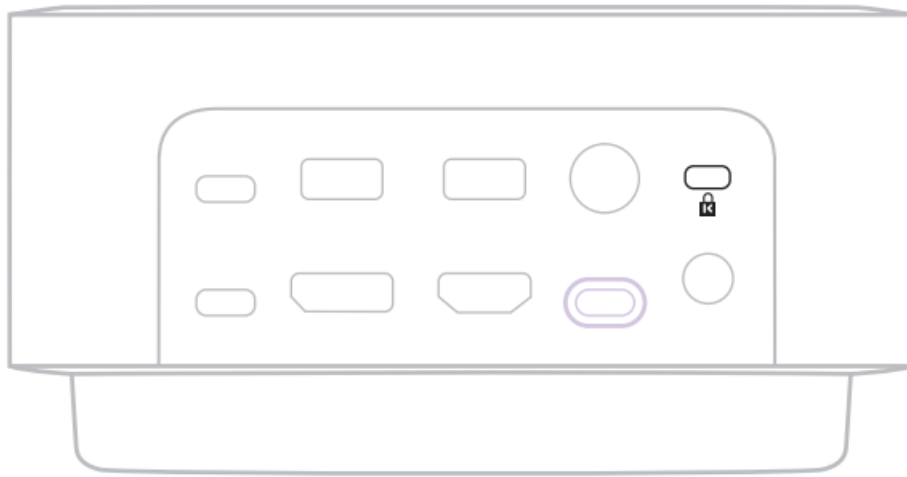

DIMENSIONS

Height x Width x Depth: 84.8 mm x 160.0 mm x 131.5 mm

Weight: 0.942 kg

SYSTEM REQUIREMENTS

Works with common calling applications across almost all platforms and operating systems

Works with Windows, macOS, or Chrome based computer via USB-C with Alt Mode and iOS or Android based mobile devices via Bluetooth®

TECHNICAL SPECIFICATIONS

Microphone type: Six beamforming mics with advanced algorithms

Frequency response (Speaker): 60 Hz – 20 kHz

Frequency response (Microphone): 65 Hz – 8 kHz

Wireless range: Up to 30 m / 100 ft (open field line of sight)

Wireless range may vary depending on operating environment and setup

Power to system: Up to 100 watt charging

Cable length (USB-C to C cable): 3.3 ft (1 m)

Cable length (AC power cord): 5.6 ft (1.7 m)


Cable length (Powers supply): 5.2 ft (1.6 m)

© 2022 Logitech. Logitech, Logi and their logos are trademarks or registered trademarks of Logitech Europe S.A. and/or its affiliates in the U.S. and other countries. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Logitech is under license. Windows, macOS, iOS, Chrome, Android, USB-C and all other 3rd party trademarks are the property of their respective owners.

logitech

www.logitech.com/support/logidock

Documents / Resources

 <p>LOGI DOCK Logitech Dock Logitech</p>	<p>logitech Logi Dock All-In-One Docking Station [pdf] Installation Guide</p> <p>Logi Dock All-In-One Docking Station, Logi Dock, All-In-One Docking Station, One Docking Station, Docking Station, Station</p>
---	---

References

- [logi Logitech Support + Download](#)
- [logi Logi Tune - Software App for Webcams, Headsets & Logi Dock](#)