

MANUFACTURER’S LIMITED ONE YEAR WARRANTY

PYLE USA. warranties this unit to be free from defective material or workmanship and will repair or replace this unit or any parts belonging to this unit. Only if proven that after normal use it was defective within one (1) year from the date of original purchase. The item, when sent in for service should be accompanied by proof of purchase. Our obligation under this warranty is limited to the repairing or replacing at our discretion, the defective instrument or any part there of when it is returned, transportation must be prepaid to the Pyle Service Center at the address below. The return shipping fees are as follows if the entire enclosure is sent in there will be \$25.00 for return shipping, however we should return suggest you would return only the defective speakers if that \$15.00. Be advised we are not responsible for cosmetic damage of the unit. This warranty will be considered void, if the unit has been tampered in a commercial vehicle. This warranty does not cover accidental damage. All payment accompanying defective units should be by US money order, or any other payment option must be authorized by our service center.

send your unit to:  
PYLE SERVICE CENTER  
1600-63rd Street  
BROOKLYN, New York 11204 USA  
1-718-236-8000  
1-800-444-5671  
www.PyleUSA.com

IMPORTANT: Pack carefully in original carton if possible. We are not responsible for damage incurred in returning items for repair, A letter stating your exact street address, daytime phone number and a brief statement describing the problem you are experiencing to ensure proper repair of the unit in question.



For user guides in multiple languages,  
**SCAN THE QR CODE**  
and enter your model number  
  
User Manuals available in  
Italian | German | Polish | Turkish | Dutch



Questions or Comments?  
We are here to help!  
Phone: 1.718.535.1800  
PyleUSA.com/ContactUs

**California Prop 65 Warning**  
**⚠ WARNING:**  
This product can expose you to chemicals, which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.  
For more info go to: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)



SPECIFICATIONS

PSBW12

PSBW15



PSBW18



PADH1569



PADH212



PADH215

PADH1289

PADH1589

PADH1889




# About Pyle PSBW/PADH Stage Speaker System

### Congratulations:


You have just purchased one of our high quality Pyle PSBW/ PADH Stage Speaker System. PSBW/PADH Stage Speaker System is carefully Designed & manufactured for vehicke use. They could deliver consistent and high performance.

### The General Features of Pyle PSBW/PADH Stage Speaker System


Heavy Duty Construction w/ Reinforced Corners  
High Power 8 Ohm Subwoofer  
Coating Paper cone with Cloth Edge  
Quick Connect Speaker Terminals  
Two 1/4" Phone Jack  
Built In Crossover Network

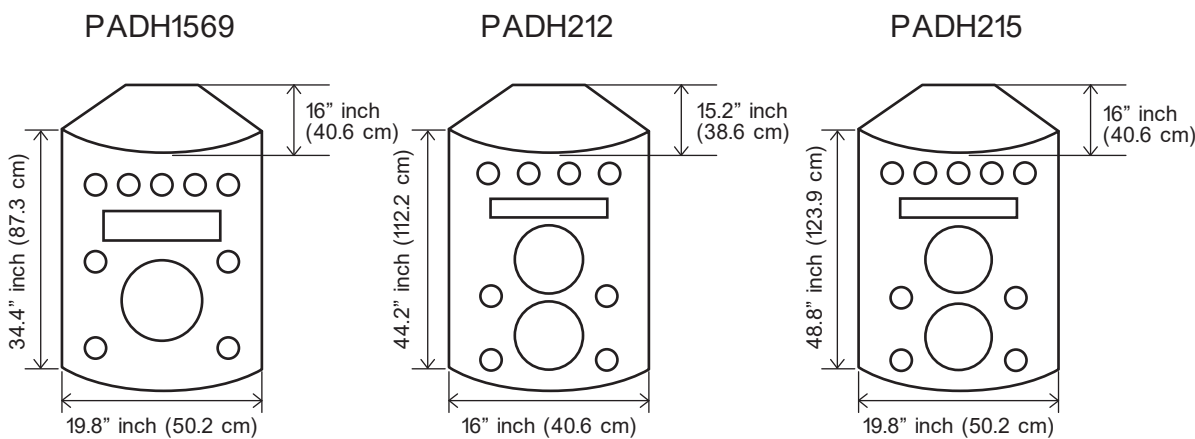

| Specification      | PADH1569                                           | PADH212                                             | PADH215                                             |
|--------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| Enclosure Type     | 3-Way Bass Reflex                                  | 3-Way Bass Reflex                                   | 3-Way Bass Reflex                                   |
| Woofer Size        | 1 x 15" inch (38.1 cm)                             | 2 x 12" in (30.4 cm)                                | 2 x 15" inch (38.1 cm)                              |
| Midrange Size      | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dome        | 5" inch (12.7 cm) x 12" inch (30.4 cm) Dome         | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dome         |
| Tweeter Size       | 5 x 3.4" inch (8.6 cm) Piezo                       | 4 x 3.4" inch (8.6 cm) Piezo                        | 5 x 3.4" inch (8.6 cm) Piezo                        |
| Sensitivity        | 107dB                                              | 98dB                                                | 107dB                                               |
| Frequency Responce | 35-20 KHz                                          | 50-20 KHz                                           | 35-20 KHz                                           |
| Max Power          | 1000 Watts                                         | 1600 Watts                                          | 2000 Watts                                          |
| Impedance          | 8 Ohm                                              | 8 Ohm                                               | 8 Ohm                                               |
| Crossover Network  | Included                                           | Included                                            | Included                                            |
| Dimension (HxWxD)  | 34.4" x 19.8" x 16" -inch (87.3 x 50.2 x 40.6 -cm) | 44.2" x 16" x 15.2" -inch (112.2 x 40.6 x 38.6 -cm) | 48.8" x 19.8" x 16" -inch (123.9 x 50.2 x 40.6 -cm) |

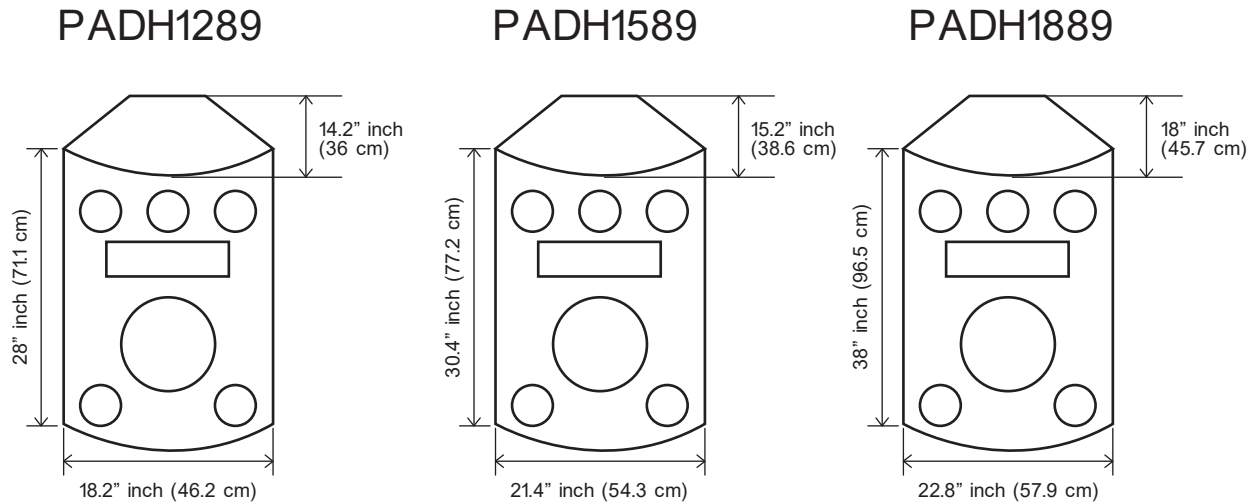

| Specification      | PADH1289                                         | PADH1589                                             | PADH1889                                         |
|--------------------|--------------------------------------------------|------------------------------------------------------|--------------------------------------------------|
| Enclosure Type     | 3-Way Bass Reflex                                | 3-Way Bass Reflex                                    | 3-Way Bass Reflex                                |
| Woofer Size        | 1 x 12" inch (30.4 cm)                           | 1 x 15" inch (38.1 cm)                               | 1 x 18" inch (45.7 cm)                           |
| Midrange Size      | 5" inch (12.7 cm) x 12" inch (30.4 cm) Dome      | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dome          | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dome      |
| Tweeter Size       | 3 x 3.4" inch (8.6 cm) Piezo                     | 4 x 3.4" inch (8.6 cm) Piezo                         | 5 x 3.4" inch (8.6 cm) Piezo                     |
| Sensitivity        | 98dB                                             | 107dB                                                | 107dB                                            |
| Frequency Responce | 50-20 KHz                                        | 35-20 KHz                                            | 20-20 KHz                                        |
| Max Power          | 600 Watts                                        | 800 Watts                                            | 1000 Watts                                       |
| Impedance          | 8 Ohm                                            | 8 Ohm                                                | 8 Ohm                                            |
| Crossover Network  | Included                                         | Included                                             | Included                                         |
| Dimension (HxWxD)  | 28" x 18.2" x 14.2" -inch (71.1 x 46.2 x 36 -cm) | 30.4" x 21.4" x 15.2" -inch (77.2 x 54.3 x 38.6 -cm) | 38" x 22.8" x 18" -inch (96.5 x 57.9 x 45.7 -cm) |

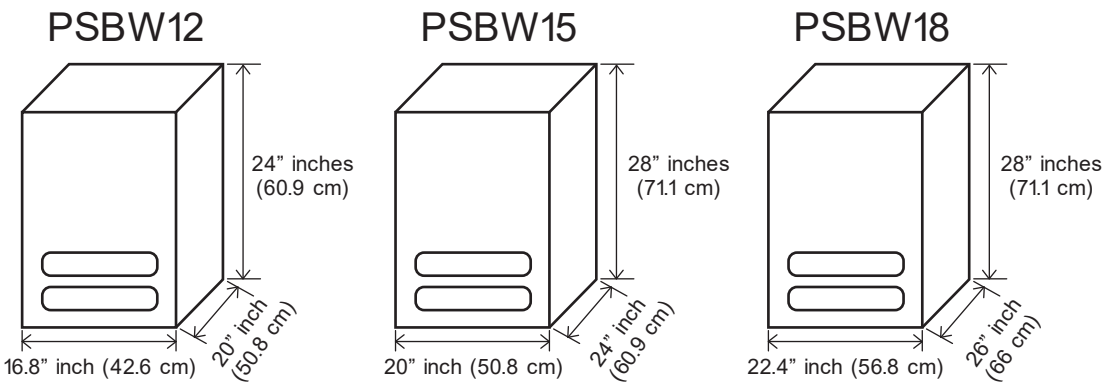

| Specification      | PSBW12                                           | PSBW15                                         | PSBW18                                         |
|--------------------|--------------------------------------------------|------------------------------------------------|------------------------------------------------|
| Woofer Size        | 1 x 12" inch (30.4 cm)                           | 1 x 15" inch (38.1 cm)                         | 1 x 18" inch (45.7 cm)                         |
| Sensitivity        | 100dB                                            | 102dB                                          | 103dB                                          |
| Frequency Responce | 30-800Hz                                         | 25-500Hz                                       | 20-300Hz                                       |
| Max Power          | 600 Watts                                        | 800 Watts                                      | 1000 Watts                                     |
| Impedance          | 8 Ohm                                            | 8 Ohm                                          | 8 Ohm                                          |
| Crossover Network  | Included                                         | Included                                       | Included                                       |
| Dimension (HxWxD)  | 24" x 16.8" x 20" -inch (60.9 x 42.6 x 50.8 -cm) | 28" x 20" x 24" -inch (71.1 x 50.8 x 60.9 -cm) | 28" x 22.4" x 26" -inch (71.1 x 56.8 x 66 -cm) |

## MANUFACTURER'S LIMITED ONE YEAR WARRANTY

PYLE USA. warranties this unit to be free from defective material or workmanship and will repair or replace this unit or any parts belonging to this unit. Only if proven that after normal use it was defective within one (1) year from the date of original purchase. The item, when sent in for service should be accompanied by proof of purchase. Our obligation under this warranty is limited to the repairing or replacing at our discretion, the defective instrument or any part there of when it is returned, transportation must be prepaid to the Pyle Service Center at the address below. The return shipping fees are as follows if the entire enclosure is sent in there will be \$25.00 for return shipping, however we should return suggest you would return only the defective speakers if that \$15.00. Be advised we are not responsible for cosmetic damage of the unit. This warranty will be considered void, if the unit has been tampered in a commercial vehicle. This warranty does not cover accidental damage. All payment accompanying defective units should be by US money order, or any other payment option must be authorized by our service center.

send your unit to:  
PYLE SERVICE CENTER  
1600-63rd Street  
BROOKLYN, New York 11204 USA  
1-718-236-8000  
1-800-444-5671  
[www.PyleUSA.com](http://www.PyleUSA.com)

**California Prop 65 Warning**  
**WARNING:**  
This product can expose you to chemicals, which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.  
For more info go to: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

IMPORTANT: Pack carefully in original carton if possible. We are not responsible for damage incurred in returning items for repair, A letter stating your exact street address, daytime phone number and a brief statement describing the problem you are experiencing to ensure proper repair of the unit in question.



For user guides in multiple languages,  
**SCAN THE QR CODE**  
and enter your model number  
User Manuals available in  
Italian | German | Polish | Turkish | Dutch



Preguntas o comentarios?  
¡Estamos aquí para ayudar!  
Phone: 1.718.535.1800  
[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)



SPA **PYLE**<sup>®</sup>  
[PyleUSA.com](http://PyleUSA.com)

## ESPECIFICACIONES

**PSBW12**

**PSBW15**

**PSBW18**



**PADH1569**



**PADH212**



**PADH215**

**PADH1289**

**PADH1589**

**PADH1889**






Acerca de los sistemas de altavoces Pyle PADH/PAHT ESCENARIO

Felicitaciones

Acaba de adquirir uno de nuestros altavoces Pyle PADH/PAHT de alta calidad. El sistema de altavoces Pyle PADH/PAHT ESCENARIO ha sido cuidadosamente diseñado y fabricado para su uso en el ESCENARIO. Pueden ofrecer un rendimiento alto y constante.


Características generales de los sistemas de altavoces Pyle PADH/PAHT ESCENARIO

Construcción resistente con esquinas reforzadas  
Subwoofer de 8 Ohm de alta potencia  
Cono de papel revestido con borde de tela  
Terminales de altavoz de conexión rápida  
Dos tomas telefónicas de 1/4  
Red de cruce incorporada

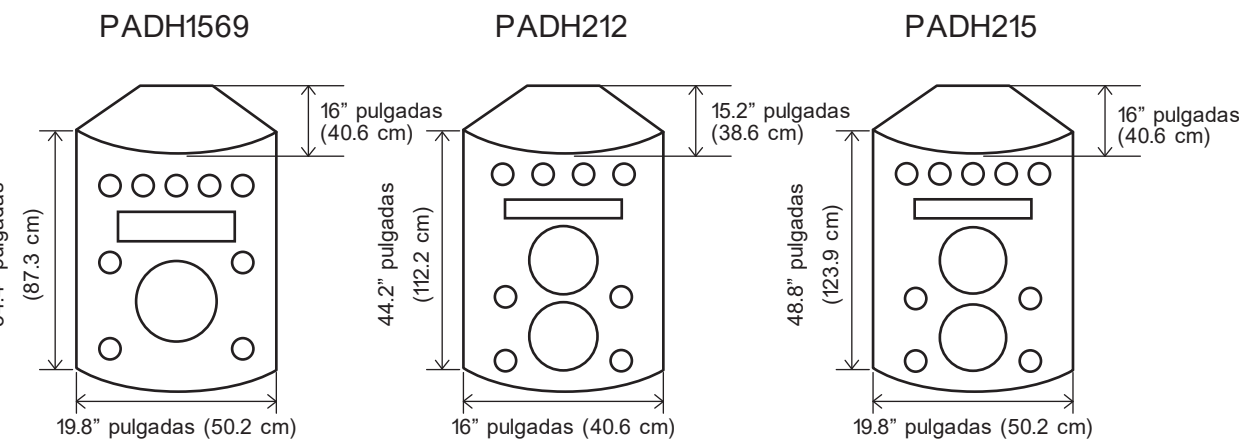


| Especificaciones                 | PADH1569                                           | PADH212                                             | PADH215                                             |
|----------------------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| Tipo de cubierta                 | Reflejo de graves de 3 vías                        | Reflejo de graves de 3 vías                         | Reflejo de graves de 3 vías                         |
| Tamaño del altavoz               | 1 x 15" plg. (38.1 cm)                             | 2 x 12" plg. (30.4 cm)                              | 2 x 15" plg. (38.1 cm)                              |
| Tamaño mediano                   | 6" plg. (15.2 cm) x 17" plg. (43.1 cm) Domo        | 5" plg. (12.7 cm) x 12" plg. (30.4 cm) Domo         | 6" plg. (15.2 cm) x 17" plg. (43.1 cm) Domo         |
| Tamaño bocina de alta frecuencia | 5 x 3.4" plg. (8.6 cm) Pieza                       | 4 x 3.4" plg. (8.6 cm) Pieza                        | 5 x 3.4" plg. (8.6 cm) Pieza                        |
| Sensibilidad                     | 107dB                                              | 98dB                                                | 107dB                                               |
| Frecuencia de respuesta          | 35-20 KHz                                          | 50-20 KHz                                           | 35-20 KHz                                           |
| Potencia Máxima                  | 1000 vatios                                        | 1600 vatios                                         | 2000 vatios                                         |
| Impedancia                       | 8 Ohm                                              | 8 Ohm                                               | 8 Ohm                                               |
| Red de cruce                     | Incluido                                           | Incluido                                            | Incluido                                            |
| Dimensiones (A x A x P)          | 34.4" x 19.8" x 16" -plg. (87.3 x 50.2 x 40.6 -cm) | 44.2" x 16" x 15.2" -plg. (112.2 x 40.6 x 38.6 -cm) | 48.8" x 19.8" x 16" -plg. (123.9 x 50.2 x 40.6 -cm) |


PADH1289

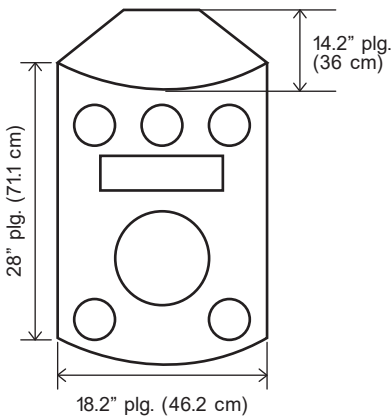

PADH1589

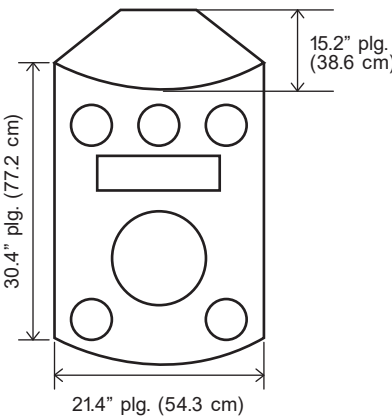


PADH1889

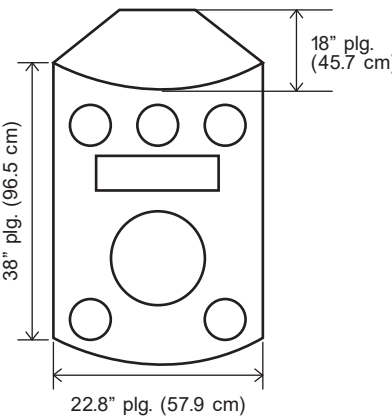


| Especificaciones                 | PADH1289                                         | PADH1589                                             | PADH1889                                         |
|----------------------------------|--------------------------------------------------|------------------------------------------------------|--------------------------------------------------|
| Tipo de cubierta                 | Reflejo de graves de 3 vías                      | Reflejo de graves de 3 vías                          | Reflejo de graves de 3 vías                      |
| Tamaño del altavoz               | 1 x 12" plg. (30.4 cm)                           | 1 x 15" plg. (38.1 cm)                               | 1 x 18" plg. (45.7 cm)                           |
| Tamaño mediano                   | 5" plg. (12.7 cm) x 12" plg. (30.4 cm) Domo      | 6" plg. (15.2 cm) x 17" inch (43.1 cm) Domo          | 6" plg. (15.2 cm) x 17" plg. (43.1 cm) Domo      |
| Tamaño bocina de alta frecuencia | 3 x 3.4" plg. (8.6 cm) Pieza                     | 4 x 3.4" plg. (8.6 cm) Pieza                         | 5 x 3.4" plg. (8.6 cm) Pieza                     |
| Sensibilidad                     | 98dB                                             | 107dB                                                | 107dB                                            |
| Frecuencia de respuesta          | 50-20 KHz                                        | 35-20 KHz                                            | 20-20 KHz                                        |
| Potencia Máxima                  | 600 vatios                                       | 800 vatios                                           | 1000 vatios                                      |
| Impedancia                       | 8 Ohm                                            | 8 Ohm                                                | 8 Ohm                                            |
| Red de cruce                     | Incluido                                         | Incluido                                             | Incluido                                         |
| Dimensiones (A x A x P)          | 28" x 18.2" x 14.2" -plg. (71.1 x 46.2 x 36 -cm) | 30.4" x 21.4" x 15.2" -plg. (77.2 x 54.3 x 38.6 -cm) | 38" x 22.8" x 18" -plg. (96.5 x 57.9 x 45.7 -cm) |


PSBW12

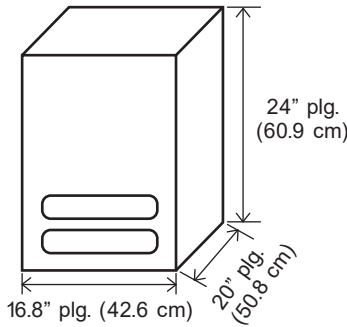

PSBW15

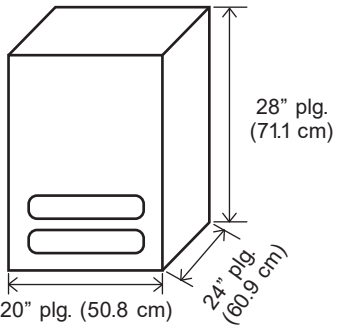

PSBW18

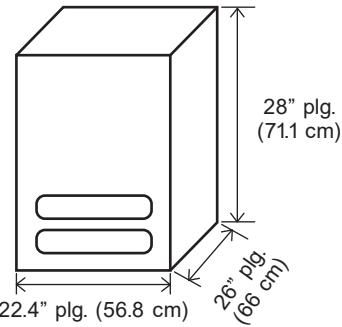

| Especificaciones        | PSBW12                                           | PSBW15                                         | PSBW18                                         |
|-------------------------|--------------------------------------------------|------------------------------------------------|------------------------------------------------|
| Tamaño del altavoz      | 1 x 12" plg. (30.4 cm)                           | 1 x 15" plg. (38.1 cm)                         | 1 x 18" plg. (45.7 cm)                         |
| Sensibilidad            | 100dB                                            | 102dB                                          | 103dB                                          |
| Frecuencia de respuesta | 30-800Hz                                         | 25-500Hz                                       | 20-300Hz                                       |
| Potencia Máxima         | 600 vatios                                       | 800 vatios                                     | 1000 vatios                                    |
| Impedancia              | 8 Ohm                                            | 8 Ohm                                          | 8 Ohm                                          |
| Red de cruce            | Incluido                                         | Incluido                                       | Incluido                                       |
| Dimensiones (A x A x P) | 24" x 16.8" x 20" -plg. (60.9 x 42.6 x 50.8 -cm) | 28" x 20" x 24" -plg. (71.1 x 50.8 x 60.9 -cm) | 28" x 22.4" x 26" -plg. (71.1 x 56.8 x 66 -cm) |

## GARANTIE LIMITÉE D'UN AN DU FABRICANT

PYLE USA. garantit que cet appareil est exempt de tout défaut de matériau ou de fabrication et s'engage à réparer ou à remplacer cet appareil ou toute pièce appartenant à cet appareil uniquement s'il est prouvé qu'après une utilisation normale, il était défectueux dans un délai d'un (1) an à compter de la date d'achat d'origine. L'article, lorsqu'il est envoyé pour réparation, doit être accompagné d'une preuve d'achat. Notre obligation au titre de cette garantie est limitée à la réparation ou au remplacement de l'appareil. Le transport doit être prépayé au centre de service Pyle à l'adresse ci-dessous. Les frais d'expédition pour le retour sont les suivants si l'enceinte entière est envoyée, il y aura 25,00 \$ de frais d'expédition pour le retour, cependant nous devons renvoyer l'appareil au centre de service Pyle à l'adresse ci-dessous.

Cette garantie sera considérée comme nulle si l'appareil a été manipulé dans un véhicule commercial. Cette garantie ne couvre pas les dommages accidentels. Tout paiement accompagnant les appareils défectueux doit être effectué par mandat postal américain, ou toute autre option de paiement doit être autorisée par notre centre de service.

envoyez votre appareil à:

PYLE SERVICE CENTER

1600-63rd Street

BROOKLYN, New York 11204 USA

1-718-236-8000

1-800-444-5671

www.PyleUSA.com

**Avertissement Californie Prop 65**  
**⚠️ AVERTISSEMENT :**  
Ce produit peut vous exposer à des produits chimiques dont l'État de Californie sait qu'ils peuvent provoquer des cancers, des malformations congénitales et d'autres troubles de la reproduction. Ne pas ingérer. Pour plus d'informations, voir: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

**IMPORTANT :** Emballer soigneusement le produit dans son carton d'origine si possible. Nous ne sommes pas responsables des dommages subis lors du retour des articles pour réparation. Une lettre indiquant votre adresse exacte, votre numéro de téléphone dans la journée et une brève description du problème que vous rencontrez afin d'assurer une réparation correcte de l'unité en question.



For user guides in multiple languages,  
**SCAN THE QR CODE**  
and enter your model number

User Manuals available in  
Italian | German | Polish | Turkish | Dutch



**Questions ou commentaires?**  
Nous sommes ici pour aider!  
Phone: 1.718.535.1800  
[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)



 **PYLE**<sup>®</sup>  
FRE  
PyleUSA.com

## CARACTÉRISTIQUES

**PSBW12**

**PSBW15**

**PSBW18**



**PADH1569**



**PADH212**



**PADH215**

**PADH1289**

**PADH1589**

**PADH1889**




A propos du système d'enceintes de scène Pyle PSBW/PADH

Congratulations:


Vous venez d'acheter l'un de nos systèmes d'enceintes de scène Pyle PSBW/PADH de haute qualité. Le système d'enceintes de scène PSBW/PADH est soigneusement conçu et fabriqué pour une utilisation dans les véhicules. Ils sont capables de fournir des performances constantes et élevées.

Caractéristiques générales du système de haut-parleurs de scène Pyle PSBW/PADH


Construction robuste avec coins renforcés Cône en papier avec bord en tissu Bornes d'enceinte à connexion rapide Deux ports téléphoniques de 1/4 po Réseau de crossover intégré

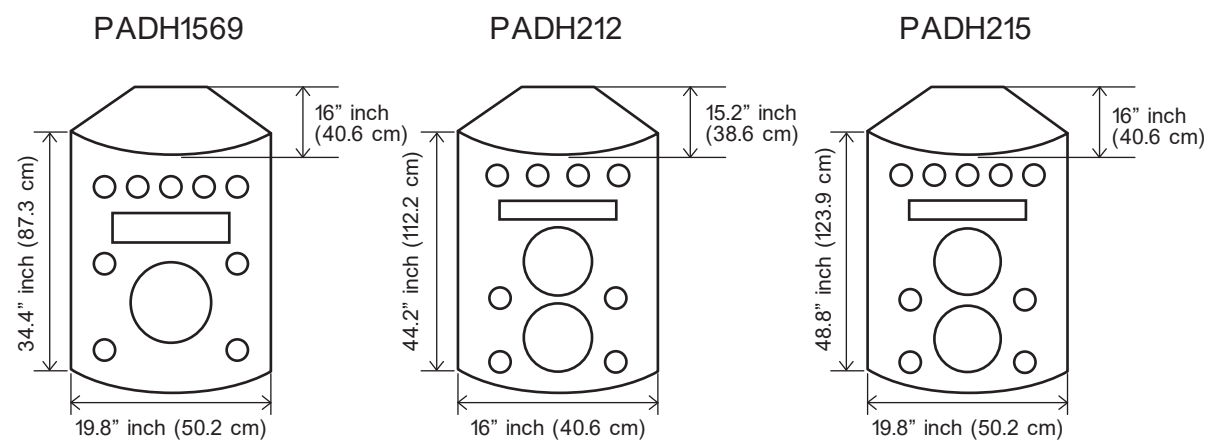

| Spécification        | PADH1569                                           | PADH212                                             | PADH215                                             |
|----------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| Type d'enceinte      | Bass Reflex à 3 voies                              | Bass Reflex à 3 voies                               | Bass Reflex à 3 voies                               |
| Taille du woofer     | 1 x 15" inch (38.1 cm)                             | 2 x 12" in (30.4 cm)                                | 2 x 15" inch (38.1 cm)                              |
| Taille moyenne       | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dôme        | 5" inch (12.7 cm) x 12" inch (30.4 cm) Dôme         | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dôme         |
| Taille des aigus     | 5 x 3.4" inch (8.6 cm) Piezo                       | 4 x 3.4" inch (8.6 cm) Piezo                        | 5 x 3.4" inch (8.6 cm) Piezo                        |
| Sensibilité          | 107dB                                              | 98dB                                                | 107dB                                               |
| Réponse en fréquence | 35-20 KHz                                          | 50-20 KHz                                           | 35-20 KHz                                           |
| Puissance maximale   | 1000 Watts                                         | 1600 Watts                                          | 2000 Watts                                          |
| Impédance            | 8 Ohm                                              | 8 Ohm                                               | 8 Ohm                                               |
| Réseau de crossover  | Inclus                                             | Inclus                                              | Inclus                                              |
| Dimensions (H*L*P)   | 34.4" x 19.8" x 16" -inch (87.3 x 50.2 x 40.6 -cm) | 44.2" x 16" x 15.2" -inch (112.2 x 40.6 x 38.6 -cm) | 48.8" x 19.8" x 16" -inch (123.9 x 50.2 x 40.6 -cm) |

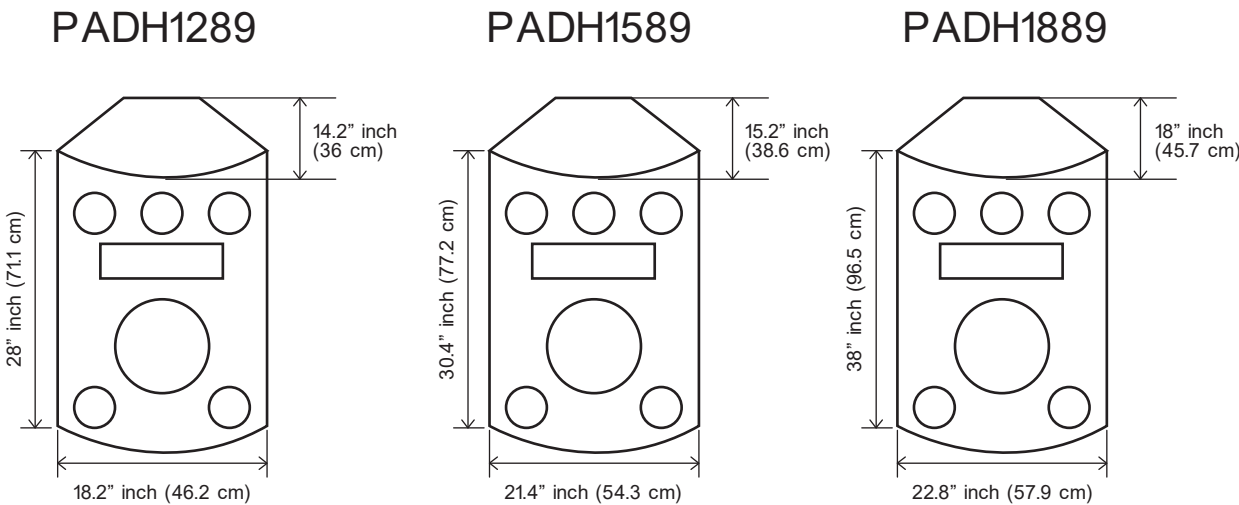

| Spécification        | PADH1289                                         | PADH1589                                             | PADH1889                                         |
|----------------------|--------------------------------------------------|------------------------------------------------------|--------------------------------------------------|
| Type d'enceinte      | Bass Reflex à 3 voies                            | Bass Reflex à 3 voies                                | Bass Reflex à 3 voies                            |
| Taille du woofer     | 1 x 12" inch (30.4 cm)                           | 1 x 15" inch (38.1 cm)                               | 1 x 18" inch (45.7 cm)                           |
| Taille moyenne       | 5" inch (12.7 cm) x 12" inch (30.4 cm) Dôme      | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dôme          | 6" inch (15.2 cm) x 17" inch (43.1 cm) Dôme      |
| Taille des aigus     | 3 x 3.4" inch (8.6 cm) Piezo                     | 4 x 3.4" inch (8.6 cm) Piezo                         | 5 x 3.4" inch (8.6 cm) Piezo                     |
| Sensibilité          | 98dB                                             | 107dB                                                | 107dB                                            |
| Réponse en fréquence | 50-20 KHz                                        | 35-20 KHz                                            | 20-20 KHz                                        |
| Puissance maximale   | 600 Watts                                        | 800 Watts                                            | 1000 Watts                                       |
| Impédance            | 8 Ohm                                            | 8 Ohm                                                | 8 Ohm                                            |
| Réseau de crossover  | Inclus                                           | Inclus                                               | Inclus                                           |
| Dimensions (H*L*P)   | 28" x 18.2" x 14.2" -inch (71.1 x 46.2 x 36 -cm) | 30.4" x 21.4" x 15.2" -inch (77.2 x 54.3 x 38.6 -cm) | 38" x 22.8" x 18" -inch (96.5 x 57.9 x 45.7 -cm) |

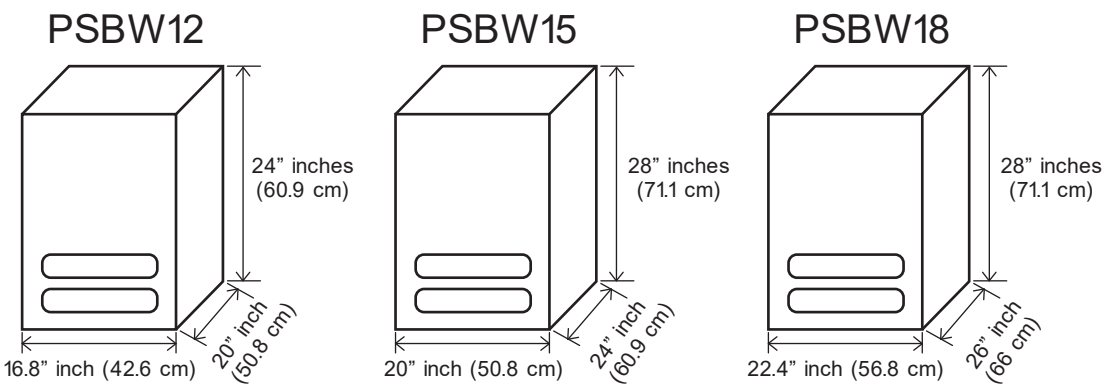

| Spécification        | PSBW12                                           | PSBW15                                         | PSBW18                                         |
|----------------------|--------------------------------------------------|------------------------------------------------|------------------------------------------------|
| Taille de l'enceinte | 1 x 12" inch (30.4 cm)                           | 1 x 15" inch (38.1 cm)                         | 1 x 18" inch (45.7 cm)                         |
| Sensibilité          | 100dB                                            | 102dB                                          | 103dB                                          |
| Réponse en fréquence | 30-800Hz                                         | 25-500Hz                                       | 20-300Hz                                       |
| Puissance maximale   | 600 Watts                                        | 800 Watts                                      | 1000 Watts                                     |
| Impédance            | 8 Ohm                                            | 8 Ohm                                          | 8 Ohm                                          |
| Réseau de crossover  | Inclus                                           | Inclus                                         | Inclus                                         |
| Dimensions (H*L*P)   | 24" x 16.8" x 20" -inch (60.9 x 42.6 x 50.8 -cm) | 28" x 20" x 24" -inch (71.1 x 50.8 x 60.9 -cm) | 28" x 22.4" x 26" -inch (71.1 x 56.8 x 66 -cm) |