



LUMASCAPE LS9032 Linealux L3 Foundation Instruction Manual

[Home](#) » [LUMASCAPE](#) » LUMASCAPE LS9032 Linealux L3 Foundation Instruction Manual 

LUMASCAPE LS9032 Linealux L3 Foundation Instruction Manual



Contents

- [1 Safety instructions](#)
- [2 Tools Required](#)
- [3 Included Components](#)
- [4 Symbols](#)
- [5 Assembly Instructions](#)
- [6 Wiring Designations](#)
- [7 Dimensions](#)
- [8 Luminaire Rotation](#)
- [9 Specification](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)


Safety instructions

Please read and follow all safety instructions EN carefully. Failure to do so will void warranty

WARNING – Product Warranty is void if product is not installed as per installation instructions and in compliance with all local and provincial codes.


- Ensure installation complies with local electrical rules and regulations.
- All electrical work must be performed by a licensed electrician.
- Protective earth; protective ground (symbol 7).
- All luminaires may become hot. Use discretion on where the luminaire is mounted. Take care when setting luminaire as it may become hot.
- Luminaire should only be used complete with protective shield. If protective shield is cracked, immediately stop using luminaire. Isolate light source, keep it dry and immediately contact Lumascope for replacement of protective shield (symbol 10).
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by Lumascope or their service agent in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by Lumascope or their service agent.
- Do not stare at the operating light source. The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 46' (14 m) is not expected (symbol 13)
- Basic insulation has been maintained between line voltage and the control conductors.
- To reduce the risk of strangulation, the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Ensure mains input power is surge protected.
- Never make or break connections while the circuit is energized.
- Do not make modifications or alter the product.
- Keep luminaire clean and free of debris.
- Only clean with warm water.
- Do not use chemicals or abrasives to clean luminaire as this may void the product warranty.
- Connections are to be kept clean and dry at all times.
- Suitable for use indoors or outdoors.

Tools Required

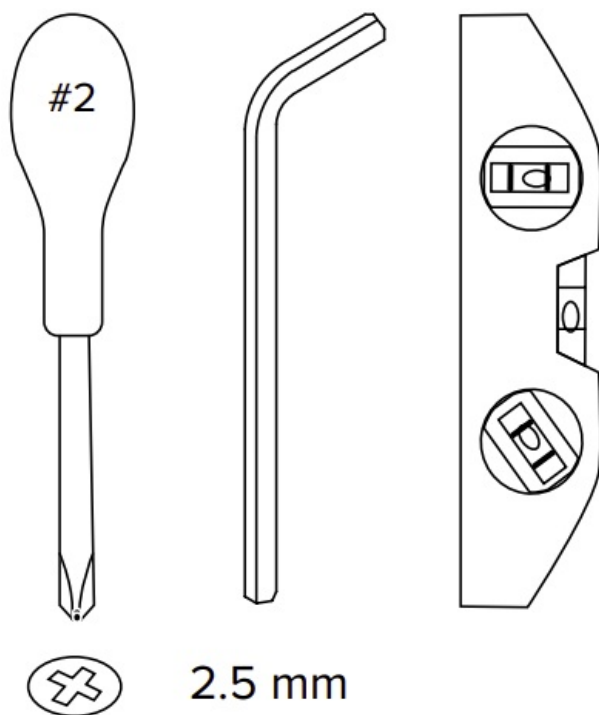


Included Components


- Instructions




- Luminaire



- Adjustable Bracket




- Fixed Bracket





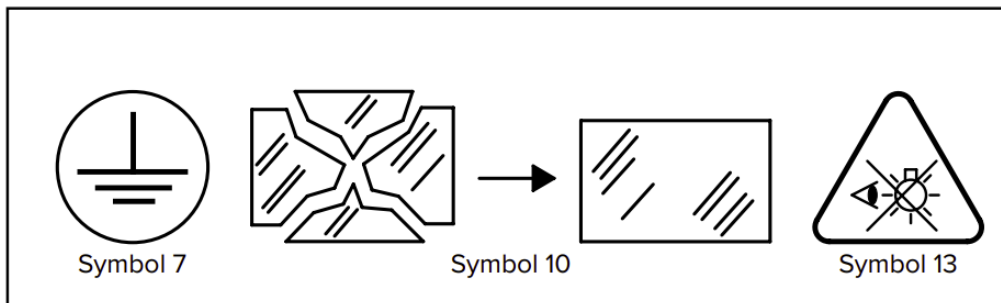

Symbols


Legend Key:



	<p>CAUTION Risk of Electric Shock</p>
	<p>Do Not Use Power Tools on Screws</p>
	<p>Keep Electronics Free From Dirt and Moisture</p>

	<p>Keep Away from Flammable Materials</p>
	<p>Do Not Hose or Pressure Clean</p>
	<p>Do Not Use Silicone On Outside Surface</p>
	<p>Do Not Cut Cable to the Luminaire</p>

Assembly Instructions

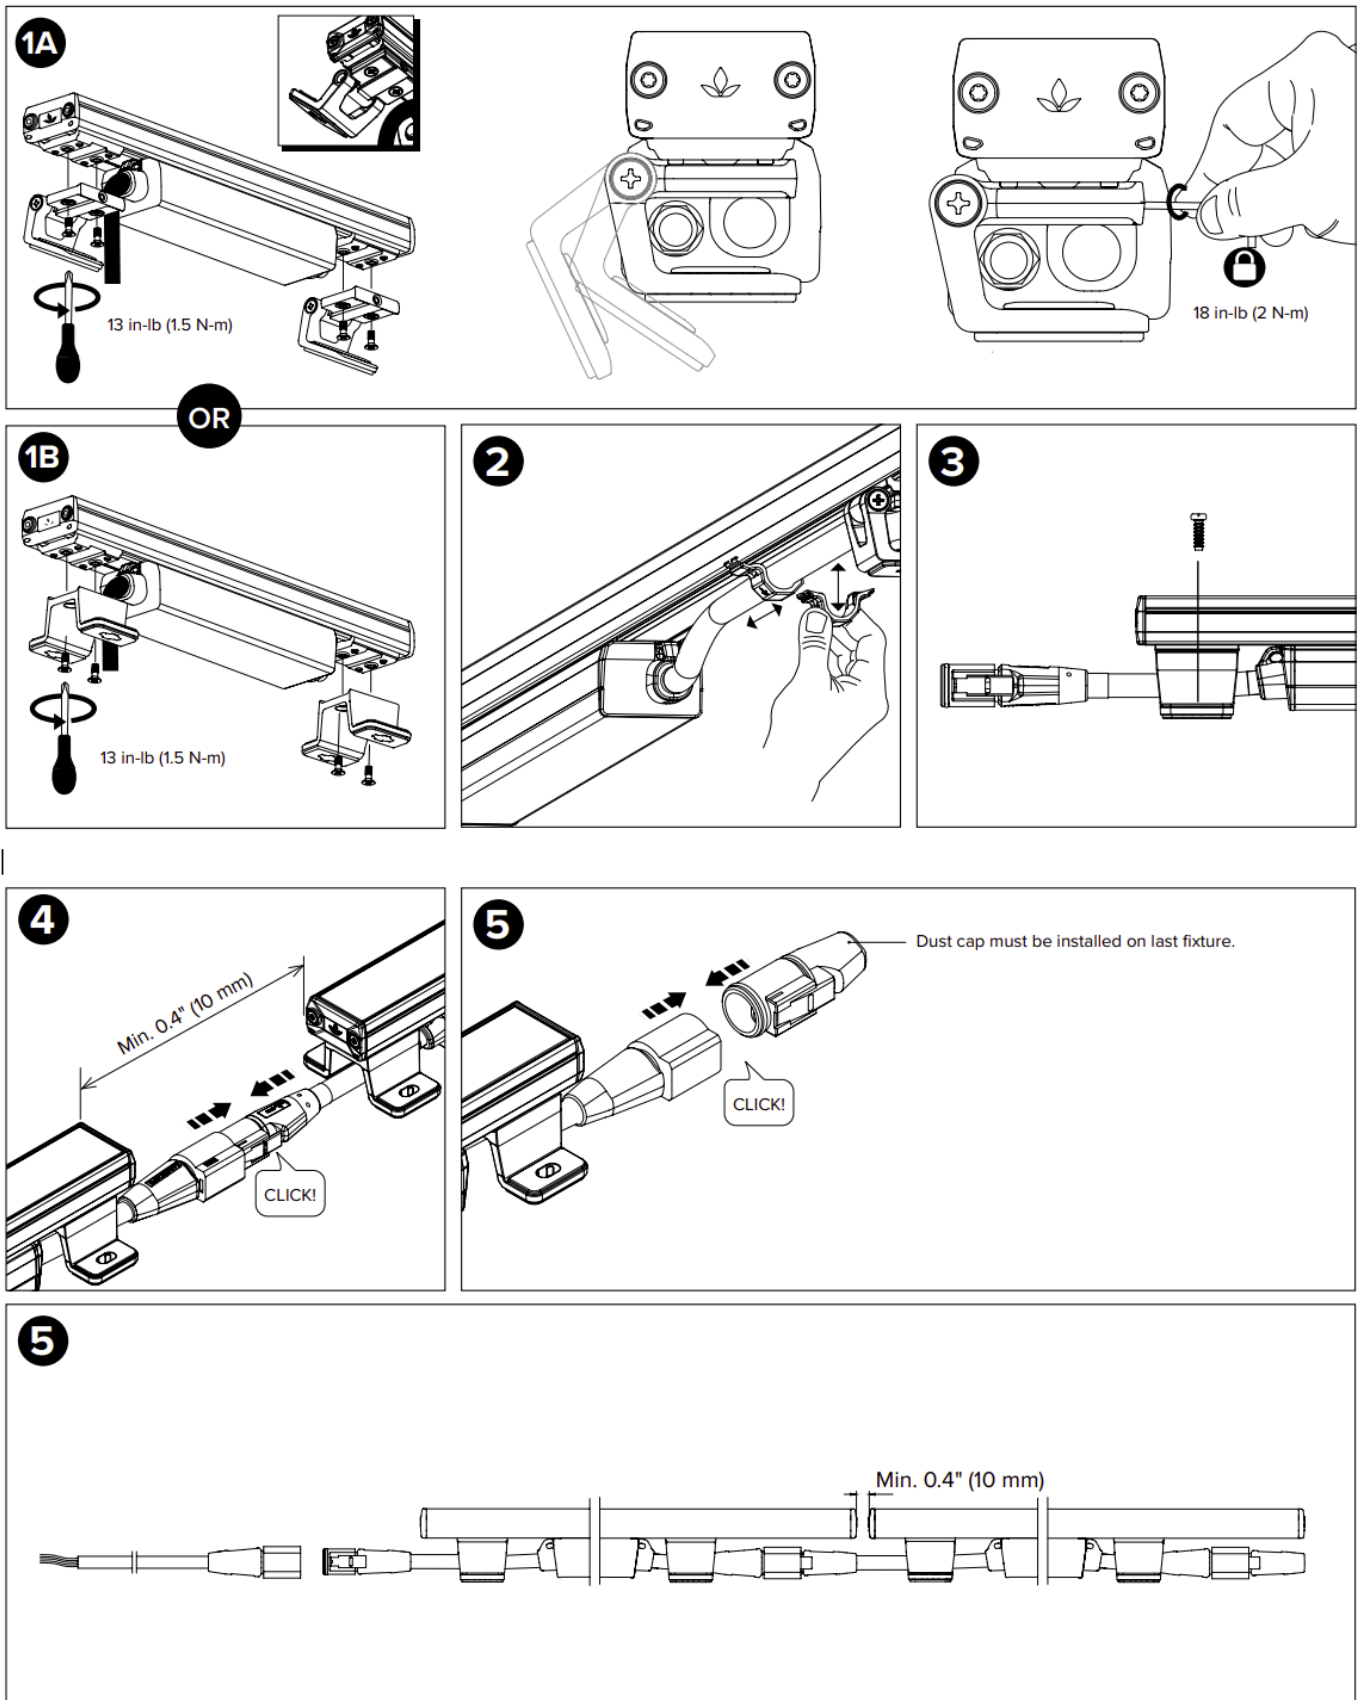

Wiring Designations

Non-Dimmable (4-Core) –International

Designation	Color
Active	Brown
Neutral	Blue
Earth	Green / Yellow
Not Used	Black
Do not Hi-Pot tes	

DALI (5-Core) – International

Designation	Color
Active	Brown
Neutral	Blue
Earth	Green / Yellow
DALI+	Grey
DALI –	Black
Do not Hi-Pot test	


Non-Dimmable (4-Core) – North America

Designation	Color
Active	Black
Neutral	White
Earth	Green / Yellow
Not Used	Grey or Red
Do not Hi-Pot test	



0-10 V (5-Core) – North America

Designation	Color
Active	Black
Neutral	White
Earth	Green / Yellow
0-10 V +	Purple
0-10 V –	Grey
Do not Hi-Pot test	



Dimensions

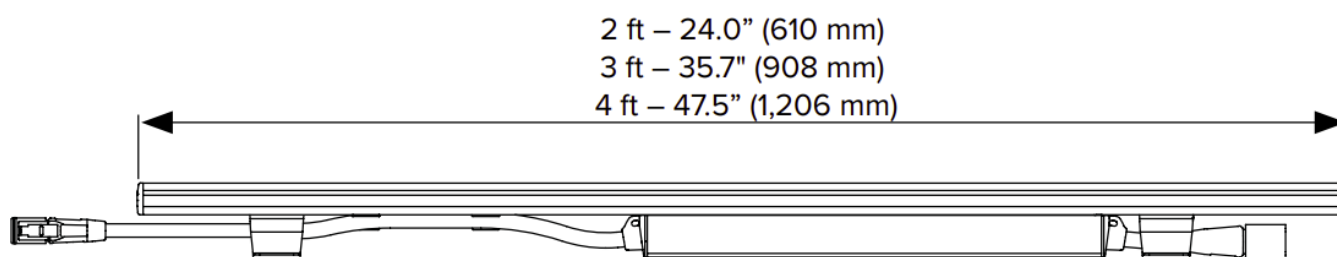



Fixed Bracket

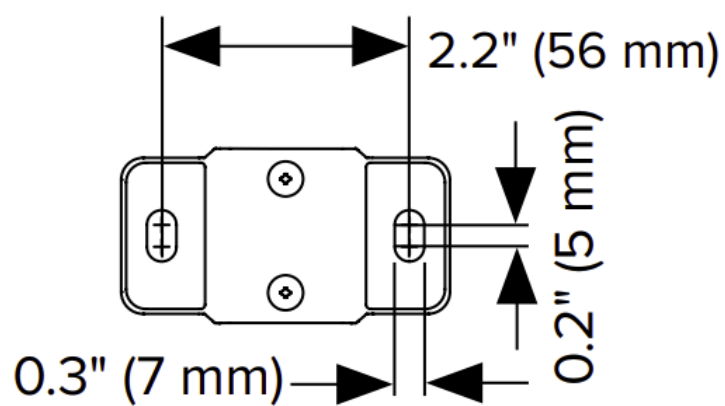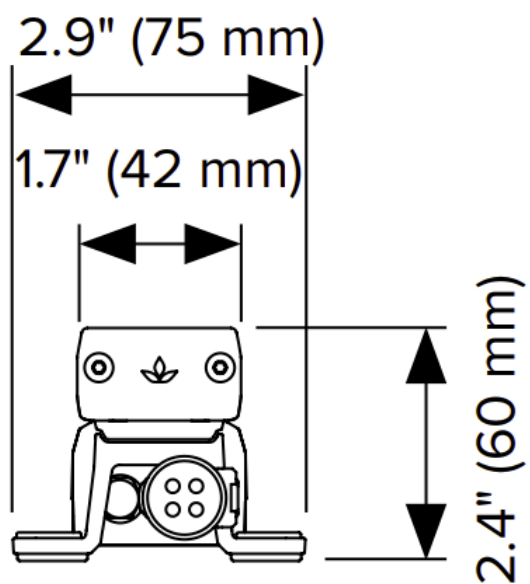

Adjustable Bracket

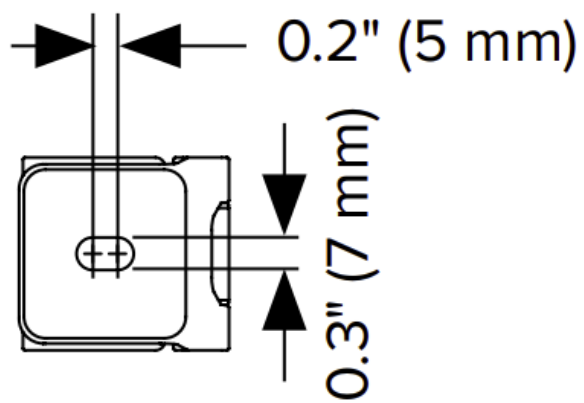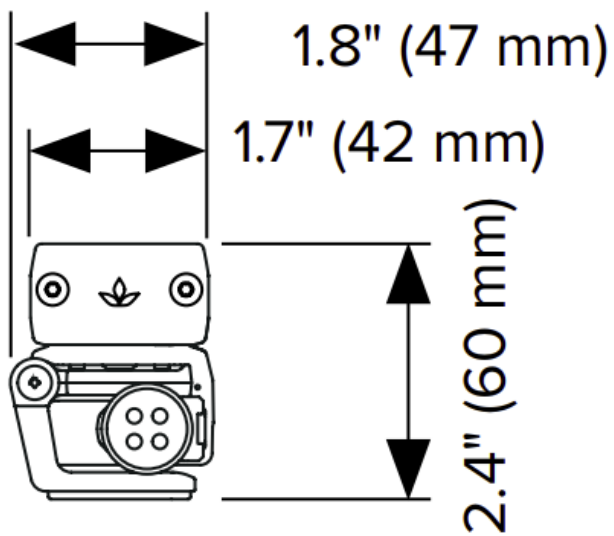

Luminaire Rotation

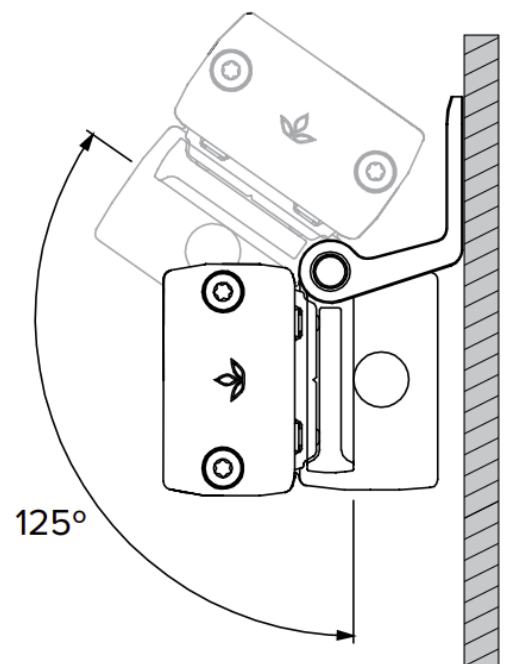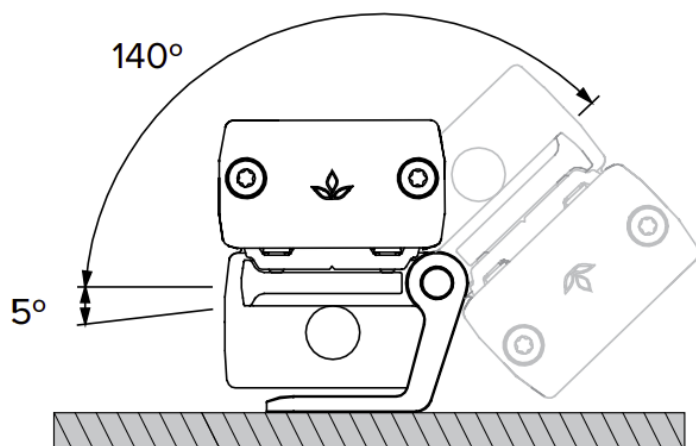

Specification

- **MODEL** LS9032

- **PART NUMBER** LS9032 – 12D xxx xx xx x x 01 xx xx xxx LS9032 – 12D xxx xx xx x x 09 xx xx xxx
- **INSTALLATION TYPE** LINEAR GRAZER
- **IP RATING** IP66/67 (Passes IP68 Test)
- **SUPPLY VOLTAGE** 220-240 ~Vac, 50 Hz 120/277 ~Vac, 60 Hz
- **INSTRUCTIONS COVER** Single Color (Non-Dimmable) Single Color Dimming (Dali, 0-10 V)
- **DIMENSIONS** (LxWxH) 47.5" x 1.7" x 2.4" (1,206 x 42 x 60 mm) for 4 ft section
- **WEIGHT** 6.2 lbs (2.8 kg) for 4 ft section
- **MAX. PROJECTED AREA** 0.6 ft² (0.05 m²) for 4 ft section



Documents / Resources

	<p>LUMASCAPE LS9032 Linearlux L3 Foundation [pdf] Instruction Manual LS9032 Linearlux L3 Foundation, LS9032, Linearlux L3 Foundation, Foundation</p>
--	---

[Manuals+.](#)