



# Luminii LL42-MONO Linear LED Strip Instruction Manual

[Home](#) » [luminii](#) » Luminii LL42-MONO Linear LED Strip Instruction Manual 

## Luminii LL42-MONO Linear LED Strip Instruction Manual



### Contents

- [1 LineLED 24V Installation Instructions](#)
- [2 Documents / Resources](#)
  - [2.1 References](#)
- [3 Related Posts](#)

## LineLED 24V Installation Instructions

### Models LL42-MONO

**Please read all instructions prior to installation and keep for future reference!**


1. PRODUCT SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. ENSURE POWER IS OFF AT FUSE BOX PRIOR TO INSTALLTION TO PREVENT ELECTRICAL SHOCK.
3. USE ONLY WITH CLASS 2 POWER UNIT.
4. SUITABLE FOR DAMP LOCATIONS.
5. FOR UNDER CABINET OR SHELF MOUNT.
6. CONFORMS TO UL STD 2108. CERTIFIED TO CSA STD C22.2 NO.250.0.

**Attention:** Always test Line LED operation before installing.


Connect Line LED to power supply to ensure it is working properly and no damage has occurred during shipping.

Clean the area thoroughly where the Line LED will be installed.


Remove the paper backing from the Line LED and firmly press down making sure there are no air bubbles that can cause surface irregularities. **Do not remove the adhesive, removing the adhesive may cause arcing of the Line LED tape.**

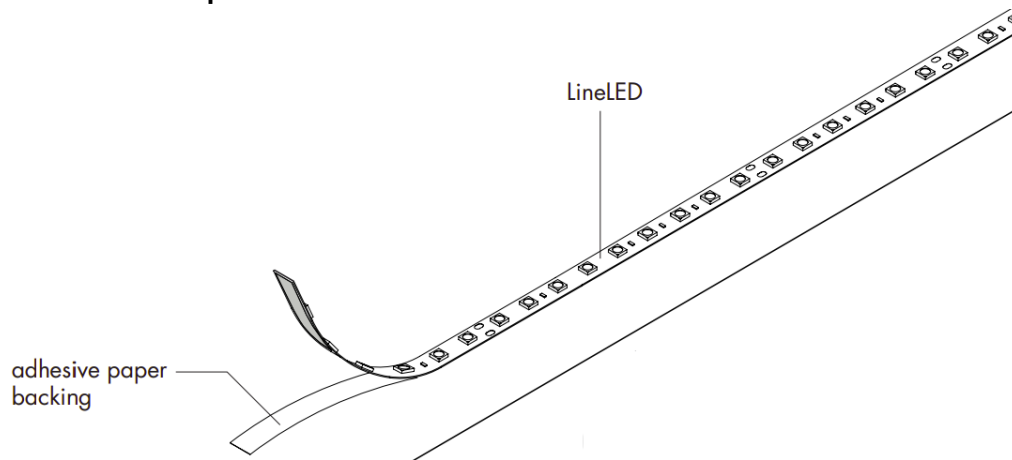


**NOTE** When removing backing & laying Line LED to surface avoid installing with ripples & bending over 90°.

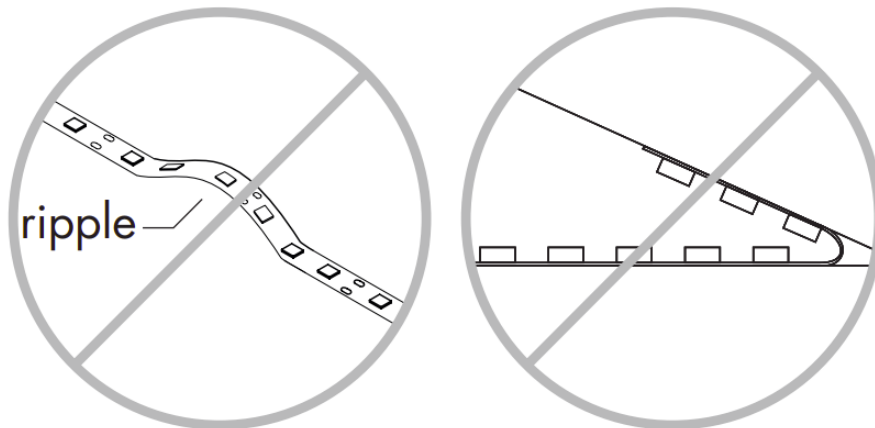

**NOTE** – Avoid sharp bends or bending near 1" on the solder joints.

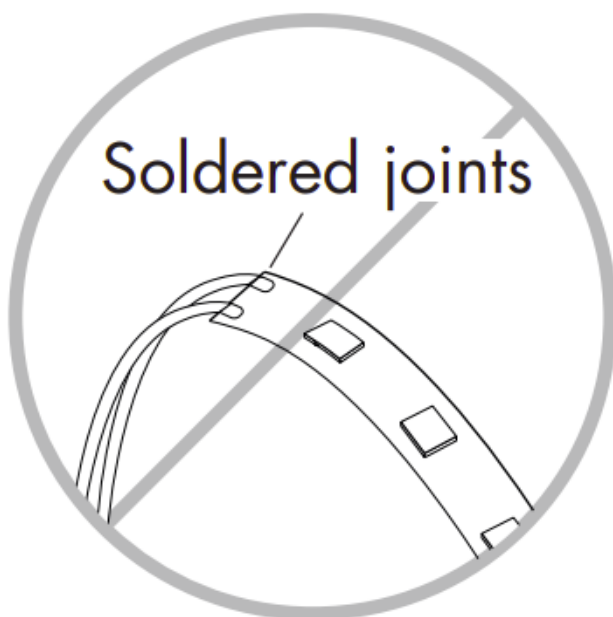

If length of Line LED needs to be adjusted on site, simply cut the LED strip in between solder pads. Always cut from end with no connector/wire leads.

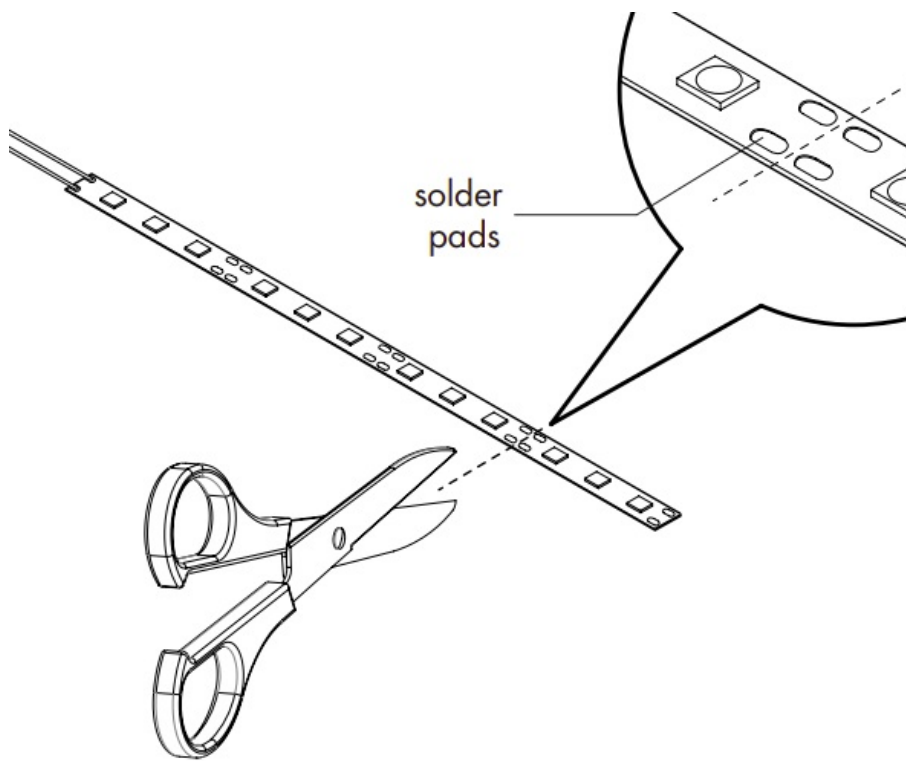


**Please read all instructions prior to installation and keep for future reference!**

1. PRODUCT SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. ENSURE POWER IS OFF AT FUSE BOX PRIOR TO INSTALLTION TO PREVENT ELECTRICAL SHOCK.
3. USE ONLY WITH CLASS 2 POWER UNIT.
4. SUITABLE FOR DAMP LOCATIONS.
5. FOR UNDER CABINET OR SHELF MOUNT.
6. CONFORMS TO UL STD 2108. CERTIFIED TO CSA STD C22.2 NO.250.0.


### **RECOMMENDED LAYOUT FOR MULTIPLE ADJACENT RUNS OF LINELED FED WITH SEPARATE POWER SUPPLIES**

Position power supplies either in the middle of two runs or at the opposite ends.

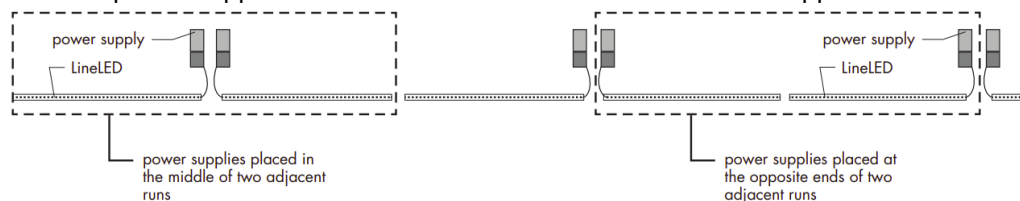


Always ensure power to power supply is off! Follow diagrams to connect power feed wires to power supply. Refer to power supply instructions for wiring line voltage side.

Connect positive wire (plus sign tag or red wire) to RED low voltage wire from power supply. Also, connect negative wire (no tag or black wire) to PURPLE low voltage wire from power supply.

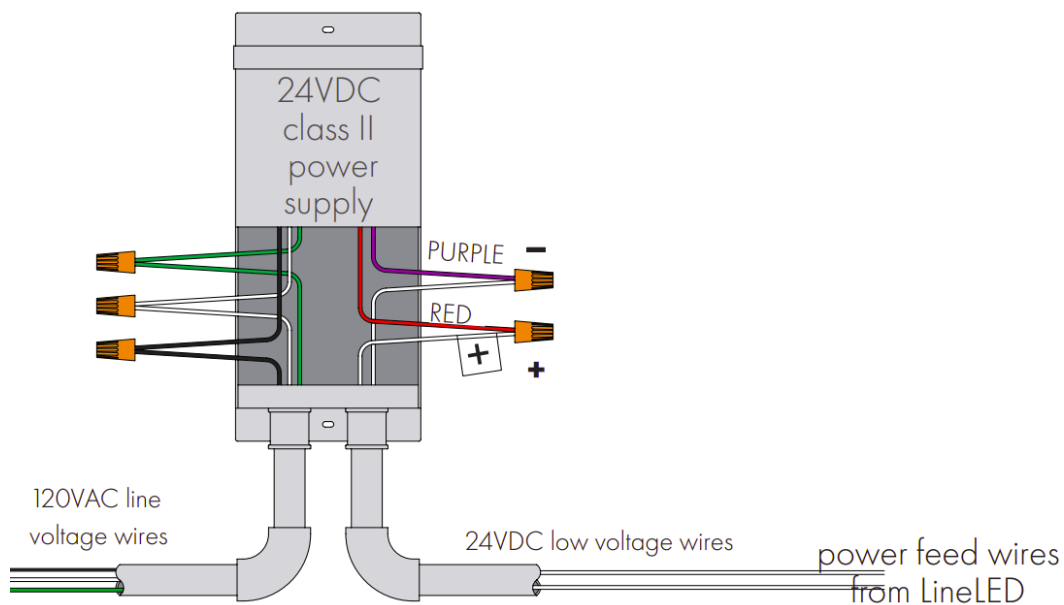


Connect positive middle wire (plus sign tag) to RED low voltage wire from power supply. Also, connect BOTH negative wires (no tags) to PURPLE low voltage wire from power supply

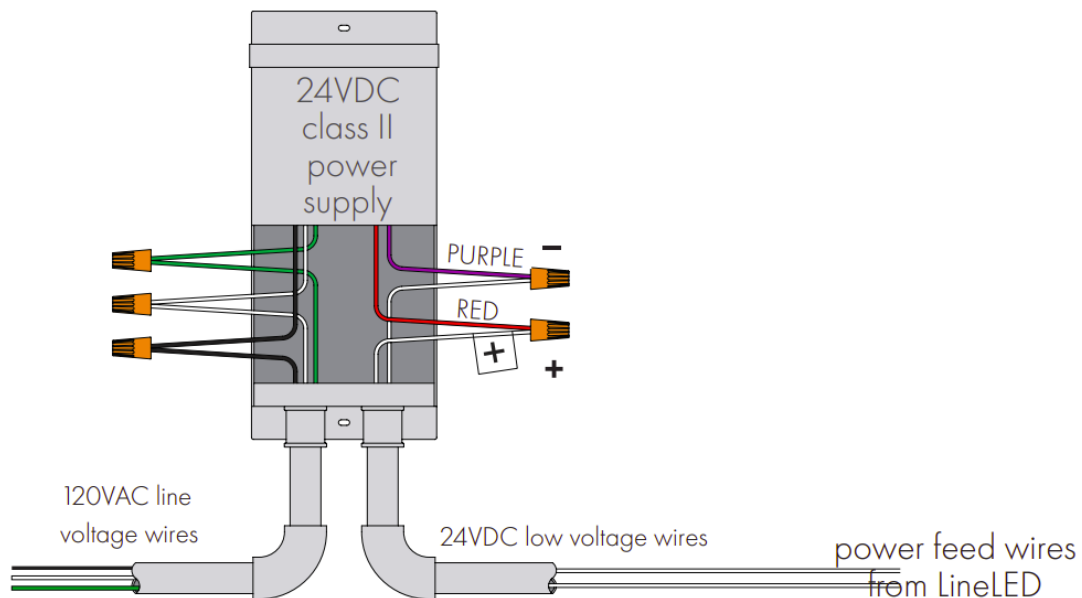

\*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE





[Luminii LL42-MONO Linear LED Strip](#) [pdf] Instruction Manual  
LL42-MONO Linear LED Strip, LL42-MONO, Linear LED Strip, LED Strip, Strip

## References

- [Home - Luminii](#)
- [User Manual](#)