





LUMINTOP










L2 User Manual

Contents [[hide](#)]


- [1 Specifications](#)
- [2 Operation Instructions](#)
- [3 Intelligent Mode Memory Function](#)
- [4 Safety and Warnings](#)
- [5 ENVIRONMENTAL DISPOSAL INSTRUCTIONS](#)
- [6 Warranty](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

Specifications


	Low	Med	High	Turbo	Strobe/ SOS/ B eacon	Flood Light	Red/ B lue Bli nks	Red/ B lue Co nstant
 Output	30 L M	200 L M	650-35 0 LM	1300-3 50 LM	650 LM	100 L M	/	/
 Runtime	40H	7H	2Min+ 4H 30 Min	1Min+ 4H 30 Min	4H /4H /8H	4H 30 Min	96H	48H

 Distance	158m (Max)
 Intensity	6250cd (Max)
 Impact Resistant	1m
 Waterproof	IPX-4
 Light Source	High-performance LED + Red & Blue LED
 Power	10.5W (Max)
 Battery	1 x 18650 Li-ion
 Size	25 x 23.5 x 130mm
 Net Weight	Approx. 83g (excluding headband and battery)

Notice: The above-approximated parameters are Jab-tested by using a 3,7V/ 3000mAh 18650 Li-ion battery, It may vary due to the difference between the environment and batteries. The runtime for High and Turbo mode is accumulated due to the over-heat protection setting.

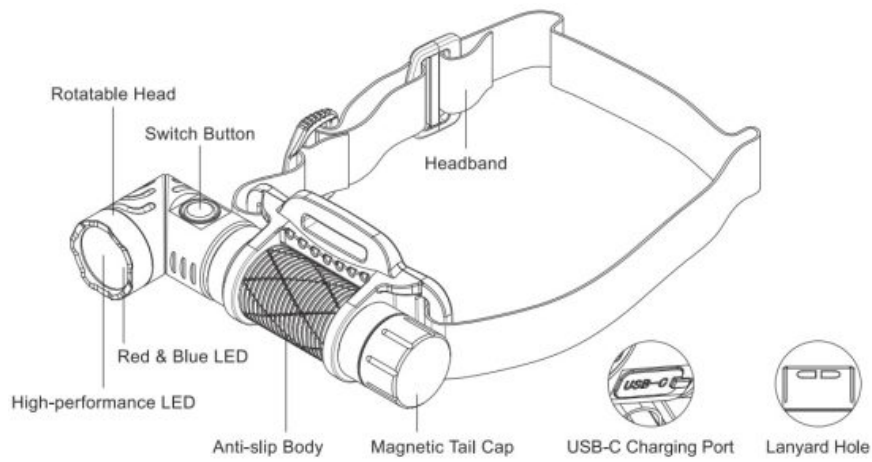

The runtime for High and Turbo mode is accumulated due to the over-heat

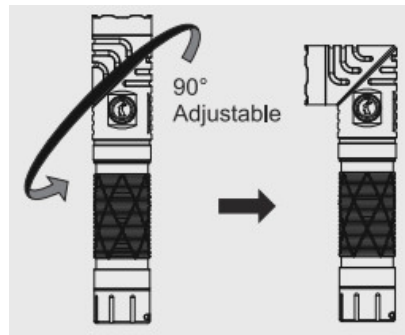

Note:

The hinge is a delicate component. Handle with care to avoid damage.
Avoid dropping the flashlight after adjusting the head.

Operation Instructions

General Mode: Low – Medium – High (with mode memory function)

Blinking Mode: Strobe – SOS – Beacon

Colored Light Mode: Red Steady – Red Flashing – Blue Steady – Blue Flashing –
Red/Blue Police Flash

1. Power On/Off: Single-click the switch.
2. Brightness Adjustment: Long press the switch while the light is on to adjust brightness; release to select the desired level.
3. Turbo Mode: Double-click the switch while the light is on.
4. Strobe Mode: Triple-click the switch to enter strobe mode; triple-click again to cycle through (Strobe – SOS – Beacon).
5. Lockout Mode:

- a. While off, quadruple-click the switch to lock.
 - b. In lockout mode, pressing the switch will momentarily activate Low mode, which turns off upon release.
 - c. To unlock, quadruple-click the switch again or loosen the battery cap to cut off the electricity.
6. Button Locator Light: While off, click the switch seven times to turn the locator light On/Off.
7. Floodlight White Mode: While off, double-click the switch to activate white flood light.
8. Red & Blue Lights: While off, press and hold the switch to enter red/blue police flash mode; single-click to cycle through colored light modes.
9. Battery Indicator:
 - a. Green light: Sufficient power.
 - b. Red light: Low battery warning.

Intelligent Mode Memory Function

The flashlight memorizes and recall the last used general output level when turning on again, excluding the blinking and colored light modes.

USB-C Charging

- Rechargeable via a built-in USB-C charging port.
- Overcharge protection prevents battery damage from overcharging.
- The indicator is color red in charging progress, and turns green when it is fully charged.
- The charging indicator is red during charging and turns green once fully charged.
- After charging, ensure the rubber cover is sealed to maintain the waterproof performance.

Multiple Protection Functions

- Overcharge Protection: Prevent battery damage from EXCESSIVE charging.
- Over-Discharge Protection: Prevent deep discharge that could harm or damage the battery.
- Reverse Polarity Protection: Protects the flashlight from incorrect battery installation.

- **Overheat Protection:** When the flashlight's temperature is high, it will automatically reduce the output to prevent overheating and ensure comfortable use.
- **Low Voltage Protection:** When the voltage is low, the flashlight reduce output and eventually shut down automatically.

Low Power Reminder

When the battery voltage is low, the lamp will blink as a reminder. In this case, please replace or recharge the battery promptly.

Battery Usage

- The flashlight operates on one 18650 Lithium-Ion battery.
- Recharge the battery promptly when the flashlight dims.
- Replace the battery if it is damaged or at the end of its lifespan.
- It is recommended to use batteries from Lumintop or other reputable.
- **Battery Installation:** Ensure the positive terminal (+) is facing the flashlight head.

Safety and Warnings

1. **Battery Warning:** Contains battery. No disassembly, heating above 100°C, or burning.
2. **Choking Hazard:** Contains small parts. Not suitable for children under 3 years old.
3. **Eye Safety:** Do not shine the lamp directly into the eyes to avoid vision damage.
4. **Storage Precautions:** If the flashlight will not to be used for a long time, remove the battery to prevent leakage or damage.

ENVIRONMENTAL DISPOSAL INSTRUCTIONS

Information (for private households) about the environmentally sound disposal of electrical and electronic equipment in accordance with the WEEE directive (Waste Electrical and Electronic Equipment).




This symbol on electrical and electronic products and the documentation that accompanies them indicates that these products may not be discarded together with ordinary household waste. Instead the products must be taken to a designated collection point where they will be received free of charge for disposal, treatment, reuse and

recycling as appropriate. In certain countries products may also be returned to the point of sale when purchasing an equivalent new product. By disposing of this product in the proper manner you are helping to save valuable natural resources and to eliminate the negative effects that the irresponsible disposal and management of waste can have on health and the environment. Please contact the relevant authorities where you live for information about your nearest WEEE collection point. Disposing of this type of waste in an unapproved manner may render you liable to fine or other penalty according to the law.

Warranty

1. 30 days of purchase: Free repair or replacement with manufacturing defects.
2. 5 years of purchase: Lumintop will repair the products free of charge within 5 years of purchase (products with built-in battery 2 years, charger, battery 1 year) if problems develop with normal use.
3. Lifetime warranty: If repair is required after the warranty period, we'll charge for parts accordingly.
4. This warranty does not cover normal wear and tear, improper maintenance, abuse, force majeure damage, or defaults by human factors.

		
https://lumintop.com/	https://www.facebook.com/lumintop	https://twitter

Made in China

LUMINTOP TECHNOLOGY CO., LTD

Address: 7th Fl, Zhichuang Industrial Bldg, No. 1 Baoqing Rd, Baolong St., Longgang
Dist., Shenzhen, Guangdong, China. 518116

Web: www.lumintop.com

Tel: +86-755-88838666

E-mail: service@lumintop.com



EUBRIDGE ADVISORY GMBH

Virginia Str. 2 35510 Butzbach, Germany 49-68196989045


eubridge@outlook.com



TANMET INT'L BUSINESS LTD

9 Pantygraigwen Road, Pontypridd, Mid Glamorgan, CF37 2RR, UK

tanmetbiz@outlook.com

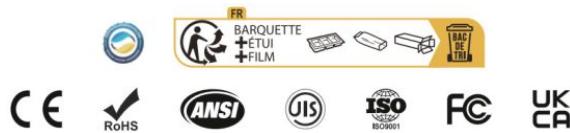

Documents / Resources

	LUMINTOP L2 Multi Function Rechargeable Flashlight [pdf] User Manual 250326, L2 Multi Function Rechargeable Flashlight, L2, Multi Function Rechargeable Flashlight, Function Rechargeable Flashlight, Rechargeable Flashlight, Flashlight
--	--

References

- [User Manual](#)

■ LUMINTOP

◆ 250326, Flashlight, Function Rechargeable Flashlight, L2, L2 Multi Function Rechargeable Flashlight, LUMINTOP, Multi Function Rechargeable Flashlight, Rechargeable Flashlight

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.