



SELECTABLE LED WRAPAROUND FIXTURE

SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- La instalación, el servicio y el mantenimiento de las luminarias deben ser realizados por un electricista autorizado y calificado.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.

⚠ AVERTISSEMENT

- Avant d'installer, d'entretenir ou d'effectuer une maintenance de routine sur cet équipement, veuillez suivre ces précautions générales.



SELECTABLE LED WRAPAROUND FIXTURE

SAFETY AND INSTALLATION INSTRUCTIONS

- Pour réduire le risque de décès, de blessures corporelles ou de dommages matériels dus à un incendie, un choc électrique, des chutes de pièces, des coupures/abrasions et d'autres dangers, lisez tous les avertissements et les instructions inclus avec et sur la boîte du luminaire et toutes les étiquettes des luminaires.
- Une mise à la terre appropriée est requise pour assurer la sécurité.
- L'alimentation doit être coupée au niveau du disjoncteur avant l'installation ou l'entretien de cet équipement.
- L'installation, l'entretien et la maintenance des luminaires doivent être effectués par un électricien qualifié et agréé.
- Portez des gants et des lunettes de protection à tout moment lors de l'installation, de l'entretien ou de la maintenance du luminaire, et évitez de regarder directement la source lumineuse lorsqu'elle est allumée.
- N'installez pas de produit endommagé. Inspectez le luminaire pour vérifier s'il présente des dommages qui ont pu se produire pendant le transport. S'il est endommagé, contactez immédiatement le fabricant.
- Ces instructions ne prétendent pas couvrir tous les détails ou variations de l'équipement ni fournir toutes les éventualités possibles que vous pourriez rencontrer en rapport avec l'installation, l'exploitation ou la maintenance. Si vous souhaitez des informations supplémentaires ou si des problèmes particuliers surviennent et qu'ils ne sont pas suffisamment couverts pour les besoins de l'acheteur ou du propriétaire, contactez le fabricant.

CAUTION





- Install this fixture in accordance with country, regional and local laws and regulations.
- If unsure about the installation or maintenance of this luminaire, consult a qualified electrician and check the local electrical code.
- To prevent wiring damage or abrasion, do not expose the wiring to the edges of sheet metal or other sharp objects.
- Do not alter or create any new holes in the wiring enclosure.
- Verify the supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.
- Avoid direct eye exposure to the light source while the luminaire is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow the fixture to cool before maintenance or handling.

NOTICE


- The GREEN ground screw is in the proper location. Do not relocate.
- Minimum 90°C supply conductors.
- Specifications and dimensions subject to change without notice.
- Suitable for damp and dry locations.

Installation Instructions

- Remove the lens from the housing using the provided suction cup. Press the suction cup on one end of the lens to absorb the lens. Pull the suction cup to detach the lens from the housing.
- Use the luminaire as a template by placing it on the junction box and mark the four mounting hole positions on the ceiling. Lay the luminaire aside and drill the four holes. Insert one of the provided anchors into each hole.
- With the help of an assistant, make the necessary electrical connections and then secure the fixture to the ceiling using the four provided screws.
- Select the desired wattage and CCT. See the Field-Adjustable Wattage and CCT section.
- Install the lens by starting at one end of the housing. Insert the lens slot onto the edge of the housing and carefully squeeze the lens to engage the opposite side of the lens with the housing. Continue this action down the length of the lens until the lens is fully installed onto the housing.
- Turn on the luminaire to verify proper operation.

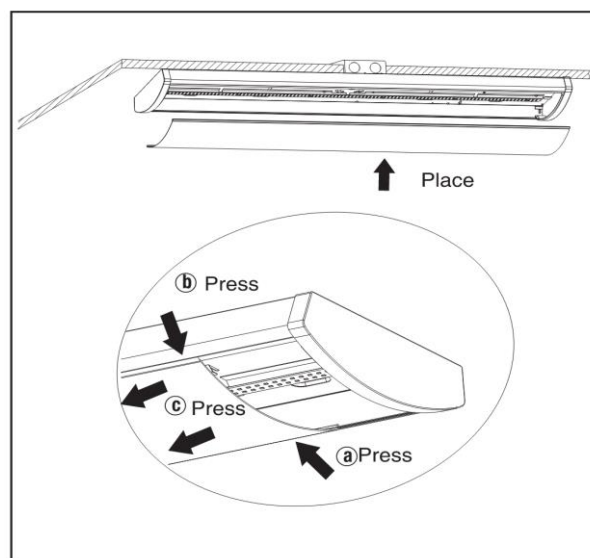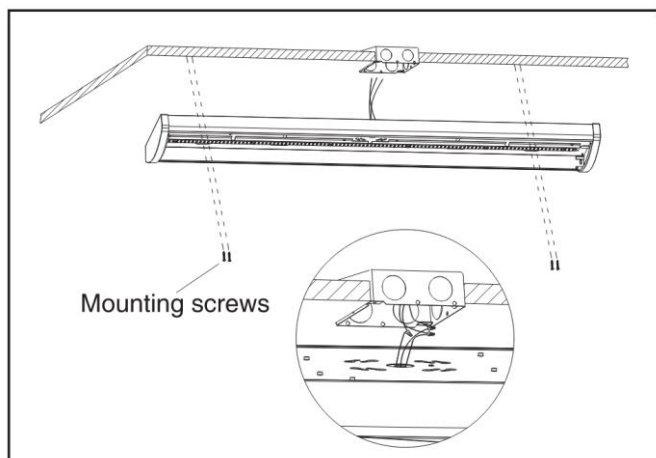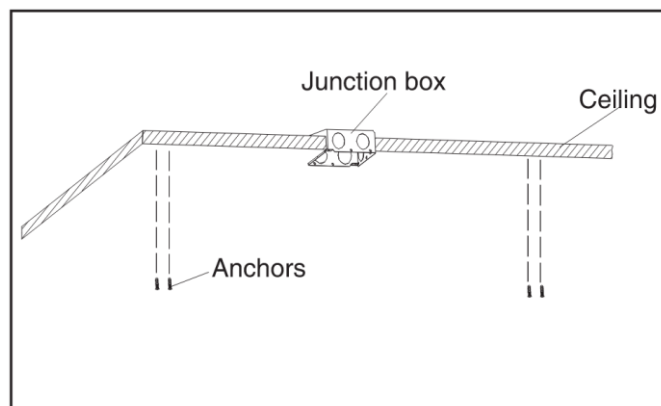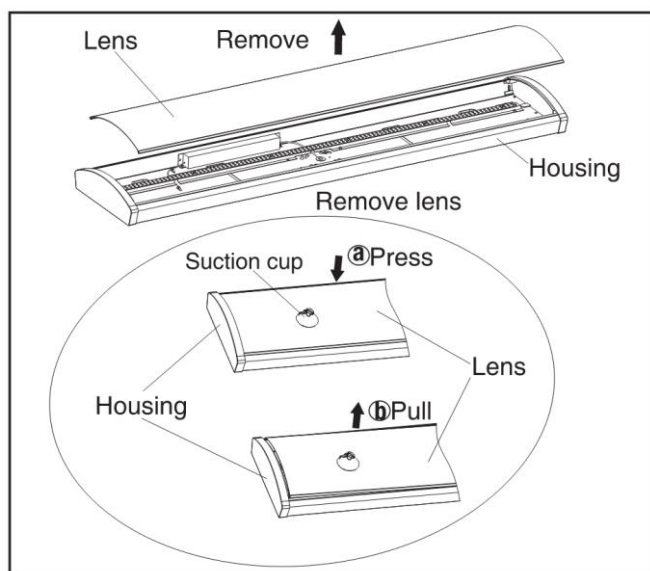

Wiring Diagram

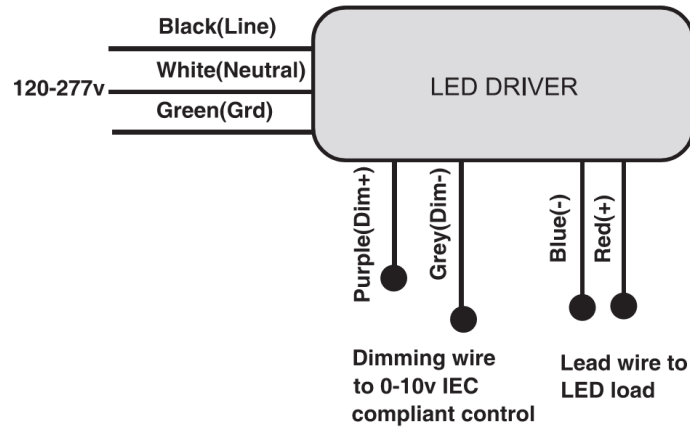

Field-Adjustable Wattage and CCT

- The end user may adjust the lumen output (wattage) and color temperature (CCT) by the two DIP switch buttons located on the top of the driver.
- Each DIP switch is accommodated with 3 options (left, middle, right), corresponding to 3 wattages and 3 color temperatures respectively, which can perform the desired lumen output and color temperature combination.
- Select a wattage and color temperature by sliding the switch left or right respectively to the desired setting.
- Default Settings: 54W and 5000K

