



# Dekala ArkenStone™ Smart Light Therapy Alarm Clock

#### Instructions


## -Scan QR Code to Download User Manual-




## **CONTENTS**

Elements	01
Controls	01
Feature Description	02
Mobile Phone Connect to 2.4GHz WiFi	03
Quick Guidance	04
App Guidance	05
Voice Control	16
Usage	20
Specification	31
FAQ	31
Notes	33

# Elements

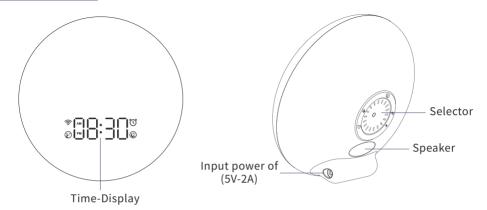

# Controls





Selector



Alarm clock



Sleep-aid



Snooze/Wi-Fi



Volume



Setting

## **Feature Description**

- This product is a smart product integrating wake-up alarm clock, colorful atmosphere lamp and sleep-aid white noise.
- The product is aesthetically designed to a candy-drop shape, can be used both horizontally and vertically to let you have a multi-angle lighting experience.
- The 360° HD reflective casing allows a better visibility on the Time-Display, The time-display visibility (brighteness) is adjustable from level 1 to level 4(can also be completely hidden if wanted to). making sure it's always suitable for every occasion in your life.
- Automatic time calibration when connecting to Wi-Fi,Time-Display system can be switch between duodecimal hour system(12-hour clock) and military time(24-hour clock).
- Comes with two sets of alarm clock, simulate the sunrise lighting effect, gradually lights up 5-120 minutes (brightness increasing rate changes accrodingly) in advance before your preset wake-up schedule. Tip the device over or set the device upright to re-enter snooze mode.
- Lighting color selectable from a 16-million digital pallet, customize your favourite color by a touch of your finger and create your own vibe in your room.
- The relaxing night light simulates the fireplace, brings you harmony before turning in, naturally boost your melatonin at night so you can have a good dream!
- 9 uniquely designed ambient lights optional, freely turn on any one of them for all the beautiful momments in life!
- Specially designed Hi-Fi speaker is built on a uniquely designed sound chamber, offers an immersive experience with premium sound.
- Arkenstone comes with 11 selectable sleep-aid white noises and 10 lighting effects, volume adjustable from level 1 to 10. Your whole family can enjoy inner peace after the light/sound gradually mutes within a preset time range (5-120 mins).
- App remote control, freely turn on/off your favourite light as well as enter all settings in detail on your smartphone(IOS and Android both available).
- Voice control, supports Amazon Alexa and Google Home, makes your already-smart lifestyle even smarter!

## Mobile Phone Connect to 2.4GHz WiFi

#### Connect your smart phone to a 2.4 GHz WiFi network during setup

① If you're connecting your Dekala Kids Alarm Clock directly to your router's WiFi network, it's important to understand that your smart phone must connect to the same WiFi network as the alarm clock during setup.

(**Note:** Once the alarm clock is successfully connected to WiFi, your phone can use other networks at will, without having to be connected to the same WiFi as the alarm clock.)

② Your alarm clock can only connect to a 2.4 GHz WiFi network. Many routers broadcast WiFi networks in both 2.4 GHz and 5 GHz bands, so your phone might connect to the 5 GHz WiFi band. During setup, connect your phone to your 2.4 GHz WiFi network, then connect your Kids Alarm Clock to that same 2.4 GHz WiFi network.

#### Find your 2.4 GHz WiFi network name and password

Your phone might connect to your 5 GHz WiFi network most of the time. If you're not sure about how to find the 2.4 GHz WiFi network:

① Look on your WiFi router label.

Many routers have a label that shows the WiFi network name, which is also called an SSID.

Your 2.4 GHz network name might have a 2, 2.4, or 2G at the end. Your 5 GHz network name might have a 5 or 5G at the end. If you changed your WiFi settin- gs, then check the place where you saved your custom settings.

② If your WiFi network name or SSID doesn't indicate whether it's 2.4 GHz or 5 GHz, ask your internet service provider (ISP) or the person who set up your WiFi router or refer to the video below to find the answer (scan the QR code)



Split WiFi into dual band 2.4GHz &5GHz

#### Connect your phone to a 2.4 GHz network

- 1 Turn on your phone's WiFi.
- ② Select a 2.4 GHz WiFi network. This is commonly indicated by a 2, 2.4, or 2G at the end of the network name.
- $\ensuremath{\mathfrak{G}}$  If prompted, enter the password for the network.

## **Quick Guidance**

## General functions and settings

## Color Light

Press to turn on the light, rotate to adjust the brightness, press again to switch the light mode.

Double-press to switch color/style under the current ambient light mode(some of the 9 ambient light modes come with more than one color option, please see page 27 and page 28 as reference). Long-press for 3 seconds to turn off the light.

### Sleep-aid

## Sleep-aid

Press to switch on/ off sleep-aid mode.

Long-press to enter setting, rotate to select, press to apply and continue to more detailed settings.

#### - Alarm Clock

#### ♂ Alarm clock

Press to turn on/ off the alarm.

Long-press to set the alarm, rorate to adjust the time and press to apply and continue to more detailed settings.



Attention: During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

### **Volume Function**

#### **◄**)) Volume

press (1) to enter the volume adjustment, rotate to adjust the volume.

### Time-Display

## Setting

Press to adjust the visibility (brightness) of Time-Display.

Long-press to manually calibrate the hour and minute, press to confirm.

## Wi-Fi Connecting

Plug in to power, flashes to enter Wi-Fi connecting status. If Wi-Fi connection fails, Long-press to enter compatible mode (flashes more slowly) and wait a few seconds to enable the device re-try connecting to your Wi-Fi.

If  $\stackrel{\clubsuit}{\diamondsuit}$  stays solid (not flashing at all), Long-press  $\bigodot$  to enter Wi-Fi connecting status. ( $\stackrel{\clubsuit}{\diamondsuit}$  flashes after successfully enters Wi-Fi connecting status)

## **App Guidance**

#### Wi-Fi Setup

#### 1. Download the App


Download "Smart Life" from App Store / Google Play or Scan the QR code, sign up and log in.



Attention: Turn on GPS location, Wi-Fi (2.4 GHz only) and bluetooth before connecting device to your Wi-Fi (2.4 GHz only), then you can choose auto-search and connect or manually connect.

#### 2. Wi-Fi connecting mode

- ① Plug in to power, the flashing **?** indicates the device is now under Wi-Fi connecting mode;
- ② If the stays solid, Long-press 😥 till stlashes to enter Wi-Fi connecting mode.

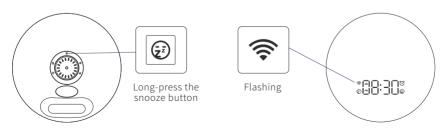

Attention: Connect to 2.4 GHz Wi-Fi only.

### Connect device to App

#### App auto-search and connect

① Open up"Smart Life" App, click "\undersigned";



 $\ensuremath{\textcircled{2}} \mbox{ Click on } \mbox{"} \mbox{Go to add"} \ ; \\$ 





- ④ Type in 2.4 GHz Wi-Fi password and click on "Next" (make sure the smartphone and Smart Life App are both connected to 2.4 GHz Wi-Fi);
- ⑤ Put the device, your smartphone and the router in the same area when connecting(as closely as possible);
- ⑥ You can re-name the device after it successfully connects to your 2.4 GHz Wi-Fi,click on "Done" to complete the Wi-Fi setup process. When " "stays solid and high-lighted, it means that the device is currently connected to Smart Life App and your Wi-Fi.







## App setting page

#### 1. ArkenStone™ home page

Time-Display

Alarm 1 switch/setting

Alarm 2 switch/setting

Sleep-aid setting



Night light setting

Color light setting


Ambilight setting

#### 2. Time setting

Device automatically calibrates with real time after successful Wi-Fi connection, you can also manually calibrate the time and switch between duodecimal hour system (12-hour clock) and military time (24-hour clock) on the App.

Tap the time display section to enter device setting page, it allows you to customize your desired screen display with all the detailed settings;

\* The device automatically saves the settings.

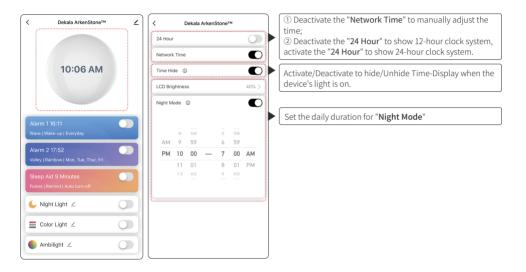

#### 3. Alarm clock setting

Attention: The two sets of alarm clocks are set within the same process, and the alarm clock button( ) in the back of the device is able to deactivate both alarm yet can only activate "Alarm 1"

#### Take Alarm clock 1 as a demostration

- ① You are able to activate/deactivate both alarms clocks(**Alarm clock 1** and **Alarm clock 2**) from the ArkenStone<sup>™</sup> home page;
- ②Tap "Alarm 1" section to enter "Alarm 1" setting page, the device will auto-save all your customized settings.
- ③ During the alarm beeping: Click "Stop" on the ArkenStone™ home page to completely turn off the alarm; click "Snooze" to turn on snooze mode(stops beeping for 9 minutes to give you a short nap).
- \* You can gently tip over or set the device upright to repeatedly turn on snooze mode.







#### 4. Sleep-aid setting

- ① You are able to activate/deactivate "**Sleep-aid**" mode from the ArkenStone™ home page;
- ② Tap "Sleep-aid" section to enter the "Sleep-aid" setting page, the device will auto-save all your customized settings.





#### 5. Night Light setting

- ① You are able to turn on/off **Night Light** from the ArkenStone<sup>™</sup> home page;
- ② Tap "Night Light" section to enter "Night Light" page, adjust the brightness level.





#### 6. Color Light setting

- ① You are able to turn on/off **Color Light** from ArkenStone<sup>™</sup> home page;
- ② Tap "Color Light" section to enter the "Color Light" customizing page, you can customize your favourite color from the 16-million color board. The device will auto-save all your customized settings.





#### 7. Ambilight setting

- ① You are able to turn on/off **Ambilight** from ArkenStone<sup>™</sup> home page;
- ② Tap"Ambilight" section to enter the "Ambilight" selecting page, you can re-name "Ambilight" to your liking, such as "Michael" or "Lily"(for voice command purposes) .
- ③ Long-press the following Sub-Ambilight modes for more detailed setting.






#### 8. Other setting

Click " $\angle$ " in the upper right corner to enter, on this screen you can view device information. Third party control guidelines, Offline notification, remove the device and so on.



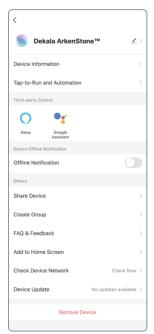


## **Voice Control**

#### Take "Alexa" connecting setup as an example

Attention: Make sure device has already linked with the Smart Life App


- ① Download "Amazon Alexa" from Google Play / App Store and sign up (If you are already an Alexa user, you can just open it) .
- ② Choose Skills & Games, search Smart Life and ENABLE TO USE Smart Life.

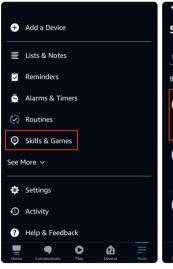






③"Launch" and log in to Alexa Smart Life with the same username and password you have for Smart Life App and tap "Agree and link". You are able to voice control the device with Amazon Echo (Alexa) after seeing "Your Smart Life account has been succesfully linked."

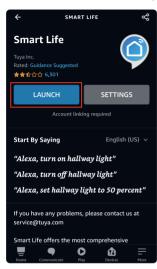

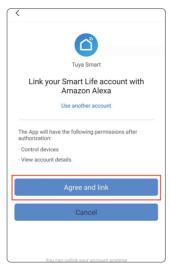




④ Open Smart Life App to check if the third-party control has linked, if it shows yes, it means the two accounts has linked up on cloud. You can rename the device with Smart Life App and Alexa will automatically synchronize the new name via cloud.

Attention: You can also have Alexa discover new devices and repeat the linking process to re-link with the re-named device via Smart Life App.(only an optional operation)



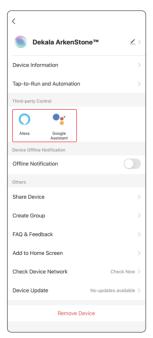



#### Voice control

You can re-name all the functions of device, Alexa will sync with the new names and recognize them as voice commands.

Works with Alexa / Google smart home.

Attention: Minor delay might occur due to various Wi-Fi speed and cloud processing system, when device or Alexa fail to react to voice control, please wait for a few minutes and try again.

Here are some commands to try

"Alexa, Turn on/off the Night Light"

"Alexa,Set Night Light to 20%"

"Alexa, Turn on/off the Color Light"

"Alexa,Change Color Light to red"

"Alexa,Turn on/off the Alarm"

"Alexa,Turn on/off the Sleep-aid"

## Usage

#### Set the functions

#### 1. Manual time-setting

① Plug in to power, long-press time-setting;




to enter manual

② Rotate to select the corret hour, press to apply and continue;













3 Rotate to select the corret minute, press to apply and continue;



4 Rotate to select the desired Time-Display system(12H or 24H), press to confirm and complete time-setting;









Attention: During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

#### 2. Time-Display visibility control


Press to select the visibility(Off, 10%,40%,70%,100%) of the Time-Display, you can do the same thing on the Smart Life App, the default visibility is at 40% of its maxium brightness.



#### Alarm Clock

#### 1. Turn on/off alarm

①When the device is under Time-Display page, press to activate Alarm clock 1. the digits flashes for 3 seconds to show the preset alarm time, the alarm clock icon stays solid.







Attention: 1.The two sets of alarm clocks are set within the same process, and the alarm clock button( To ) in the back of the device is able to deactivate both alarm yet can only activate "Alarm 1"

2. Device can set week-day alarms and weekend alarms separetely via Smart Life App.


#### 2. Alarm setting

① Under Time-Display page, long-press \ till alarm icon \ on the screen flashes to enter alarm setting mode:






② Rotate to select the corret hour, press to apply and continue;






③ Rotate ② to select the corret minute, press to confirm and continue to alarm-sound selecting;




4 Rotate to select the desired alarm-sound (S-01 to S-05), press to apply and continue to volume level selecting;






Attention: During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

® Rotate to select the alarm-sound volume(U-01 to U-10), press to confirm and continue to lighting effects selecting;






© Rotate to select the lighting effect(E-01 to E-11) press to confirm and continue to brightness level selecting;






Attention: During the alarm, the lighting effects change accordingly to your "Ambilight" and "Color Light" customization

Rotate to select the brightness level
 (L-01 to L-08) press to confirm and continue to lighting-in-advance\* setting;





® Rotate to adjust the desired duration for lighting-in-advance\* (from 5 to 120 minutes) press to confirm and complete alarm clock setting.





**lighting-in-advance\***: this function enables the Arkenstone to slowly light up ahead of your preset alarm-time. We want to make sure your body gently adapts to the alarm- lighting while you are still asleep, giving you a comfortable and pleasing wake-up.


Attention: The lighting can be turned on before the preset alarm-time, and turned off by long-press for 3 seconds.


#### Snooze

#### (Gives you multiple 9-minute naps before completely waking up)


#### Activate/deactivate snooze mode

① During the alarm beeping, press or or or turn on snooze mode (alarm-sound pauses for 9 minutes while both of and on the screen keep flashing), you can turn on snooze mode repeatedly up to 5 times per each preset alarm.





- \* You can gently tip over or set upright the device to repeatedly turn on snooze mode.
- \* During the alarm beeping, press any of the three buttons: \( \bigcirc \rightarrow \right





③ Press to deactivate alarm completely.







Attention: the alarm gets automatically turned off after 30 minutes of beeping without any operation on the device.

### Sleep-aid mode

#### 1. Activate/Deactivate sleep-aid mode


 $\ensuremath{\textcircled{1}}$  When the device is under Time-Display page, press








② Press ③ or 🐸 to deactivate sleep-aid mode as well as hide the sleep-aid icon.






#### 2. Sleep-aid setting

① When the device is under Time-Display page, long-press till ② flashes to enter sleep-aid setting mode







② Rotate to select sleep-aid sound(S-01 to S-11), press to confirm and continue to volume level selecting;






③ Rotate to select sleep-aid sound volume (U-01 to U-10), press to confirm and continue to sleep-aid lighting effects selecting;













Attention: During the alarm, the lighting effects change accordingly to your "Ambilight" and "Color Light" customization.

® Rotate to select brightness level (L-01 to L-08), press to confirm and continue to sleep-aid duration setting;

© Rotate to set sleep-aid duration (from 5 to 120 minutes), press to confirm and complete sleep-aid setting.










### Volume adjustment function

When the alarm or sleep-aid sound is on, press volume adjustment, and rotate for adjust the volume.

Attention: When the alarm or sleep-aid sound is on, you can rotate to adjust the brightness.



### Color Light function

#### 1. Turn on/off the Color Light


① Plug in to power, press to turn on the Color Light;





② When the Color Light is on, long-press for 3 seconds to turn off the Color Light.






Time-Display.



Attention: When the color light is on, click to adjust the brightness of the Time-Display or turn off the

#### 2. Brightness control

① When the light is on, rotate clockwise to increase the brightness;






② When the light is on, rotate counter-clockwise to decrease the brightness.







#### 3. Manual lighting-effect switching diagram

\*Most colors can be customized from Smart Life App.
All customization will be automatically memorized by the device.

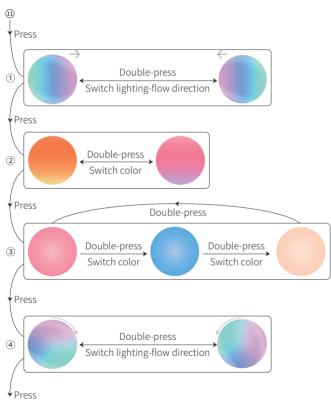

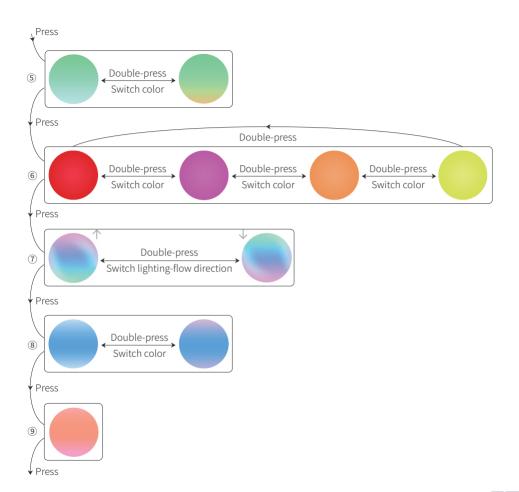

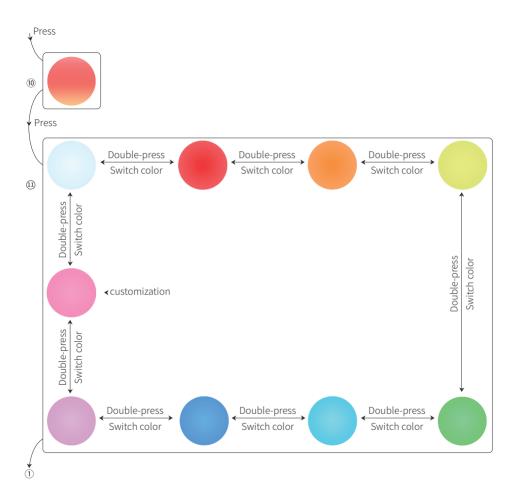

# Specification

Model	SAL
Material	PC、ABS、Metal
Color	White
Weight	556g
Size	180x180x90.3mm
Adaptor	5V-2A
Input	100-240V
Speaker	4Ω 2W
Power	10W(MAX)
Communiccation mode	Wi-Fi 2.4GHz & Bluetooth
Control mode	Button control, APP control and Voice control
Packing list	ArkenStone™ X1, Use guide X1, Adapter X1, Charging cable X1
Certification	F© (E ® X &

## **FAO**

- 1. The device cannot be connected?
- ① Please put the router, device and mobile phone in the same area (as closely as possible).
- ② Please make sure your Wi-Fi signal is strong or usable at least.(only 2.4GHz Wi-Fi network is supported)
- ③ To connect to a different smartphone or Wi-Fi network, please long-press to re-enter Wi-Fi connecting mode.

#### 2. App suddently loses control over the device?

- 1) Please make sure that the device is powered on.
- ② Check the strength of the Wi-Fi signal (open a random web page as testing) and whether the device and your smartphone are connected under the same Wi-Fi(2.4GHz only)
- ③Re-open Smart Life App and try again.

#### 3. How to reset Wi-Fi connection on the device?

Long-press  $\begin{tabular}{ll} \begin{tabular}{ll} \begin{tabular$ 

#### 4. Changes in setting on App don't sync with the device?

- ① Check the Wi-Fi connection between the device and your smartphone and the strength of Wi-Fi signal.(open a random web page as testing)
- ② Re-open Smart Life App and try again.

# 5. Smartphone loses control over the device when under separated locations(different Wi-Fi)?

- ① Check the strength of Wi-Fi signal(open a random web page as testing), and make sure the device and your smartphone are connected under the same Wi-Fi.(2.4GHz only)
- @Re-start the router and try connecting the device and your smartphone via Smart Life App again. (under the same Wi-Fi, 2.4GHz only)

#### 6. Other issues

If issues still occur under the instructions above, please go to the ArkenStone™ home page on Smart Life App and click ▲ at the top right and select "FAQ & Feedback", then tap "Unresolved? Send Feedback" to submit your issue, and feel free to contact us by E-mail at info@dekalastore.com, our troubleshooting team will get back to you ASAP.

## **Notes**

- Please wipe this product with a soft cloth.
- Do not scrub this product with abrasive cleaning agents, rough chemicals, alcohol, acetone cleaning agents, etc., so as not to damage the surface of the product.
- Store the product in a safe, dry place that will not be overstocked, bruised or damaged.
- Do not wrap the power cord around the appliance when storing the product.
- Please use the attached power adapter (5V-2A) to avoid damage to the equipment.
- Please use the product under the instructions. Disassembly and collision on the product are strictly prohibited and will void the warranty.
- Please place the product on stable, flat surface when using.
- Do not use it in high temperature, humid or corrosive environment, so as to avoid leakage caused by circuit damage.
- Although the product is family friendly, to reduce the risk of electric shock, be careful with the children in present when using the product.
- This product is not fireproof, please do not throw it into the fire, do not go near the source of fire.
- This product is not waterproof, please do not put it into the water, so as not to damage the equipment.

Feel free to contact us if you need further assistance, our troubleshooting team will get back to you ASAP.

Official Website: www.dekalastore.com

Email: info@dekalastore.com