



INSTALLATION INSTRUCTION

v2

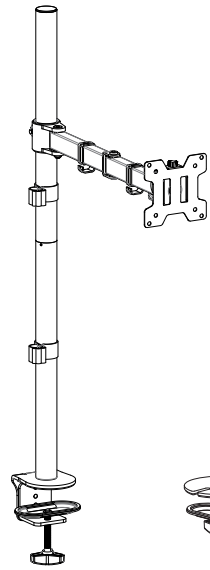

75x75mm

100x100mm

DA-1L

If you have any questions, please feel free to contact Customer Service via Amazon before returning.


Safety Caution

Please read this instruction carefully before installation.
If you do not understand these instructions or have doubts about the safety of the installation, assembly or use of this product, please contact us.


WARNING: This product contains small items that could be a choking hazard if swallowed.
KEEP AWAY FROM CHILDREN UNDER 3 YEARS OLD. ADULT SUPERVISION IS REQUIRED.

Before Starting Assembly


! When attaching brackets to the flat screen, be careful not to over tighten screws and be sure that screws do not bottom out in the mounting holes.
Before starting assembly, verify all parts are included and undamaged. For parts shortage or damage, please contact us.




Too Short



Too Long



Correct




Correct



Do not tighten the screws excessively or your monitor might be damaged.

Hardware Included

Clamp Bracket



01A x1

All are included in 01A



a Clip Plate



b Knob Bolt



c Bracket



d Bolt



e Washer



f Washer

L Plate




01B x1

Round Plate



01C x1

Upper Pole



02A x1

Lower Pole




02B x1

Arm



03 x1

VESA Plate



04 x1

3mm Allen key



05A x1

5mm Allen key




05B x1

Screw M8*10mm




06 x2

Cable Clip







07A x2

Cable Clip




07B x2

Monitor Kit	Philips Screws	Philips Screws	Safety Screw	Spacers
				
	M4 x 12mm x4	M4 x 30mm x4	M5 x 12mm x1	L10mm x8
	M-A	M-B	M-C	M-D


2

Step 1A Clamp Installation

1A-1

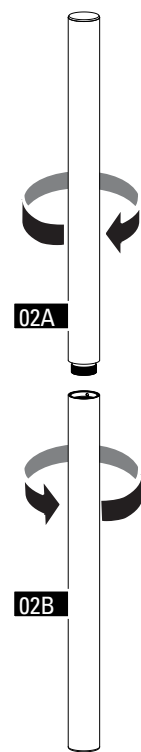

1A-2

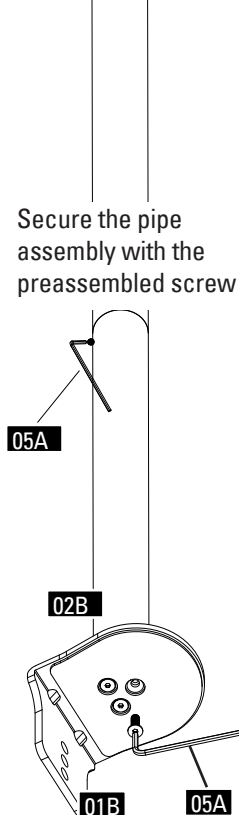

Secure the pipe assembly with the preassembled screw

05A


02B

01B

05A

Secure the L plate 01B to the lower pole 02B with the preassembled screws.

1A-3

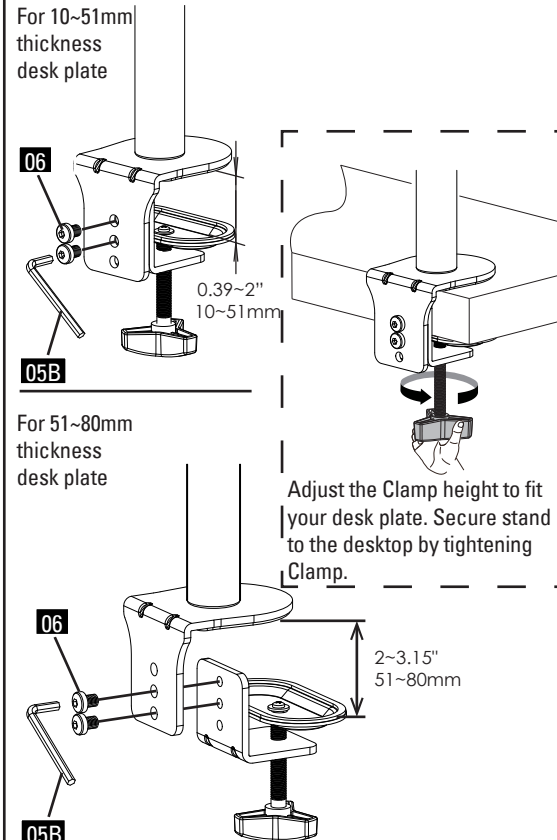

For 10~51mm thickness desk plate

06

05B

For 51~80mm thickness desk plate

06


05B

Secure the clamp bracket to the L plate with the screws 06


3

Step 1B Grommet Base Installation

1B-1

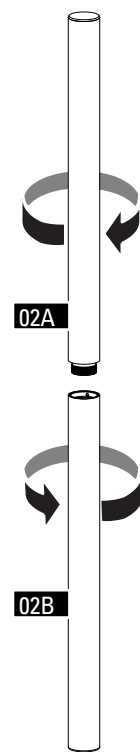


Assemble the upper pole 02A and the lower pole 02B together.

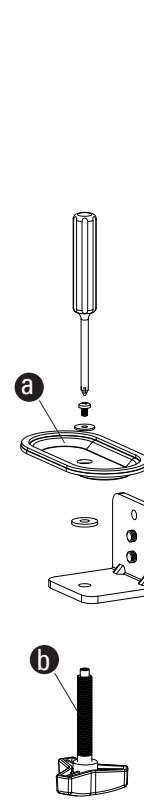

Dis-assemble the clamp bracket. the marked parts a and b will be used in next step.

1B-2

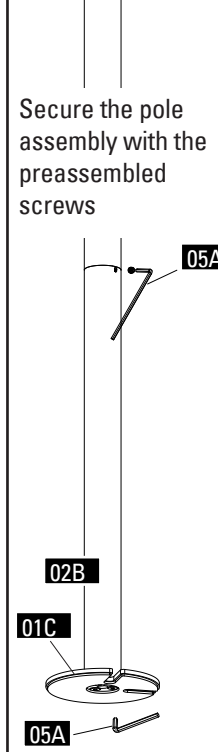


Secure the pole assembly with the preassembled screws

05A

Assemble the round plate 01C to the lower pole 02B with the preassembled screws.

1B-3

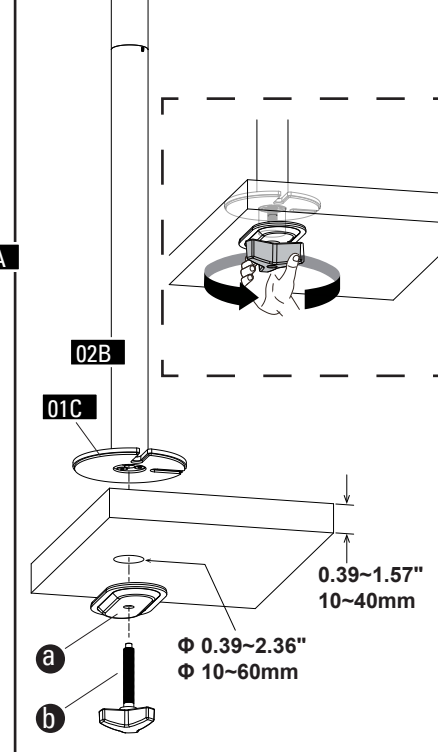


Position pole assembly on the desk then secure it by tightening the knob bolt after making knob bolt b through the Long plate a, desk hole, and the bottom of pipe assembly sequentially.


4

Step 2 Attach the VESA plates to the monitors

(a) For Flat Back

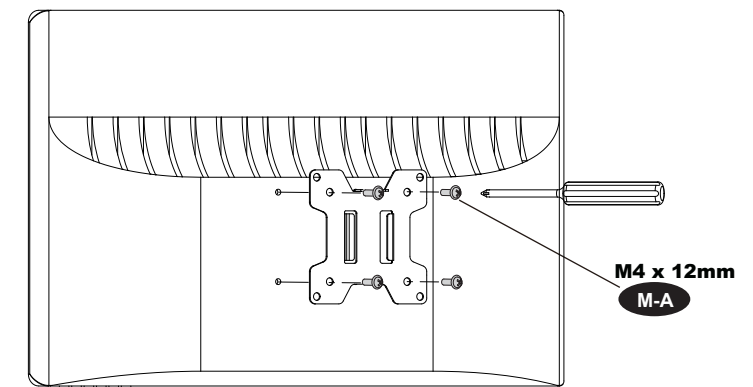

(b) For Recessed / Curved Back

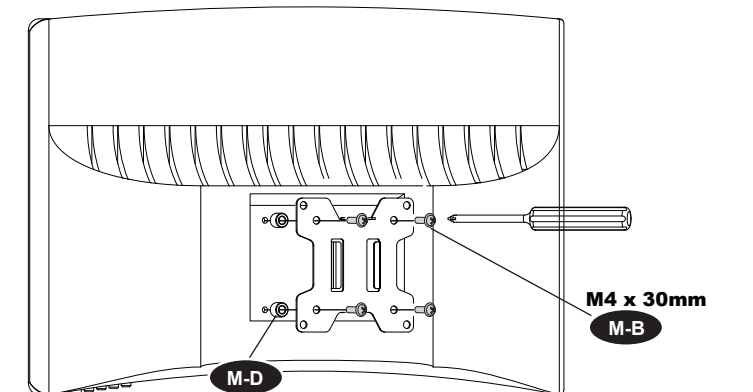


Note: use 1 piece or 2 pieces of spacers M-D


5

Step 3 Attach the monitors to the stand


Assemble the monitor arm 03 and the pole together.

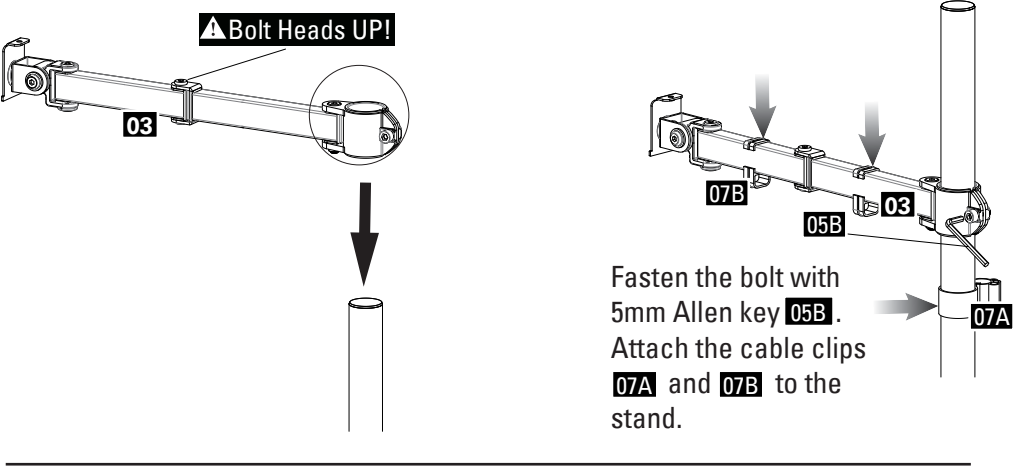


Hang the monitor onto the arm then using the safety screw M-C to secure the monitor.

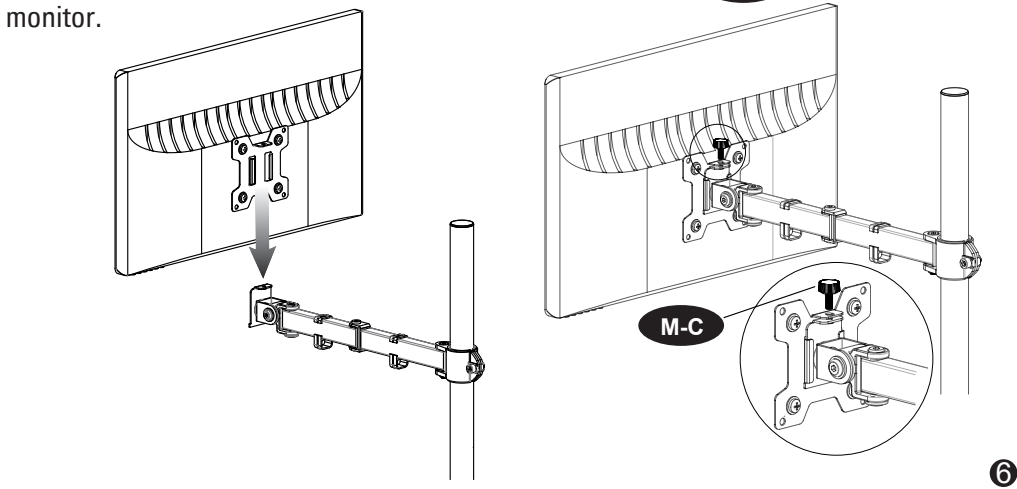

Manage tools and cables

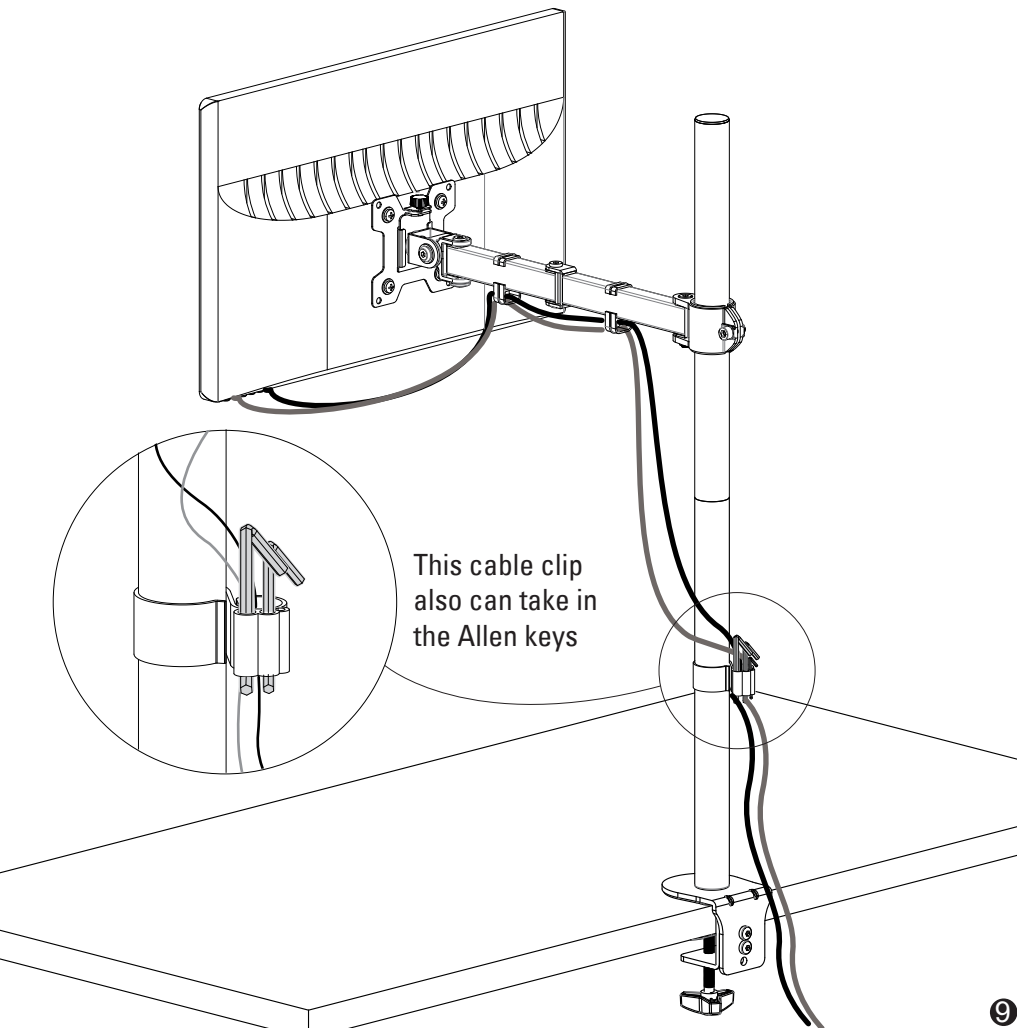


Step 4 Tilting Adjustment

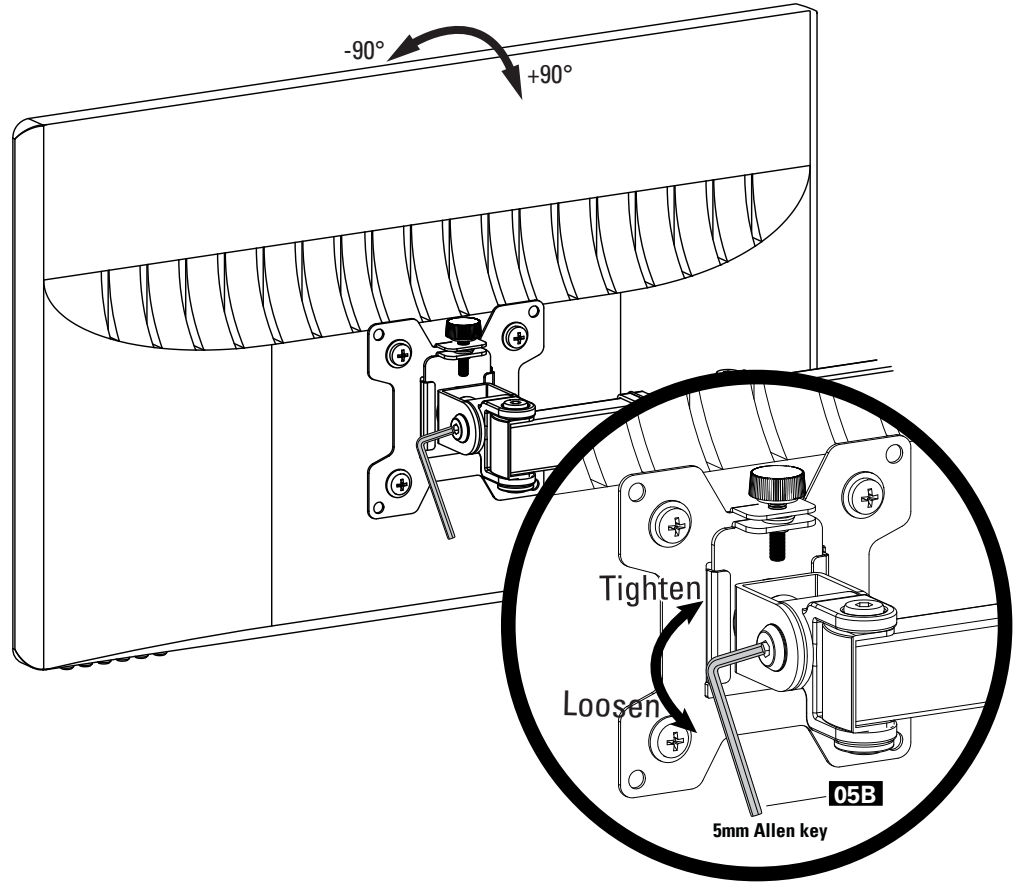


Loosen tilting bolts, pull monitor to your desired angle, then fasten tilting bolts with the 5mm Allen key 05B.

Set the desired angle of the monitor

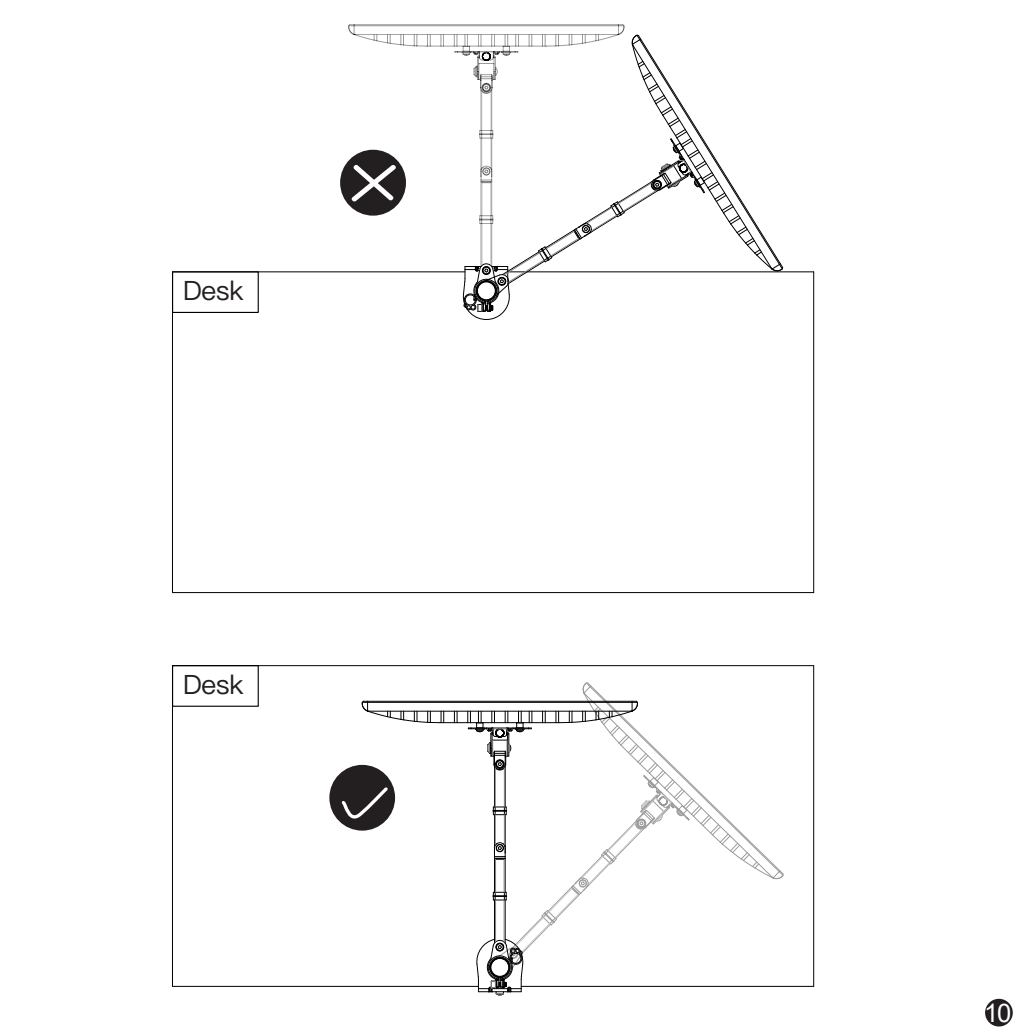

Step 5 Switch screen horizontally and vertically

If needed, the monitor can be rotated ± 90 degrees for switching screen between horizontally and vertically for turn the monitors directly.

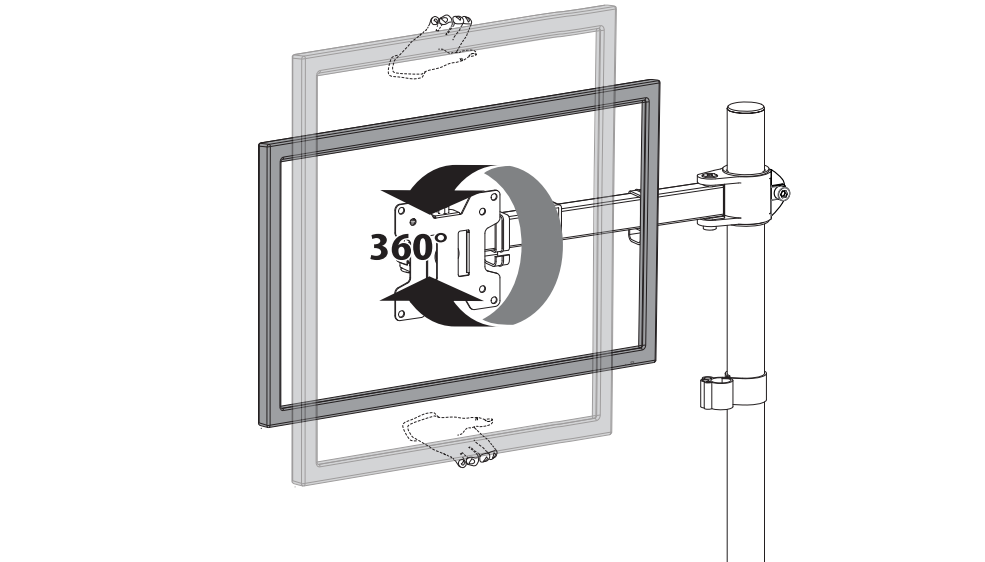

360° Rotation

This function works better for monitors with the center of gravity.

Note: To ensure stability, the tightness of the rotation axis is preset, so it need take some effort to rotate the VESA Plate.

Suggestion: Please attach the monitor first, then hold the two sides of it with both hands, and rotate vigorously. If that doesn't work out, please do not hesitate to ask for our help via Amazon.

Product dimensions

