



DIGITAL DRUM KIT

SETUP GUIDE

DD400X




CONTENTS CHECKLIST

Your kit will arrive in one box and should take around 30 minutes to fully assemble. Please check that all the items below are present before assembly and follow the instructions carefully.


CYMBAL PAD BOX

X1 Cymbal Pad for Hi-Hat
X1 Cymbal Pad for Ride
X1 Cymbal Pad for Crash

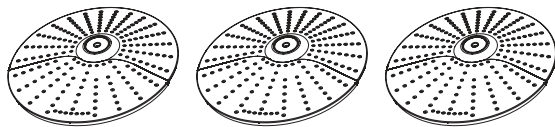


DRUM PAD BOX

X3 Tom Pad
X1 Snare Pad

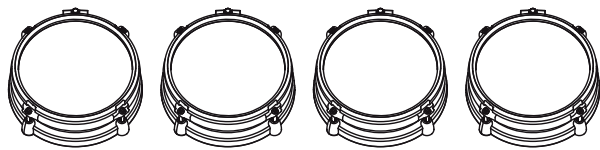

BASS DRUM BOX

X1 Bass Drum Pedal




HI-HAT PEDAL BOX

X1 Hi-Hat Control Pedal




DRUM MODULE BOX

X1 Drum Module




ACCESSORIES BOX

1. X3 Cymbal Holders
2. X1 Drum Key
3. X1 Snare Metal Rod (165mm)
4. X1 Pair Drumsticks
5. X2 Handscrew
6. X4 Tom & Module Metal Rod (110mm)
7. X1 AC Adaptor
8. Owner's Manual
9. Setup Guide
10. X9 Connection Cables

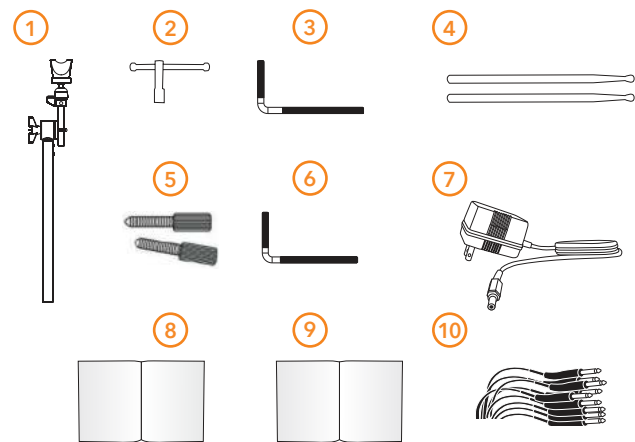

STAND AND CYMBAL HOLDER BOX


1. X6 Holder Clamp
2. Left Side Arm
3. Right Side Arm
4. Center Pipe
5. Left Pillar
6. Right Pillar

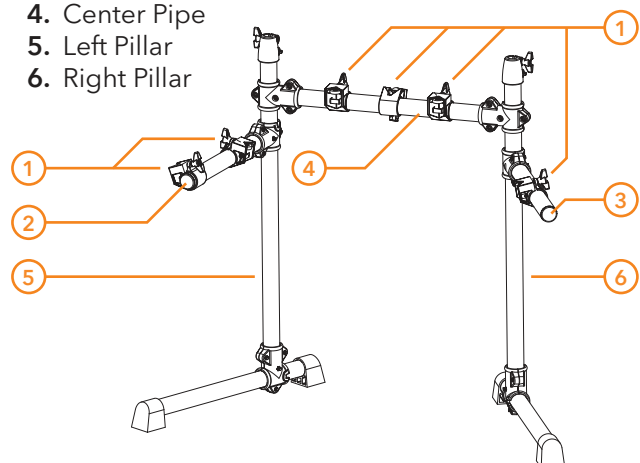

ATTACH THE PARTS




ATTACH THE PADS

1. Loosen wing nut on the holder clamp, which is on the left and right side arm.
2. Insert the Snare L-metal rod into the holder clamp on the left side arm, then insert the Tom & Module L-metal rod into the holder clamp on the center pipe and right side arm. Tighten wing nuts on the holder clamp.
3. Attach drum pads to the Snare L-Metal rod and the Tom & Module L-Metal rods then tighten wing nuts. Repeat for each pad.

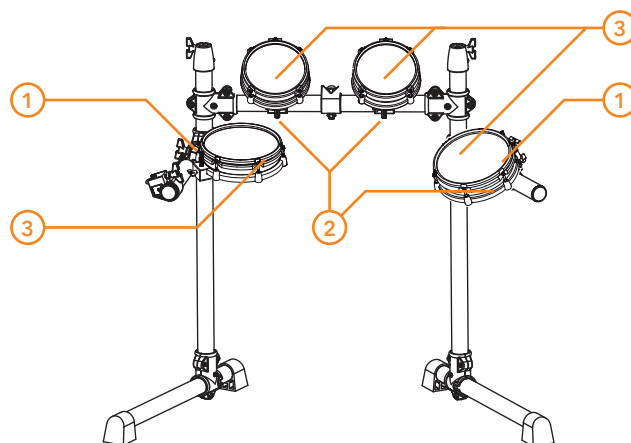

ATTACH THE CYMBAL PADS


1. Loosen wing nut on the holder clamp on left pillar, right pillar, left side arm.
2. Insert each cymbal holder into left pillar, right pillar, left side arm and tighten wing nut.
3. Remove wing nut and felt washer from cymbal holder.
4. Place cymbal pad on tilter assembly. Re-attach the felt washer and wing nut. Tighten wing nut.

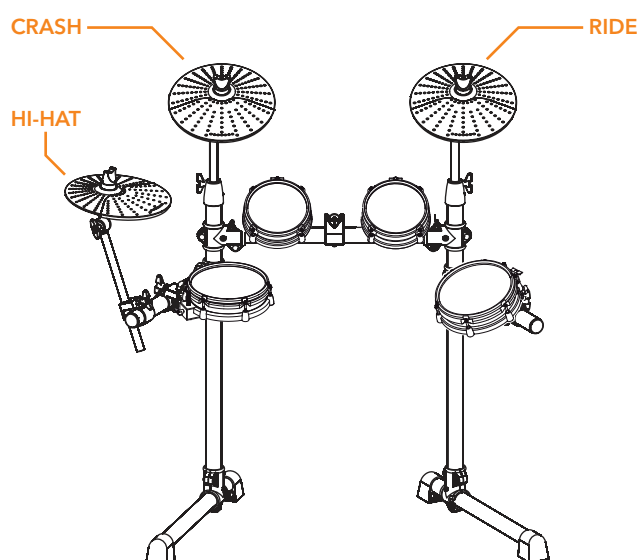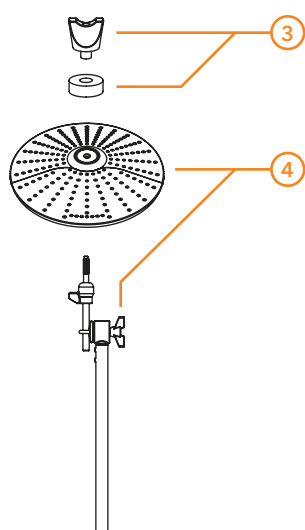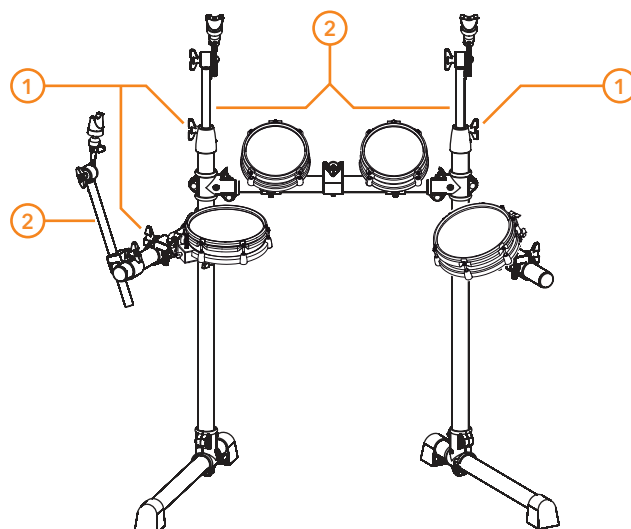

DRUM MODULE

ATTACH THE DRUM MODULE


1. Loosen wing nut on the center pipe clamp.
2. Insert the L-metal rod into the clamp.
3. Place the drum module onto the L-metal rod.
4. Tighten the wing nut on the clamp.

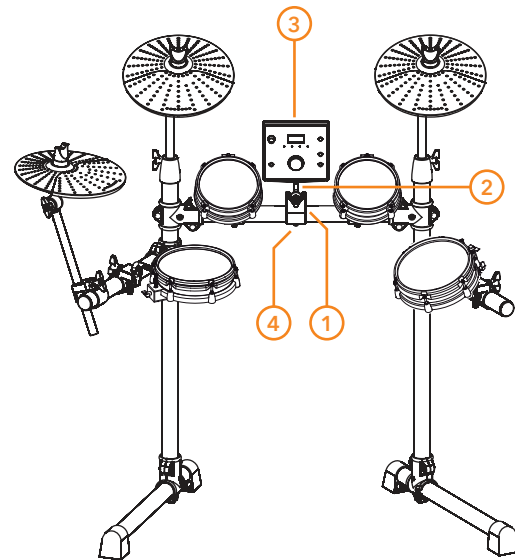

CONNECTION PROCEDURE

1. Place the pedal on the floor on your left side.
2. Place the bass drum pedal on the floor in the center of rack.
3. Please connect the clearly marked cables from the pads to the correct inputs on the drum module.

- CRASH 1
- CRASH 2
- HI-HAT
- TOM 1
- SNARE
- HI-HAT PEDAL
- BASS PEDAL
- TOM 3
- TOM 2

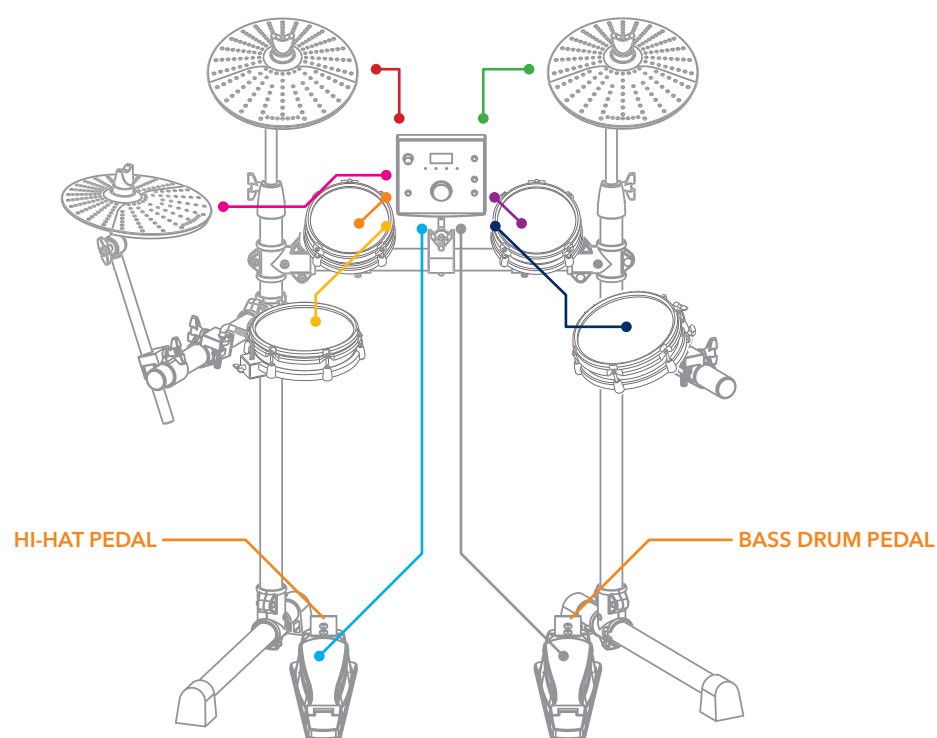



If you have any more questions about this product, please do not hesitate to contact the Gear4music Customer Service Team on: **+44 (0) 330 365 4444** or **info@gear4music.com**