



Sena WiFi Docking Station Quick Start Guide

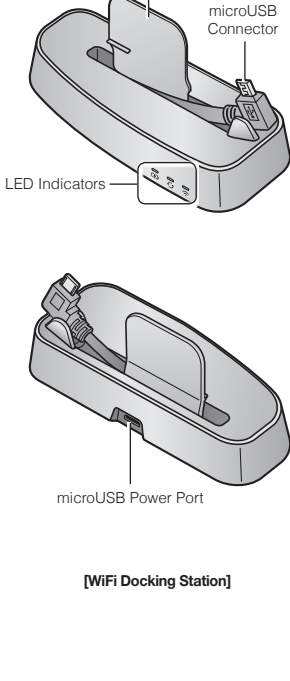

[WiFi Docking Station]

1

17.Nov




[USB Power and Data Cable]

[World Wide USB Wall Charger]

Notice:

Please use the USB Power and Data Cable and the World Wide USB Wall Charger included in the package or a compatible third-party microUSB cable (5V and higher than 1A) with the WiFi Docking Station. Do not connect the WiFi Docking Station to a USB port on your PC.

LED Description



2

Charging Status

- Disconnected
- Charging (Main unit is powered off)
- Fully charged

Note:

Charging (Main unit is powered on).
To upgrade the firmware, power off the main unit.

Firmware Upgrade Status

- Disconnected or no firmware upgrade available
- Upgrading firmware
- Firmware upgrade completed

WiFi Status

- Disconnected from an WiFi access point
- Searching for WiFi access point
- Connected to an access point


3

Powering On

- Insert the USB Power and Data Cable into the microUSB Power Port.

Attaching a Main Unit

Connect the main unit to the microUSB cable and attach it to the WiFi Docking Station. Before connecting the main unit, power off the unit.




Note:

If you leave the main unit on when connecting it, the charging LED on the WiFi Docking Station will blink red slowly.

4

Connection Setup

- Open the 30K Utility App.
- Click the menu button  and select the "WiFi Docking Station" menu.

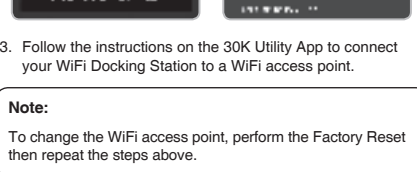

- Follow the instructions on the 30K Utility App to connect your WiFi Docking Station to a WiFi access point.

Note:

To change the WiFi access point, perform the Factory Reset then repeat the steps above.

Upgrading the Firmware of a Main Unit

The firmware will be upgraded automatically while your main unit is charging. If you want to manually upgrade the firmware, change the setting on the 30K Utility App.

Note:

Do not unplug the USB Power and Data Cable from the WiFi Docking Station while upgrading the firmware. The product may be damaged.

5

Factory Reset

If you want to restore the WiFi Docking Station to the factory default settings, you can easily reset the unit:

- Locate the pinhole reset button on the unit.
- Gently insert a paperclip into the hole and tap the **Factory Reset Button** with light pressure.
- The WiFi Docking Station will automatically restart with the three LEDs on.



Note:

The WiFi Docking Station will be restored to factory default settings which include the WiFi configuration setup, the firmware setup and the language setup.