




DOMUS LINE
LIGHT STYLE

EN

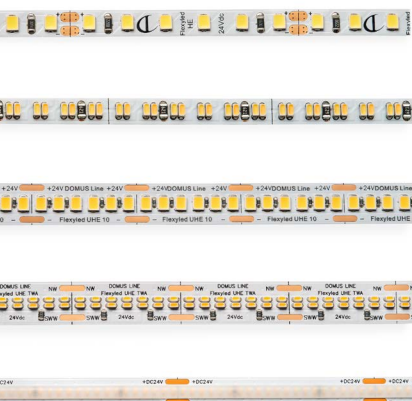

FLEXYLED DIY



FLEXYLED DIY

Flexible and configurable LED modules for integration into profiles and micro-profiles

Tailor-made light, designed for every project. The FLEXYLED DIY collection by Domus Line offers a complete range of flexible linear LED modules, developed for precise and discreet integration into profiles and micro-profiles, including fixtures with removable diffuser screens.

Available in dimmable single-colour, dual-colour D-Motion, or dual-colour D-Motion Wave versions (with progressive switch-on and reverse sequence switch-off), the FLEXYLED DIY modules are built on LED strips ranging from 6 to 10 mm in width. Depending on the model, they can be installed by sliding into place or using an adhesive base. The 6 mm LED strips are compatible with Plug&Play CH6 and CC6 connection systems.



All versions are available in 10 or 20-meter reels without power cables or, upon request, as Prewired (PW) modules in customized lengths, complete with a 2000 mm cable and Micro24 male connector. The light sources can be cut into regular segments—depending on the model—to provide maximum freedom of configuration.

The collection includes high-density LED modules that ensure continuous, homogeneous lighting without visible interruptions, with solutions offering up to 504 LEDs per meter. Every light source is designed to precisely meet increasingly advanced lighting and aesthetic requirements.

FLEXYLED DIY is the ideal solution for those seeking versatile, high-performance light sources that can be invisibly integrated and adapt to various shapes, functions, and atmospheres. A collection designed to illuminate with intelligence, precision, and freedom.



INDEX

FLEXYLED HE6B PRO	8
FLEXYLED HE6 D-MWA	7
FLEXYLED HE6 D-MWA	9
FLEXYLED HE6 PRO	6
FLEXYLED HE8B	27
FLEXYLED SHE6B D-M	13
FLEXYLED SHE6B PRO	12
FLEXYLED SHE6 D-M	11
FLEXYLED SHE6 PRO	10
FLEXYLED SHE6 SE	14
FLEXYLED SHEP6B D-M	15
FLEXYLED SHEP6B EVO	17
FLEXYLED SHEP6 EVO	16
FLEXYLED UHE10B	28
FLEXYLED UHE10B D-M	29
FLEXYLED UHE6	18
FLEXYLED UHE6B	19
FLEXYLED UHE6B CSP	21
FLEXYLED UHE6B CSP D-M	22
FLEXYLED UHE6B ES	25
FLEXYLED UHE6 CSP D-M	20
FLEXYLED UHE6 D-MWA	23
FLEXYLED UHE6 ES	24
FLEXYLED UHEP6 CSP	26



FLEXYLED HE6 PRO

flexible linear LED reel without cable


Lenght	Watt	Volt
10m	9,6W/m	24VDC



FLEXYLED HE6 PRO PW

flexible linear LED module with cable



Lenght	Watt	Volt
on request	9,6W/m	24VDC

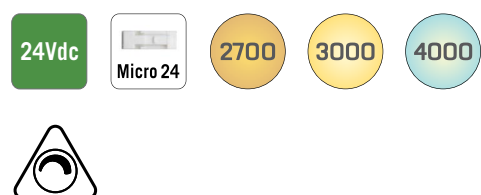

FLEXYLED HE6 PRO is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED HE6 PRO PW can be configured in custom-length modules in multiples of 50mm (6 LEDs, 0.48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1020 lm/m	1020 lm/m	1020 lm/m
Luminous efficiency	106 lm/W	106 lm/W	106 lm/W
CRI	Ra 80	Ra 80	Ra 80

FLEXYLED HE6 PRO

single-colour LED light source

FLEXYLED HE6 PRO is a dimmable single-colour light source developed on a 6mm-wide flexible linear module with 120 LEDs/m, designed to be integrated “by sliding” into micro diffuser profiles. The source, divisible every 50mm (6 LEDs), is supplied without adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED HE6 PRO is available in 10m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED HE6 PRO PW). Power supply not included, to be ordered separately.





FLEXYLED HE6 D-MWA

flexible linear LED reel without cable

Lenght	Watt	Volt
10m	9,6W/m	24VDC



FLEXYLED HE6 D-MWA PW



flexible linear LED module with cable

Lenght	Watt	Volt
on request	9,6W/m	24VDC



FLEXYLED HE6 D-MWA PW can be configured in custom-length modules in multiples of 50mm (6+6 LEDs, 0.48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.

FLEXYLED HE6 D-MWA and FLEXYLED HE6 D-MWA PW must be controlled with a compatible D-Motion Wave control system.



Colour appearance	white D-Motion Wave
Colour temperature	2700 - 4000 K
Luminous flux	1054 lm/m
Luminous efficiency	110 lm/W
CRI	Ra 81

FLEXYLED HE6 D-MWA



dual colour wave LED light source

FLEXYLED HE6 D-Motion Wave is a dimmable dual colour light source with progressive switching on and switching off in reverse sequence, developed on a 6mm-wide flexible linear module with 120+120 LEDs/m, designed to be integrated "by sliding" into micro profiles. The light source, divisible every 50mm (6+6 LEDs), is supplied without adhesive base and is only compatible with D-Motion Wave control systems. FLEXYLED HE6 D-MWA is available in 10m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED HE6 D-MWA PW). Power supply not included, to be ordered separately.





FLEXYLED HE6B PRO

flexible linear LED reel without cable


Lenght	Watt	Volt
10m	9,6W/m	24VDC



FLEXYLED HE6B PRO PW

flexible linear LED module with cable



Lenght	Watt	Volt
on request	9,6W/m	24VDC

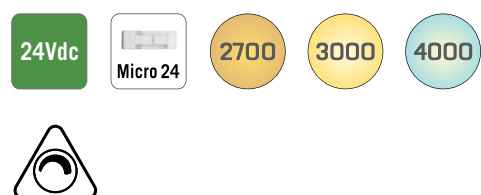

FLEXYLED HE6B PRO is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED HE6B PRO PW can be configured in custom-length modules in multiples of 50mm (6 LED 0,48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1020 lm/m	1020 lm/m	1020 lm/m
Luminous efficiency	106 lm/W	106 lm/W	106 lm/W
CRI	Ra 80	Ra 80	Ra 80

FLEXYLED HE6B PRO

single colour LED light source

FLEXYLED HE6B PRO is a dimmable single-colour light source developed on a 6mm-wide linear flexible module with 120 LEDs/m, designed for installation in micro profiles with a removable diffuser. The source, divisible every 50mm (6 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED HE6B PRO is available in 10m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED HE6B PRO PW). Power supply not included, to be ordered separately.





FLEXYLED HE6B D-MWA

flexible linear LED reel without cable

Lenght	Watt	Volt
10m	9,6W/m	24VDC



FLEXYLED HE6B D-MWA PW



flexible linear LED module with cable

Lenght	Watt	Volt
on request	9,6W/m	24VDC



FLEXYLED HE6B D-MWA PW can be configured in custom-length modules in multiples of 50mm (6+6 LEDs, 0.48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.

FLEXYLED HE6B D-MWA and HE6B D-MWA PW must be controlled with a compatible D-Motion Wave control system.



Colour appearance	white D-Motion Wave
Colour temperature	2700 - 4000 K
Luminous flux	1054 lm/m
Luminous efficiency	110 lm/W
CRI	Ra 81

FLEXYLED HE6B D-MWA



dual colour wave LED light source

FLEXYLED HE6B D-Motion Wave is a dimmable dual colour light source with progressive switching on and switching off in reverse sequence, developed on a 6mm-wide flexible linear module with 120+120 LEDs/m, designed for installation in micro profiles with a removable diffuser. The light source, divisible every 50mm (6+6 LEDs), is supplied with an adhesive base and is only compatible with D-Motion Wave control systems. FLEXYLED HE6B D-MWA is available in 10m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED HE6B D-MWA PW). Power supply not included, to be ordered separately.





FLEXYLED SHE6 PRO

flexible linear LED reel without cable

Length	Watt	Volt
10m	14,4W/m	24VDC



FLEXYLED SHE6 PRO PW

flexible linear LED module with cable



Length	Watt	Volt
on request	14,4W/m	24VDC



FLEXYLED SHE6 PRO is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED SHE6 PRO PW can be configured in custom-length modules in multiples of 33.3mm (6 LEDs, 0.48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Apparent colour	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1420 lm/m	1420 lm/m	1420 lm/m
Luminous efficiency	99 lm/W	99 lm/W	99 lm/W
CRI	Ra 80	Ra 80	Ra 80

FLEXYLED SHE6 PRO



single colour LED light source

FLEXYLED SHE6 PRO is a dimmable single colour light source developed on a 6mm-wide flexible linear module with 180 LEDs/m, designed to be integrated “by sliding” into micro profiles. The light source, divisible every 33.3mm (6 LEDs), is supplied without adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHE6 PRO is available in 10m reels without the power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHE6 PRO PW). Power supply not included, to be ordered separately.





FLEXYLED SHE6 D-M

flexible linear LED reel without cable

Length	Watt	Volt
20m	10W/m	24VDC



FLEXYLED SHE6 D-M PW

flexible linear LED module with cable



Length	Watt	Volt
on request	10W/m	24VDC



FLEXYLED SHE6 D-M is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED SHE6 D-M PW can be configured in custom-length modules in multiples of 41,7mm (7+7 LEDs, 0.42W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	white D-Motion
Colour temperature	2700 - 4000 K
Luminous flux	780 lm/m
Luminous efficiency	78 lm/W
CRI	Ra 90

FLEXYLED SHE6 D-M



dual colour LED light source

FLEXYLED SHE6 D-Motion is a dimmable dual-colour light source developed on a 6mm-wide flexible linear module with 168+168 LEDs/m, designed to be integrated “by sliding” into micro profiles. The light source, divisible every 41.7mm (7+7 LEDs), is supplied without an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHE6 D-M is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHE6 D-M PW). Power supply not included, to be ordered separately.





FLEXYLED SHE6B PRO

flexible linear LED reel without cable

Length	Watt	Volt
10m	14,4W/m	24VDC



FLEXYLED SHE6B PRO PW

flexible linear LED module with cable



Length	Watt	Volt
on request	14,4W/m	24VDC



FLEXYLED SHE6B PRO is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED SHE6B PRO PW can be configured in custom-length modules in multiples of 33.3mm (6 LEDs, 0.48W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Apparent colour	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1420 lm/m	1420 lm/m	1420 lm/m
Luminous efficiency	99 lm/W	99 lm/W	99 lm/W
CRI	Ra 80	Ra 80	Ra 80

FLEXYLED SHE6B PRO



single colour LED light source

FLEXYLED SHE6B PRO is a dimmable single colour light source developed on a 6mm-wide flexible linear module with 180 LEDs/m, designed for installation in micro profiles with a removable screen diffuser. The light source, divisible every 33.3mm (6 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHE6B PRO is available in 10m reels without the power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHE6B PRO PW). Power supply not included, to be ordered separately.





FLEXYLED SHE6B D-M

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	10W/m	24VDC



FLEXYLED SHE6B D-M PW

flexible linear LED module with cable



Lenght	Watt	Volt
on request	10W/m	24VDC



FLEXYLED SHE6B D-M is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED SHE6B D-M PW can be configured in custom-length modules in multiples of 41,7mm (7+7 LEDs, 0.42W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	D-Motion white
Colour temperature	2700 - 4000 K
Luminous flux	780 lm/m
Luminous efficiency	78 lm/W
CRI	Ra 90

FLEXYLED SHE6B D-M



dual colour LED light source

FLEXYLED SHE6B D-Motion is a dimmable dual-colour light source developed on a 6mm-wide linear flexible module with 168+168 LEDs/m, designed for installation in micro profiles with a removable diffuser. The light source, divisible every 41.7mm (7+7 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHE6B D-M is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHE6B D-M PW). Power supply not included, to be ordered separately.





FLEXYLED SHE6 SE

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	10W/m	24VDC

24Vdc

2900

3200

4300



FLEXYLED SHE6 SE PW

flexible linear LED module with cable

Lenght	Watt	Volt
on request	10W/m	24VDC

24Vdc

Micro 24



2900

3200

4300



FLEXYLED SHE6 SE PW can be configured in custom-length modules in multiples of 33,3mm (6 LEDs, 0.33W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	super warm white	warm white	natural white
Colour temperature	2900 K	3200 K	4300 K
Luminous flux	1000 lm/m	1000 lm/m	1000 lm/m
Luminous efficiency	100 lm/W	100 lm/W	100 lm/W
CRI	Ra 83	Ra 80	Ra 80

FLEXYLED SHE6 SE



single colour LED light source

FLEXYLED SHE6 SE is a dimmable single-colour side-emitting light source developed on a 6mm-wide flexible linear module with 180 LEDs/m, designed to be integrated “by sliding” into SE (Side Emitting) micro profiles. The source, divisible every 33.3mm (6 LEDs), is supplied without an adhesive base. FLEXYLED SHE6 SE is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHE6 SE PW). Power supply not included, to be ordered separately.





FLEXYLED SHEP6B D-M

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	10W/m	24VDC



FLEXYLED SHEP6B D-M PW

flexible linear LED module with cable



Lenght	Watt	Volt
on request	10W/m	24VDC



FLEXYLED SHEP6B D-M is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED SHEP6B D-M PW can be configured in custom-length modules in multiples of 29,4mm (6+6 LEDs, 0.29W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	white D-Motion
Colour temperature	3000 - 4000 K
Luminous flux	1000 lm/m
Luminous efficiency	100 lm/W
CRI	Ra 90

FLEXYLED SHEP6B D-M



dual colour LED light source

FLEXYLED SHEP6B D-Motion is a dimmable dual-colour light source developed on a 6mm-wide linear flexible module with 204+204 LEDs/m, designed for installation in micro profiles with a removable diffuser. The source, divisible every 29.4mm (6+6 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHEP6B D-M is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHEP6B D-M PW). Power supply not included, to be ordered separately.





FLEXYLED SHEP6 EVO

flexible linear LED reel without cable

Lenght	Watt	Volt
10m	5,6W/m	24VDC

24Vdc

2700

3000

4000



FLEXYLED SHEP6 EVO PW

flexible linear LED module with cable

Lenght	Watt	Volt
upon request	5,6W/m	24VDC

24Vdc

Micro 24

2700

3000



4000



FLEXYLED SHEP6 EVO is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED SHEP6 EVO PW can be configured in custom-length modules in multiples of 41,7mm (9 LEDs, 0.23W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



values referred to
SHEP6 EVO 1000mm 4000K

Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1040 lm/m	1040 lm/m	1100 lm/m
Luminous efficiency	186 lm/W	186 lm/W	196 lm/W
CRI	Ra 85	Ra 85	Ra 85

FLEXYLED SHEP6 EVO



single colour LED light source

FLEXYLED SHEP6 EVO is a dimmable single colour light source developed on a 6mm-wide flexible linear module with 216 LEDs/m, designed to be integrated "by sliding" into micro profiles. The light source, divisible every 41.7mm (9 LEDs), is supplied without adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHEP6 EVO is available in 10m reels without the power cable or, on request, in custom-length module with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHEP6 EVO PW). Power supply not included, to be ordered separately.



energy efficiency class referring
to CCT 4000 K



energy efficiency class referring
to CCT 2700 K and 3000 K



FLEXYLED SHEP6B EVO

flexible linear LED reel without cable

Length	Watt	Volt
10m	5,6W/m	24VDC



FLEXYLED SHEP6B EVO PW

flexible linear LED module with cable



Length	Watt	Volt
upon request	5,6W/m	24VDC



FLEXYLED SHEP6B EVO is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED SHEP6B EVO PW can be configured in custom-length modules in multiples of 41,7mm (9 LEDs, 0.23W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



values referred to
SHEP6B EVO 1000mm 4000K

Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	1040 lm/m	1040 lm/m	1100 lm/m
Luminous efficiency	186 lm/W	186 lm/W	196 lm/W
CRI	Ra 85	Ra 85	Ra 85

FLEXYLED SHEP6B EVO



single colour LED light source

FLEXYLED SHEP6B EVO is a dimmable single colour light source developed on a 6mm-wide linear flexible module with 216 LEDs/m, designed for installation in micro profiles with a removable screen diffuser. The light source, divisible every 41.7mm (9 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED SHEP6B EVO is available in 10m reels without the power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED SHEP6 EVO PW). Power supply not included, to be ordered separately.



energy efficiency class referring
to CCT 4000 K



energy efficiency class referring
to CCT 2700 K e 3000 K



FLEXYLED UHE6

flexible linear LED reel without cable

Length	Watt	Volt
20m	10W/m	24VDC

24Vdc

2700

3100

4200



FLEXYLED UHE6 PW

flexible linear LED module with cable

Length	Watt	Volt
upon request	10W/m	24VDC

24Vdc

Micro 24

2700

3100


4200



FLEXYLED UHE6 is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED UHE6 PW can be configured in custom-length modules in multiples of 25mm (7 LEDs, 0.25W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



values referred to
UHE6 1000mm 4200 K


Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3100 K	4200 K
Luminous flux	910 lm/m	940 lm/m	980 lm/m
Luminous efficiency	91 lm/W	94 lm/W	98 lm/W
CRI	Ra 90	Ra 90	Ra 90

FLEXYLED UHE6



single colour LED light source

FLEXYLED UHE6 a dimmable single colour light source developed on a 6mm-wide flexible linear module with 280 LEDs/m, designed to be integrated "by sliding" into micro profiles. The light source, divisible every 25mm (7 LEDs), is supplied without adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6 is available in 20m reels without the power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6 PW). Power supply not included, to be ordered separately.



energy efficiency class referring
to CCT 3100 K and 4200 K



energy efficiency class referring
to CCT 2700 K



FLEXYLED UHE6B

flexible linear LED reel without cable

Length	Watt	Volt
20m	10W/m	24VDC

24Vdc

2700

3100

4200



FLEXYLED UHE6B PW

flexible linear LED module with cable

Length	Watt	Volt
upon request	10W/m	24VDC

24Vdc

Micro 24

2700

3100



4200



FLEXYLED UHE6B is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED UHE6B PW can be configured in custom-length modules in multiples of 25mm (7 LEDs, 0.25W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.




Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3100 K	4200 K
Luminous flux	910 lm/m	940 lm/m	980 lm/m
Luminous efficiency	91 lm/W	94 lm/W	98 lm/W
CRI	Ra 90	Ra 90	Ra 90

FLEXYLED UHE6B



single colour LED light source

FLEXYLED UHE6B is a dimmable single colour light source developed on a 6mm-wide linear flexible module with 280 LEDs/m, designed for installation in micro profiles with a removable screen diffuser. The light source, divisible every 25mm (7 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6 is available in 20m reels without the power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6B PW). Power supply not included, to be ordered separately.



energy efficiency class referring to CCT 3100 K and 4200 K



energy efficiency class referring to CCT 2700 K



FLEXYLED UHE6 CSP D-M

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	10W/m	24VDC



FLEXYLED UHE6 CSP D-M PW

flexible linear LED module with cable


Lenght	Watt	Volt
on request	10W/m	24VDC



FLEXYLED UHE6 CSP D-M is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED UHE6 CSP D-M PW can be configured in custom-length modules in multiples of 26,3mm (8+8 LEDs, 0.26W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



values referred to
UHE6 CSP D-M 1000mm

Colour appearance	white D-Motion	white D-Motion
Colour temperature	2700 - 4000 K	3000 - 4000 K
Luminous flux	968 lm/m	968 lm/m
Luminous efficiency	97 lm/W	97 lm/W
CRI	Ra 92	Ra 92

FLEXYLED UHE6 CSP D-M



dual colour LED light source

FLEXYLED UHE6 CSP D-Motion is a dimmable dual-colour Chip Scale Packaged light source developed on a 6mm-wide flexible linear module with 304+304 LEDs/m, designed to be integrated "by sliding" into micro profiles. The light source, divisible every 26.3mm (8+8 LEDs), is supplied without an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6 CSP D-M is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6 CSP D-M PW). Power supply not included, to be ordered separately.





FLEXYLED UHE6B CSP

flexible linear LED roll without cable

Lenght	Watt	Volt
20m	10W/m	24VDC



FLEXYLED UHE6B CSP PW

flexible linear LED module with cable


Lenght	Watt	Volt
on request	10W/m	24VDC



FLEXYLED UHE6B CSP is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED UHE6B CSP PW can be configured in custom-length modules in multiples of 26,3mm (8 LEDs, 0.26W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	warm white	natural white
Colour temperature	3000 K	4000 K
Luminous flux	800 lm/m	800 lm/m
Luminous efficiency	80 lm/W	80 lm/W
CRI	Ra 90	Ra 90

FLEXYLED UHE6B CSP

single colour LED light source



FLEXYLED UHE6B CSP is a dimmable single-colour Chip Scale Packaged light source developed on a 6mm-wide flexible linear module with 304+304 LEDs/m, designed for installation in micro profiles with a removable diffuser. The light source, divisible every 26.3mm (8+8 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6B CSP is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6B CSP PW). Power supply not included, to be ordered separately.





FLEXYLED UHE6B CSP D-M

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	10W/m	24VDC



FLEXYLED UHE6B CSP D-M PW

flexible linear LED module with cable


Lenght	Watt	Volt
on request	10W/m	24VDC



FLEXYLED UHE6B CSP D-M is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED UHE6B CSP D-M PW can be configured in custom-length modules in multiples of 26,3mm (8+8 LEDs, 0.26W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	white D-Motion
Colour temperature	2700 - 4000 K
Luminous flux	968 lm/m
Luminous efficiency	97 lm/W
CRI	Ra 92

FLEXYLED UHE6B CSP D-M

dual colour LED light source



FLEXYLED UHE6B CSP D-Motion is a dimmable dual-colour Chip Scale Packaged light source developed on a 6mm-wide flexible linear module with 304 +304 LEDs/m, designed for installation in micro profiles with a removable diffuser. The light source, divisible every 26.3mm (8+8 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6B CSP D-M is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6B CSP D-M PW). Power supply not included, to be ordered separately.





FLEXYLED UHE6 D-MWA

flexible linear LED reel without cable

Lenght	Watt	Volt
10m	9,6W/m	24VDC



FLEXYLED UHE6 D-MWA PW



flexible linear LED module with cable

Lenght	Watt	Volt
on request	9,6W/m	24VDC



FLEXYLED UHE6 D-MWA PW can be configured in custom-length modules in multiples of 25mm (6+6 LED 0.24W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.

FLEXYLED UHE6 D-MWA and UHE6 D-MWA PW must be controlled with a compatible D-Motion Wave control system.



values referred to
UHE6 D-MWA 1000mm


Colour appearance	white D-Motion Wave
Colour temperature	2700 - 4000 K
Luminous flux	1100 lm/m
Luminous efficiency	115 lm/W
CRI	Ra 83

FLEXYLED UHE6 D-MWA



dual colour wave LED light source

FLEXYLED UHE6 D-Motion Wave is a dimmable dual colour light source with progressive switching on and switching off in reverse sequence, developed on a 6mm-wide dual layer flexible linear module with 240+240 LEDs/m, designed to be integrated "by sliding" into micro profiles. The source, divisible every 25mm (6+6 LEDs), is supplied without an adhesive base and is only compatible with D-Motion Wave control systems. FLEXYLED UHE6 D-MWA is available in 10m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6 D-MWA PW). Power supply not included, to be ordered separately.

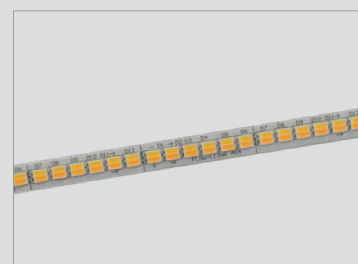



FLEXYLED UHE6 ES

flexible linear LED roll without cable

Lenght	Watt	Volt
20m	5,8W/m	24VDC

24Vdc

2700

3000

4000



FLEXYLED UHE6 ES PW

flexible linear LED module with cable

Lenght	Watt	Volt
on request	5,8W/m	24VDC

24Vdc

Micro 24

2700

3000



4000



FLEXYLED UHE6 ES is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED UHE6 ES PW can be configured in custom-length modules in multiples of 25mm (7 LEDs, 0.15W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	640 lm/m	640 lm/m	700 lm/m
Luminous efficiency	110 lm/W	110 lm/W	121 lm/W
CRI	Ra 93	Ra 93	Ra 93

FLEXYLED UHE6 ES

single colour LED light source



FLEXYLED UHE6 ES is a dimmable single-colour light source developed on a 6mm-wide flexible linear module with 280 LEDs/m, designed to be integrated “by sliding” into micro profiles. The source, divisible every 25mm (7 LEDs), is supplied without an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6 ES is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6 ES PW). Power supply not included, to be ordered separately.



energy efficiency class referring
to CCT 3000 K and 4000 K



energy efficiency class referring
to CCT 2700 K



FLEXYLED UHE6B ES

flexible linear LED reel without cable

Length	Watt	Volt
20m	5,8W/m	24VDC

24Vdc

2700

3000

4000



FLEXYLED UHE6B ES PW

flexible linear LED module with cable

Length	Watt	Volt
on request	5,8W/m	24VDC

24Vdc

Micro 24

2700

3000



4000



FLEXYLED UHE6B ES is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, refer to the catalogue sheets.



FLEXYLED UHE6B ES PW can be configured in custom-length modules in multiples of 25mm (7 LEDs, 0.15W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	640 lm/m	640 lm/m	700 lm/m
Luminous efficiency	110 lm/W	110 lm/W	121 lm/W
CRI	Ra 93	Ra 93	Ra 93

FLEXYLED UHE6B ES

single colour LED light source

FLEXYLED UHE6B ES is a dimmable single-colour light source developed on a 6mm-wide flexible linear module with 280 LEDs/m, designed for installation in micro profiles with a removable diffuser. The source, divisible every 25mm (7 LEDs), is supplied with an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHE6B ES is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE6B ES PW). Power supply not included, to be ordered separately.



energy efficiency class referring to CCT 3000 K and 4000 K



energy efficiency class referring to CCT 2700 K



FLEXYLED UHEP6 CSP

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	9,6W/m	24VDC



FLEXYLED UHEP6 CSP PW

flexible linear LED module with cable


Lenght	Watt	Volt
on request	9,6W/m	24VDC



FLEXYLED UHEP6 CSP is compatible with the Plug&Play CH6 and CC6 connection systems. For more details, please refer to the catalogue sheets.



FLEXYLED UHEP6 CSP PW can be configured in custom-length modules in multiples of 41,7 mm (21 LEDs, 0.4W) up to a maximum of 5000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	warm white
Colour temperature	3000 K
Luminous flux	964 lm/m
Luminous efficiency	96 lm/W
CRI	Ra 90

FLEXYLED UHEP6 CSP



single colour LED light source

FLEXYLED UHEP6 CSP a dimmable single-colour Chip Scale Packaged light source developed on a 6mm-wide flexible linear module with 504 LEDs/m, designed to be integrated “by sliding” into micro profiles. The source, divisible every 41.7mm (21 LEDs), is supplied without an adhesive base and is compatible with the CH6 and CC6 Plug&Play connection systems. FLEXYLED UHEP6 CSP is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHEP6 CSP PW). Power supply not included, to be ordered separately.





FLEXYLED HE8B

flexible linear LED reel without cable

Length	Watt	Volt
20m	9,6 W/m	24VDC





FLEXYLED HE8B PW

flexible linear LED module with cable

Length	Watt	Volt
upon request	9,6 W/m	24VDC



FLEXYLED HE8B PW can be configured in custom-length modules in multiples of 50mm (6 LEDs, 0.48W) up to a maximum of 6000mm, with a 2000mm power cable and Micro24 male connector.




Colour appearance	super warm white	warm white	natural white
Colour temperature	2700 K	3000 K	4000 K
Luminous flux	820 lm/m	840 lm/m	880 lm/m
Luminous efficiency	85 lm/W	87 lm/W	92 lm/W
CRI	Ra 90	Ra 90	Ra 90

FLEXYLED HE8B

single colour LED light source

FLEXYLED HE8B is a dimmable single-colour light source developed on a 8mm-wide linear flexible module with 120 LEDs/m, designed for installation in profiles with a removable diffuser screen. The source, divisible every 50mm (6 LEDs), is supplied with an adhesive base. FLEXYLED HE8B is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED HE8B PW). Power supply not included, to be ordered separately.





FLEXYLED UHE10B

flexible linear LED reel without cable

Length	Watt	Volt
20m	19,2W/m	24VDC

24Vdc

3000



FLEXYLED UHE10B PW

flexible linear LED module with cable

Length	Watt	Volt
upon request	19,2W/m	24VDC



24Vdc

Micro 24

3000



FLEXYLED UHE10B PW can be configured in custom-length modules in multiples of 25mm (6 LEDs, 0.48W) up to a maximum of 6000mm, with a 2000mm power cable and Micro24 male connector.




Colour appearance	warm white
Colour temperature	3000 K
Luminous flux	1820 lm/m
Luminous efficiency	95 lm/W
CRI	Ra 90

FLEXYLED UHE10B



single colour LED light source

FLEXYLED UHE10B a dimmable single-colour light source developed on a 10mm-wide flexible linear module with 240 LEDs/m, designed for installation in profiles with a removable diffuser. The source, divisible every 25mm (6 LEDs), is supplied with an adhesive base. FLEXYLED UHE10B is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE10B PW). Power supply not included, to be ordered separately.





FLEXYLED UHE10B D-M

flexible linear LED reel without cable

Lenght	Watt	Volt
20m	19,2W/m	24VDC




FLEXYLED UHE10B D-M PW

flexible linear LED module with cable

Lenght	Watt	Volt
on request	19,2W/m	24VDC



FLEXYLED UHE10B D-M PW can be configured in custom-length modules in multiples of 25mm (7+7 LEDs, 0.48W) up to a maximum of 6000mm, with a 2000mm power cable and Micro24 male connector.



Colour appearance	white D-Motion
Colour temperature	2700 - 4000 K
Luminous flux	1820 lm/m
Luminous efficiency	95 lm/W
CRI	Ra 90

FLEXYLED UHE10B D-M



dual colour LED light source

FLEXYLED UHE10B D-Motion is a dimmable dual-colour light source developed on a 10mm-wide linear flexible module with 280+280 LEDs/m, designed for installation in profiles with a removable diffuser. The source, divisible every 25mm (7+7 LEDs), is supplied with an adhesive base. FLEXYLED UHE10B D-M is available in 20m reels without a power cable or, on request, in custom-length modules with a 2000mm power cable and a Micro24 male connector (FLEXYLED UHE10B D-M PW). Power supply not included, to be ordered separately.



HE6 PRO

Code	Description
1586701B1/SHE	FLEXYLED HE6 10m 9,6W/m 24Vdc SWW
1586701B/SHE	FLEXYLED HE6 10m 9,6W/m 24Vdc WW
1586701N/SHE	FLEXYLED HE6 10m 9,6W/m 24Vdc NW
1660901B1/0000	FLEXYLED HE6 PRO PW 0000mm 9,6W/m 24Vdc SWW
1660901B/0000	FLEXYLED HE6 PRO PW 0000mm 9,6W/m 24Vdc WW
1660901N/0000	FLEXYLED HE6 PRO PW 0000mm 9,6W/m 24Vdc NW

Legenda	
HE6	High Emission LED module on 6mm PCB without adhesive
PRO	Made in Italy
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

HE6 D-MWA

Code	Description
1655301/1000	FLEXYLED HE6 D-MWA 10m 9,6W/m 24Vdc
1655401/0000	FLEXYLED HE6 D-MWA PW 0000mm 9,6W/m 24Vdc

Legenda	
HE6	High Emission LEDs on 6mm PCB without adhesive base
D-MWA	Dual colour D-Motion Wave LED module
PW	Pre-wired power cable

HE6B PRO

Code	Description
F0029000002	FLEXYLED HE6B PRO 10m 9,6W/m 24Vdc SWW
F0029000001	FLEXYLED HE6B PRO 10m 9,6W/m 24Vdc WW
F0029000003	FLEXYLED HE6B PRO 10m 9,6W/m 24Vdc NW
1393201B1/0000	FLEXYLED HE6B PRO PW 0000mm 9,6W/m 24Vdc SWW
1393201B/0000	FLEXYLED HE6B PRO PW 0000mm 9,6W/m 24Vdc WW
1393201N/0000	FLEXYLED HE6B PRO PW 0000mm 9,6W/m 24Vdc NW

Legenda	
HE6B	High Emission LEDs on 6mm PCB with adhesive base
PRO	Made in Italy
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

HE6B D-MWA

Code	Description
F0091000001	FLEXYLED HE6B D-MWA 10m 9,6W/m 24Vdc
1655501/0000	FLEXYLED HE6B D-MWA PW 0000mm 9,6W/m 24Vdc

Legenda	
HE6B	High Emission LEDs on 6mm PCB with adhesive base
D-MWA	Dual colour D-Motion Wave LED module
PW	Pre-wired power cable

SHE6 PRO

Code	Description
1308301B1/SHE	FLEXYLED SHE6 PRO 10m 24Vdc 14,4W/m SWW
1308301B/SHE	FLEXYLED SHE6 PRO 10m 24Vdc 14,4W/m WW
1308301N/SHE	FLEXYLED SHE6 PRO 10m 24Vdc 14,4W/m NW
On request	FLEXYLED SHE6 PRO PW 0000mm 24Vdc 14,4W/m SWW
On request	FLEXYLED SHE6 PRO PW 0000mm 24Vdc 14,4W/m WW
On request	FLEXYLED SHE6 PRO PW 0000mm 24Vdc 14,4W/m NW

Legenda	
SHE6	Super High Emission 6mm PCB without adhesive base
PRO	Made in Italy
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

SHE6 D-M

Code	Description
1655601/2000	FLEXYLED SHE6 D-M 20m 10W/m 24Vdc
1563801/0000	FLEXYLED SHE6 D-M PW 0000mm 10W 24Vdc

Legenda	
SHE6	Super High Emission LEDs on 6mm PCB without adhesive base
PW	Pre-wired power cable
D-M	Dual colour D-Motion LED module

SHE6B PRO

Code	Description
1590701B1/SHE	FLEXYLED SHE6B PRO 10m 24Vdc 14,4W/m SWW
1590701B/SHE	FLEXYLED SHE6B PRO 10m 24Vdc 14,4W/m WW
1590701N/SHE	FLEXYLED SHE6B PRO 10m 24Vdc 14,4W/m NW
On request	FLEXYLED SHE6B PRO PW 0000mm 24Vdc 14,4W/m SWW
On request	FLEXYLED SHE6B PRO PW 0000mm 24Vdc 14,4W/m WW
On request	FLEXYLED SHE6B PRO PW 0000mm 24Vdc 14,4W/m NW

Legenda	
SHE6B	Super High Emission 6mm with tape
PRO	Made in Italy
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

SHE6B D-M

Code	Description
1552701/2000	FLEXYLED SHE6B D-M 20m 10W/m 24V
1660101/0000	FLEXYLED SHE6B D-M PW 0000mm 10W/m 24Vdc

Legenda	
SHE6B	Super High Emission LEDs on 6mm PCB with adhesive base
PW	Pre-wired power cable
D-M	Dual colour D-Motion LED module

SHE6 SE

Code	Description
1639301B1/2000	FLEXYLED SHE6 SE 20m 10W/m 24Vdc SWW
1639301B/2000	FLEXYLED SHE6 SE 20m 10W/m 24Vdc WW
639301N/2000	FLEXYLED SHE6 SE 20m 10W/m 24Vdc NW
1656301B1/0000	FLEXYLED SHE6 SE PW 0000mm 10W/m 24Vdc SWW
1656301B/0000	FLEXYLED SHE6 SE PW 0000mm 10W/m 24Vdc WW
1656301N/0000	FLEXYLED SHE6 SE PW 0000mm 10W/m 24Vdc NW

Legenda	
SHE6	Super High Emission 6mm PCB without adhesive base
SE	Side emitting LED module
PW	Pre-Wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

SHEP6B D-M

Code	Description
F0206000001	FLEXYLED SHEP6B D-M 20m 10W/m 24VDC
1605701/0000	FLEXYLED SHEP6B D-M PW 0000mm 10W/m 24VDC

Legenda	
SHEP6B	Super High Emission Plus LEDs on 6mm PCB with adhesive base
PW	Pre-wired power cable
D-M	Dual colour D-Motion LED module

SHEP6 EVO

Code	Description
F0298000014	FLEXYLED SHEP6 EVO 10m 24Vdc 5,6W/m SWW
F0298000015	FLEXYLED SHEP6 EVO 10m 24Vdc 5,6W/m WW
F0298000016	FLEXYLED SHEP6 EVO 10m 24Vdc 5,6W/m NW
1655701B1/0000	FLEXYLED SHEP6 EVO PW 0000mm 5,6W/m 24V SWW
1655701B/0000	FLEXYLED SHEP6 EVO PW 0000mm 5,6W/m 24V WW
1655701N/0000	FLEXYLED SHEP6 EVO PW 0000mm 5,6W/m 24V NW
Legenda	
SHEP6	Super High Emission Plus LEDs on 6mm PCB without adhesive base
EVO	High energy efficiency LED module (Evolution)
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

SHEP6B EVO

Code	Description
F0298000001	FLEXYLED SHEP6B EVO 10m 24Vdc 5,6W/m SWW
F0298000002	FLEXYLED SHEP6B EVO 10m 24Vdc 5,6W/m WW
F0298000003	FLEXYLED SHEP6B EVO 10m 24Vdc 5,6W/m NW
1655801B1/0000	FLEXYLED SHEP6B EVO PW 0000mm 5,6W/m 24Vdc SWW
1655801B/0000	FLEXYLED SHEP6B EVO PW 0000mm 5,6W/m 24Vdc WW
1655801N/0000	FLEXYLED SHEP6B EVO PW 0000mm 5,6W/m 24Vdc NW
Legenda	
SHEP6B	Super High Emission Plus LEDs on 6mm PCB with adhesive base
EVO	High energy efficiency LED module (Evolution)
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

UHE6

Code	Description
1656401B1/2000	FLEXYLED UHE6 20m 10W 24Vdc SWW
1656401B/2000	FLEXYLED UHE6 20m 10W 24Vdc WW
1656401N/2000	FLEXYLED UHE6 20m 10W 24Vdc NW
1349301B1/0000	FLEXYLED UHE6 PW 0000mm 10W/m 24Vdc SWW
1349301B/0000	FLEXYLED UHE6 PW 0000mm 10W/m 24Vdc WW
1349301N/0000	FLEXYLED UHE6 PW 0000mm 10W/m 24Vdc NW

Legenda	
UHE6	Ultra High Emission LEDs on 6mm PCB without adhesive base
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

UHE6

Code	Description
1394101B1/UHE/2000	FLEXYLED UHE6B 20m 10W/m 24Vdc SWW
1394101B/UHE/2000	FLEXYLED UHE6B 20m 10W/m 24Vdc WW
1394101N/UHE/2000	FLEXYLED UHE6B 20m 10W/m 24Vdc NW
1349701B1/0000	FLEXYLED UHE6B PW 0000mm 10W/m 24Vdc SWW
1349701B/0000	FLEXYLED UHE6B PW 0000mm 10W/m 24Vdc WW
1349701N/0000	FLEXYLED UHE6B PW 0000mm 10W/m 24Vdc NW

Legenda	
UHE6B	Ultra High Emission LEDs on 6mm PCB with adhesive base
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

UHE6 CSP D-M

Code	Description
F0218000007	FLEXYLED UHE6B CSP D-M 20m 10W/m 24V
1656101/0000	FLEXYLED UHE6B CSP D-M PW 0000mm 10W/m 24Vdc
Legenda	
UHE6B	Ultra High Emission LEDs on 6mm PCB with adhesive base
CSP	Chip Scale Package LEDs
PW	Pre-wired power cable
D-MWA	Dual colour D-Motion LED module

UHE6B CSP

Code	Description
F0218000030	FLEXYLED UHE6B CSP 20m 10W/m 24VDC WW
F0218000031	FLEXYLED UHE6B CSP 20m 10W/m 24VDC NW
1638901B/0000	FLEXYLED UHE6B CSP PW 0000mm 10W 24VDC WW
1638901N/0000	FLEXYLED UHE6B CSP PW 0000mm 10W 24VDC NW
Legenda	
UHE6B	Ultra High Emission LEDs on 6mm PCB with adhesive base
CSP	Chip Scale Package LEDs
PW	Pre-wired power cable
WW	Warm White
NW	Natural White

UHE6B CSP D-M

Code	Description
F0218000007	FLEXYLED UHE6B CSP D-M 20m 10W/m 24V
1656101/0000	FLEXYLED UHE6B CSP D-M PW 0000mm 10W/m 24Vdc
Legenda	
UHE6B	Ultra High Emission LEDs on 6mm PCB with adhesive base
CSP	Chip Scale Package LEDs
PW	Pre-wired power cable
D-MWA	Dual colour D-Motion LED module

UHE6 D-MWA

Code	Description
F0218000033	FLEXYLED UHE6 D-MWA 10m 9,6W/m 24Vdc
1639201/0000	FLEXYLED UHE6 D-MWA PW 0000mm 9,6W/m 24Vdc
Legenda	
UHE6	Ultra High Emission LEDs on 6mm dual layer PCB without adhesive base
D-MWA	Dual colour D-Motion Wave LED module
PW	Pre-wired power cable

UHE6 ES

Code	Description
1661901B1/2000	FLEXYLED UHE6 ES 20m 5,8W/m 24Vdc SWW
1661901B/2000	FLEXYLED UHE6 ES 20m 5,8W/m 24Vdc WW
1661901N/2000	FLEXYLED UHE6 ES 20m 5,8W/m 24Vdc NW
1662001B1/0000	FLEXYLED UHE6 ES PW 0000m 5,8W/m 24Vdc SWW
1662001B/0000	FLEXYLED UHE6 ES PW 0000m 5,8W/m 24Vdc WW
1662001N/0000	FLEXYLED UHE6 ES PW 0000m 5,8W/m 24Vdc NW
Legenda	
UHE6	Ultra High Emission LEDs on 6mm PCB without adhesive base
ES	Energy saving LED module
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

UHE6B ES

Code	Description
F0218000003	FLEXYLED UHE6B ES 20m 24Vdc 5,8W/m SWW
F0218000002	FLEXYLED UHE6B ES 20m 24Vdc 5,8W/m WW
F0218000004	FLEXYLED UHE6B ES 20m 24Vdc 5,8W/m NW
1660201B1/0000	FLEXYLED UHE6B ES PW 2000m 24Vdc 5,8W/m SWW
1660201B/0000	FLEXYLED UHE6B ES PW 2000m 24Vdc 5,8W/m WW
1660201N/0000	FLEXYLED UHE6B ES PW 2000m 24Vdc 5,8W/m NW
Legenda	
UHE6B	Ultra High Emission LEDs on 6mm PCB with adhesive base
ES	Energy Saving LED module
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

UHEP6 CSP

Code	Description
F0218000032	FLEXYLED UHEP6 CSP 20m 10W/m 24Vdc WW
1662701B/0000	FLEXYLED UHEP6 CSP PW 1000m 10W 24Vdc WW

Legenda	
UHEP6	Ultra High Emission Pro LEDs on 6mm PCB without adhesive base
CSP	Chip Scale Package LEDs
WW	Warm White
PW	Pre-wired power cable

HE8B

Code	Description
1557601B1/2000	FLEXYLED HE8B 20m 9,6W/m 24Vdc SWW
1557601B/2000	FLEXYLED HE8B 20m 9,6W/m 24Vdc WW
1557601N/2000	FLEXYLED HE8B 20m 9,6W/m 24Vdc NW
1608001B1/0000	FLEXYLED HE8B PW 0000mm 9,6W/m 24Vdc SWW
1608001B/0000	FLEXYLED HE8B PW 0000mm 9,6W/m 24Vdc WW
1608001N/0000	FLEXYLED HE8B PW 0000mm 9,6W/m 24Vdc NW

Legenda	
HE8B	High Emission LEDs on 8mm PCB with adhesive base
PW	Pre-wired power cable
SWW	Super Warm White
WW	Warm White
NW	Natural White

UHE10B

Code	Description
1665301B/2000	FLEXYLED UHE10B 20m 19,2W/m 24Vdc WW
1665401B/0000	FLEXYLED UHE10B PW 0000mm 19,2W/m 24Vdc WW

Legenda	
UHE10B	Ultra High Emission LEDs on 10mm PCB with adhesive base
PW	Pre-wired power cable
WW	Warm White

UHE10B D-M

Code	Description
1662101/2000	FLEXYLED UHE10B D-M 20m 19,2W/m 24V
1662201/0000	FLEXYLED UHE10B D-M PW 0000m 19,2W/m 24V

Legenda	
UHE10B	Ultra High Emission LEDs on 10mm PCB with adhesive base
PW	Pre-wired power cable
D-M	Dual colour D-Motion LED module

Warranty

Each unit is fully guaranteed for a period of 24 months from the date of delivery. From the warranty are excluded all defects caused by force majeure (lightning, fire, etc..), as well as any damage caused by improper use of equipment. The products must be installed and/or used in accordance with the specifications and instructions given by Domus Line Srl. They must also be installed and/or used in compliance with the provisions governing the installation and/or use of electric material force in the country where the products are installed and/or used. To this end, the buyer expressly releases Domus Line Srl from any responsibility for improper use, failure to comply with safety standards, technical specifications and instructions for use. The products which do not meet the standards and/or specifications in force in the European Union, will only be provided to the buyer that in the order specifies that the destination country does not belong to the European Union and indicating to have exhausted all the controls on compatibility of safety standards in force in the country outside the EU for which they are intended. In the absence of other arrangements for testing of the equipment, the standards established by the CEI (Italian Electrotechnical Committee) are valid. The warranty is void without fail in the event of tampering with the equipment by persons or technicians not specifically authorized by Domus Line Srl. The warranty does not cover normal wear and tear or the consequences of improper installation, nor the failure and/or breaks caused by inexperience and/or neglect.

scan for general conditions of sale ►



Copyright

© 2025 Domus Line®

The brand and name Domus Line are registered trademarks. Domus Line owns brand names and known and widely used logos. The brand names and logos published in this catalogue are registered or in any case subject to the laws on unregistered brand names. All reproduction or distribution by any means: photocopies, internet, microfilm or other means, total or partial, of this catalogue is forbidden without the written permission of Domus Line.

Patents

The patented models, registered and published in this catalogue, are protected and counterfeiting will be prosecuted in accordance with the law.

Disclaimer

This document is distributed as "uncontrolled" and Domus Line reserves the right to change the characteristics of the products to meet any technical or commercial needs, without prior notice. Domus Line verified the data published in this document with the utmost attention. However, because of the variables that exist between the development process and the publication of the catalogue, Domus Line assumes no responsibility for errors, gaps in data, inaccuracies, and so on.



DOMUS LINE

Domus Line srl
Via Maestri del Lavoro, 1
I-33080 Porcia (PN) Italy

domusline.com