

STOPit

DOOR STOPS WITH STEEL ANCHORS

Proudly Made in the USA



STOPit Door Stop

For sales inquiries, please contact:

Andy Dufour

E: andy@stopitdoorstop.com

stopitdoorstop.com P: 1-617-413-1531

TSS 1.00 SERIES

Black rubber is standard
White rubber available upon request

Proudly Made in the USA

DOOR STOPS WITH STEEL ANCHORS



Standard sizes include:

TSS1.0 = 1" TSS1.5 = 1.5" TSS2.0 = 2" TSS2.5" = 2.5"

All measurements are taken from floor to bottom of the rubber.

TSS HD SERIES

FOR EXTERIOR DOORS AND HEAVY DOORS

Proudly Made in the USA

PERFECT SOLUTION FOR HEAVY EXTERIOR DOORS

All the great features of the TSS 1.00 but with a heavier 3/4" diameter threaded shaft and a matching 3/4" threaded steel anchor.



Standard Sizes Include:

TSSHD 1.0" TSSHD 1.5" TSSHD 2.00"

All measurements are taken from floor to bottom of the rubber.

TSS HD Long Shaft SERIES

Proudly Made in the USA

PERFECT SOLUTION FOR HEAVY EXTERIOR DOORS W/TOPPING SLAB OR DECORATIVE STONE PAVERS

TSS 1.0 HD with custom long shaft for slabs with topping stones. This unit will allow you to anchor into the structural slab below the topping slab/stone.

The unit comes with a special STOPit installation/removal tool, stainless steel 3/4" drop anchor, and anti-seize lubricant.



Standard Size Includes:
TSS HD 1.0 Long Shaft

To determine size, measure from the floor to the bottom of the door when the door is in an open position.

Available for an additional cost, in custom finishes, as well as in taller units by special order.

TSS HD SUNSET 1.00 SERIES FOR EXTERIOR DOORS

White rubber available upon request

Proudly Made in the USA

SAFETY AND REDUCED LIABILITY

The Sunset Door Stop Kit is a 4-piece system which makes a removable, reusable, solid stainless-steel doorstop. This heavy-duty solid stainless doorstop can be removed at the end of the business day to eliminate any liability exposure to pedestrians such as Mall walkers.

MULTI-POSITIONED COMMERCIAL ENTRYWAYS

The Sunset Doorstop can be used anywhere in the radius of a door swing from 10 inches off the wall to 90 degrees allowing for multi positioned doorway openings on commercial entryways.

EASIER FLOOR MAINTENANCE

Once the Sunset Doorstop has been removed from the floor for the evening the floor cap is set into the threaded floor anchor making it much easier for cleaning crews to use their floor cleaning equipment.



4 Part Sunset HD System



Installation Pack


All measurements are taken from floor to bottom of the rubber.

TSS HD & TSS HD SUNSET SERIES INSTALLATION DIRECTIONS

For Exterior Doors

Solid Stainless-Steel $\frac{3}{4}$ in diameter threaded shafts with steel

Proudly Made in the USA

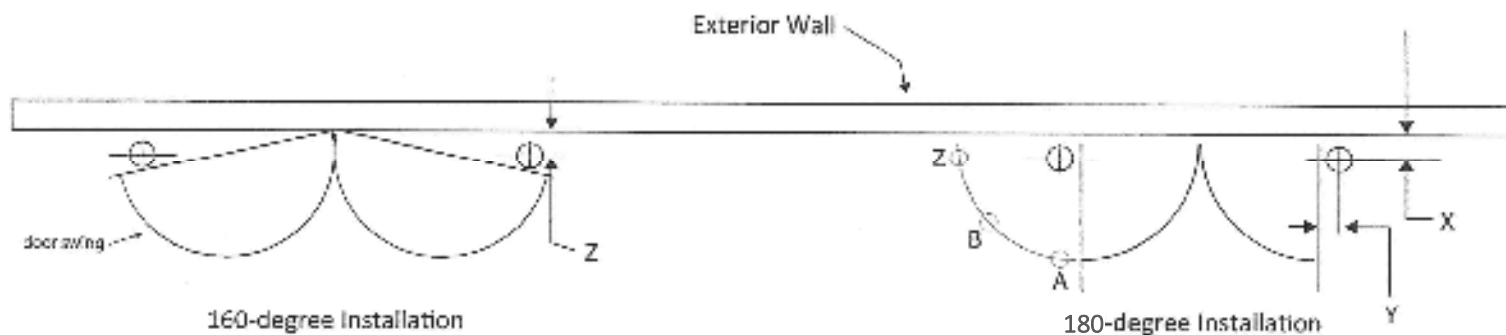

Drawing on the left shows:

Y = 1 $\frac{3}{4}$ " over from the 90-degree open door position.

X = Minimum distance away from the exterior wall is 10".

Z = Location of stop is a minimum of $\frac{2}{3}$ the distance of the width of the door from the pivot edge of the door to the center line of the anchor. The STOPit is located the width of the handle plus $\frac{1}{2}$ " away from the wall.

Drawing on the right shows:

A, B, Z = New possible locations for the TSS HD Sunset. They can be located anywhere within the door swing radius at minimum of $\frac{2}{3}$ the distance of the width of the door from the pivot edge of the door and minimum distance of 10" from the wall.

The TSS HD Sunset Steel Anchor can be drilled and installed in both concrete and stone. A steel anchor with installation instructions is provided with each STOPit TSS HD Sunset.

Sizes available are: TSS HD 1.00, TSS HD 1.50


Determining the size to be used. Grade of sidewalk slope away from the building must be taken into account. Open door to the position desired, using the Z,Y,X locations given above to locate install position of STOPit, measure the distance from the bottom of the door to the ground. That distance determines the size STOPit HD to be used.

Example: Distance measured is 1 $\frac{1}{2}$ " STOPit to be used is TSS HD 1.50


Distance measures 1" then a TSS HD 1.00 is used.

Concrete & Stone Floor Installation Steps


Proudly Made in the USA

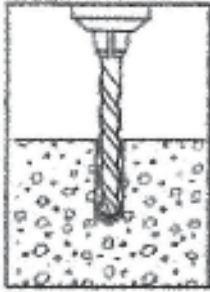


1. Drill hole to required embedment.

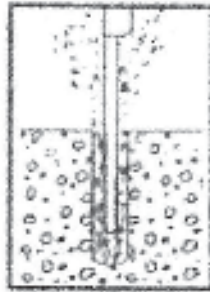

2. Clean hole with pressurized air.

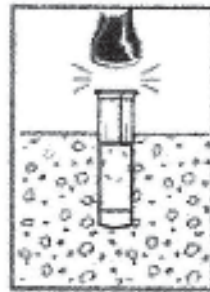

3. Drive anchor flush with surface of concrete.

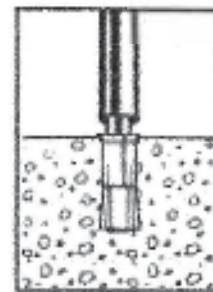

4. Expand anchor with available Red Head setting tool. Anchor is properly expanded when shoulder of setting tool is flush with top of anchor.

CAUTION / IMPORTANT

Installation of the Door Stop location on the floor must be no further than 1/3 of the width of the door from the latch end.

BASE MATERIAL	DROP-IN ANCHOR TYPE	PART NUMBER	SETTING TOOL PART NUMBER	BOLT SIZE- THREADS PER INCH	DRILL BIT DIA. In. (mm)	THREAD DEPTH In. (mm)	EMBEDMENT MIN. HOLE DEPTH In. (mm)
Solid concrete/ lightweight fill deck	RA	RA-12	RT-112	1/2" - 13	5/8 (15.9)	3/4 (19.1)	2 (50.8)
		RA-34	RT-134	3/4" - 10	1 (25.4)	1-1/4 (31.8)	3-3/16 (81.0)
Solid concrete/ lightweight fill deck	RL (w/ lip)	RL-12	RT-112	1/2" - 13	5/8 (15.9)	3/4 (19.1)	2 (50.8)
		RL-34	RT-134	3/4" - 10	1 (25.4)	1-1/4 (31.8)	3-3/16 (81.0)

Durable Solid
Stainless Steel Core
Made in the USA
Easy to Order
Best on Market



Steel Anchor

Installs Quickly

Easy Assembly

TSSWS WALLSTOP SERIES

Proudly Made in the USA

Stainless Steel Door Wallstop

Stainless Steel Fasteners

Made in the USA



Stainless Steel Construction

Pre-Assembled for Easy Installation

Stainless-Steel Fastener Included

#3 Impact Rated Installation Tip Included

TSSWS 1.0 is Intended to Be Installed on Wall Aligned with Door Handle

TSSWS 1.5 & 2.0 are to be Installed Close to the Floor Line to Allow Door Bottom to Make Contact with TSSWS Rubber Bumper

All TSSWS Models Require Pre-Installed Solid Wood Blocking (Minimum of $\frac{3}{4}$ " Thick)

Standard Sizes Include:

TSSWS 1.0 TSSWS 1.5 TSSWS 2.0

Overall Depth of Units:

TSSWS 1.0 – 2", TSSWS 1.5 – 2.5", TSSWS 2.0 = 3"

WFS 1.0 SERIES FOR WOOD FLOORS

Proudly Made in the USA



Solid Stainless-Steel Construction

Installation Tool Included

Pre-Assembled

Requires 3/8" Pre-Drilled Pilot Hole

Easy to Install

Made in the USA

Warranty

Statement of Warranty by STOPit

STOPit, 8 Mockingbird Hill Road, Windham, NH, USA (here below named as STOPit) warrants to the original purchaser of its solid stainless-steel door stop, known as the "STOPit", and anyone to whom it is transferred, that the STOPit product shall be free from defects in material and workmanship for the life of the product when installed as directed.

STOPit's obligation under this warranty is specifically limited to replacing or repairing the STOPit (or its parts) which are shown by Stopit's examination to be in a defective condition attributable to STOPit to qualify for this limited warranty. The claimant must return the STOPit unit to STOPit at 8 Mockingbird Hill Road, Windham, NH. 03087 within a reasonable time after discovery of the defect. STOPit will examine the STOPit door stop. If STOPit determines that there is a defect attributable to it, it will correct the problem within a reasonable time. If the STOPit is covered by this limited warranty STOPit will assume the expense of repair. If any defect attributable to STOPit under this limited warranty cannot be reasonably cured by repair or replacement STOPit may elect to refund the purchase price of the Door Stop, less reasonable depreciation in complete discharge of its obligations under this limited warranty. If STOPit makes this election, claimant shall return the equipment to STOPit free and clear of any liens and or encumbrances.

This is a limited warranty to the original purchaser of the STOPit, any person to whom it is transferred and any person who is an intended or unintended beneficiary of the equipment, shall not be entitled to recover from Stopit any consequential or incidental damages for injury to a person and/or property resulting from any defective equipment manufactured or assembled by STOPit. It is agreed and understood that the price for the STOPit is in part consideration for limiting STOPit liability. Some states or countries do not allow the exclusion or limitation of incidental or consequential damages, so the above may not apply to you. STOPit shall have no obligation under this limited warranty if the STOPit has been installed incorrectly or has been misused or neglected (including failure to provide reasonable maintenance) or if there have been accidents to the STOPit or it has been repaired or altered by someone else.

THIS IS A LIMITED EXPRESS WARRANTY ONLY.

This limited warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.