



EDGE-LIT LED EXIT SIGN

SAFETY AND INSTALLATION INSTRUCTIONS

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- La instalación, el servicio y el mantenimiento de las luminarias deben ser realizados por un electricista autorizado y calificado.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.

⚠ AVERTISSEMENT

- Avant d'installer, d'entretenir ou d'effectuer une maintenance de routine sur cet équipement, suivez ces précautions générales.



EDGE-LIT LED EXIT SIGN

SAFETY AND INSTALLATION INSTRUCTIONS

- Pour réduire le risque de décès, de blessures corporelles ou de dommages matériels dus à un incendie, un choc électrique, des chutes de pièces, des coupures/abrasions et d'autres dangers, lisez tous les avertissements et instructions inclus avec et sur la boîte du luminaire et toutes les étiquettes des luminaires.
- Une mise à la terre appropriée est requise pour assurer la sécurité.
- L'alimentation doit être coupée au niveau du disjoncteur avant l'installation ou l'entretien.
- L'installation, l'entretien et la maintenance des luminaires doivent être effectués par un électricien qualifié et agréé.
- Portez des gants et des lunettes de protection à tout moment lors de l'installation, de l'entretien ou de la maintenance du luminaire, et évitez l'exposition directe des yeux à la source lumineuse lorsqu'elle est allumée.
- N'installez pas de produit endommagé. Inspectez le luminaire pour les dommages qui ont pu se produire pendant le transport. S'il est endommagé, contactez immédiatement le fabricant.
- Ces instructions ne prétendent pas couvrir tous les détails ou variations de l'équipement ni fournir toutes les éventualités possibles à rencontrer en rapport avec l'installation, l'exploitation ou la maintenance. Si des informations supplémentaires sont souhaitées ou si des problèmes particuliers surviennent qui ne sont pas suffisamment couverts pour les besoins de l'acheteur ou du propriétaire, contactez le fabricant.

CAUTION

- Equipment should be mounted where it will not be subject to tampering by unauthorized personnel.
- Do not mount near gas or electric heaters.
- The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
- Do not use this equipment for any other purpose than its intended use.
- When re-lamping, use only LED lamps specified in the fixture. Using other lamp types may result in transformer damage or unsafe conditions.
- Use caution when servicing batteries. Battery acid can cause burns to skin and eyes. If acid is spilled on skin or eyes, flush acid with fresh water and contact a physician immediately.

NOTICE

- The battery in this unit may not be fully charged. After electricity is connected to the unit, let the battery charge up for at least 24 hours for normal operation of this unit to take effect.
- Do not use outdoors.

Installation Instructions

Surface Ceiling and Wall Mount

- Attach the crossbar to the junction box, using screws if needed (screws not provided).
- Use a screwdriver to open the front cover to connect the battery connector.
- Feed the AC supply wires through the canopy center hole.
- Assemble the canopy onto the main body assembly with (2) PM4*15 screws (supplied) and make the proper wire connections.
- Use (2) PM4-40 screws (supplied) to tighten the canopy to the crossbar.
- Insert the EXIT panel into the main body assembly gently. If the EXIT panel is for a single face, make sure the EXIT letter direction is correct.
- Determine the correct chevrons needed for the application.





EDGE-LIT LED EXIT SIGN SAFETY AND INSTALLATION INSTRUCTIONS


- The unit can be installed on any surface. The EXIT panel can rotate to any angle from 0° to 180°. Rotate the EXIT panel appropriately based on mounting selection.
- Apply continuous AC power and press the TEST button to ensure the wiring is correct.

Surface End Mount

- Attach the crossbar to the junction box, using screws if needed (screws not provided).
- Use a screwdriver to open the front cover to connect the battery connector.
- Remove the hole plug from the mounting end cap.
- Pull out all AC supply wires and feed the wires through the center holes of the mounting end cap and then canopy.
- Assemble the canopy onto the main body assembly with (2) PM4*15 screws (supplied) and make the proper wire connections.
- Use (2) PM4-40 screws (supplied) to tighten the canopy to the crossbar.
- Insert the EXIT panel into the main body assembly gently. If the EXIT panel is for a single face, make sure the EXIT letter direction is correct.
- Determine the correct chevrons needed for the application.
- The unit can be installed on any surface. The EXIT panel can rotate to any angle from 0° to 180°. Rotate the EXIT panel appropriately based on mounting selection.
- Apply continuous AC power and press the TEST button to ensure the wiring is correct.

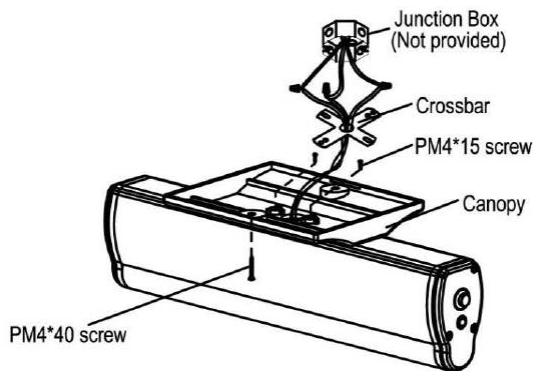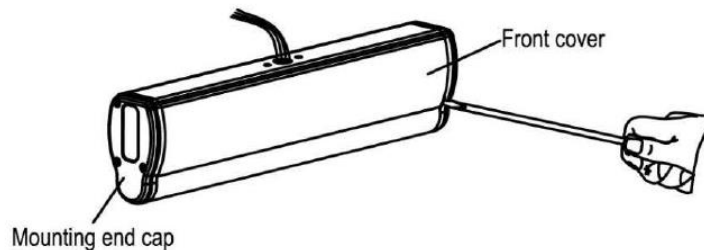

Surface Ceiling and Wall Mount

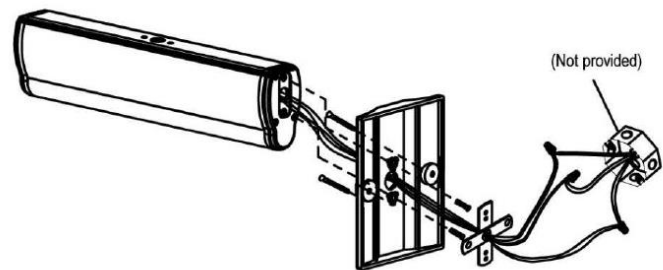


Surface End Mount




EDGE-LIT LED EXIT SIGN

SAFETY AND INSTALLATION INSTRUCTIONS

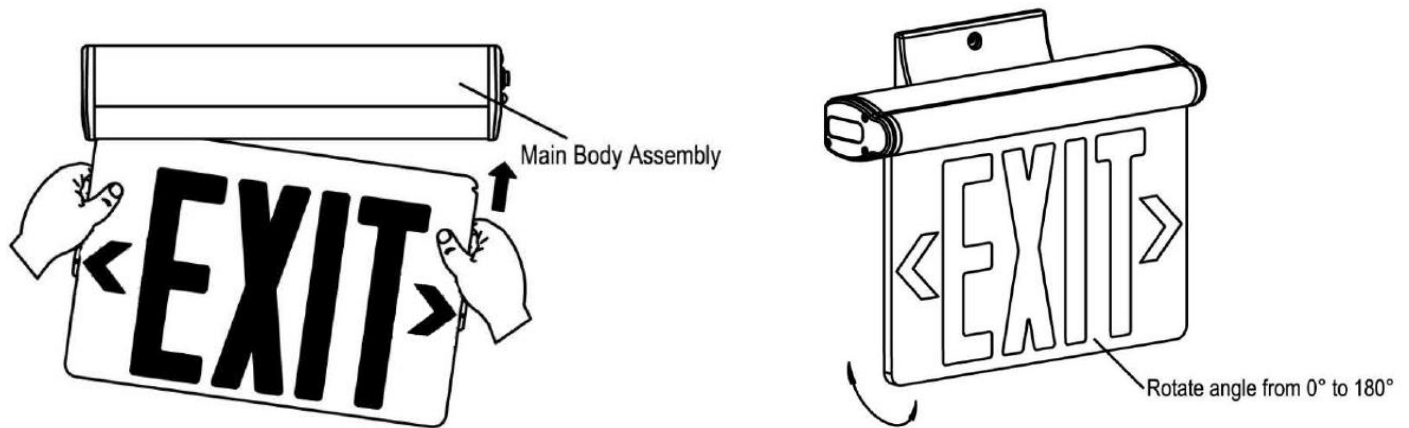

Assembly Drawing

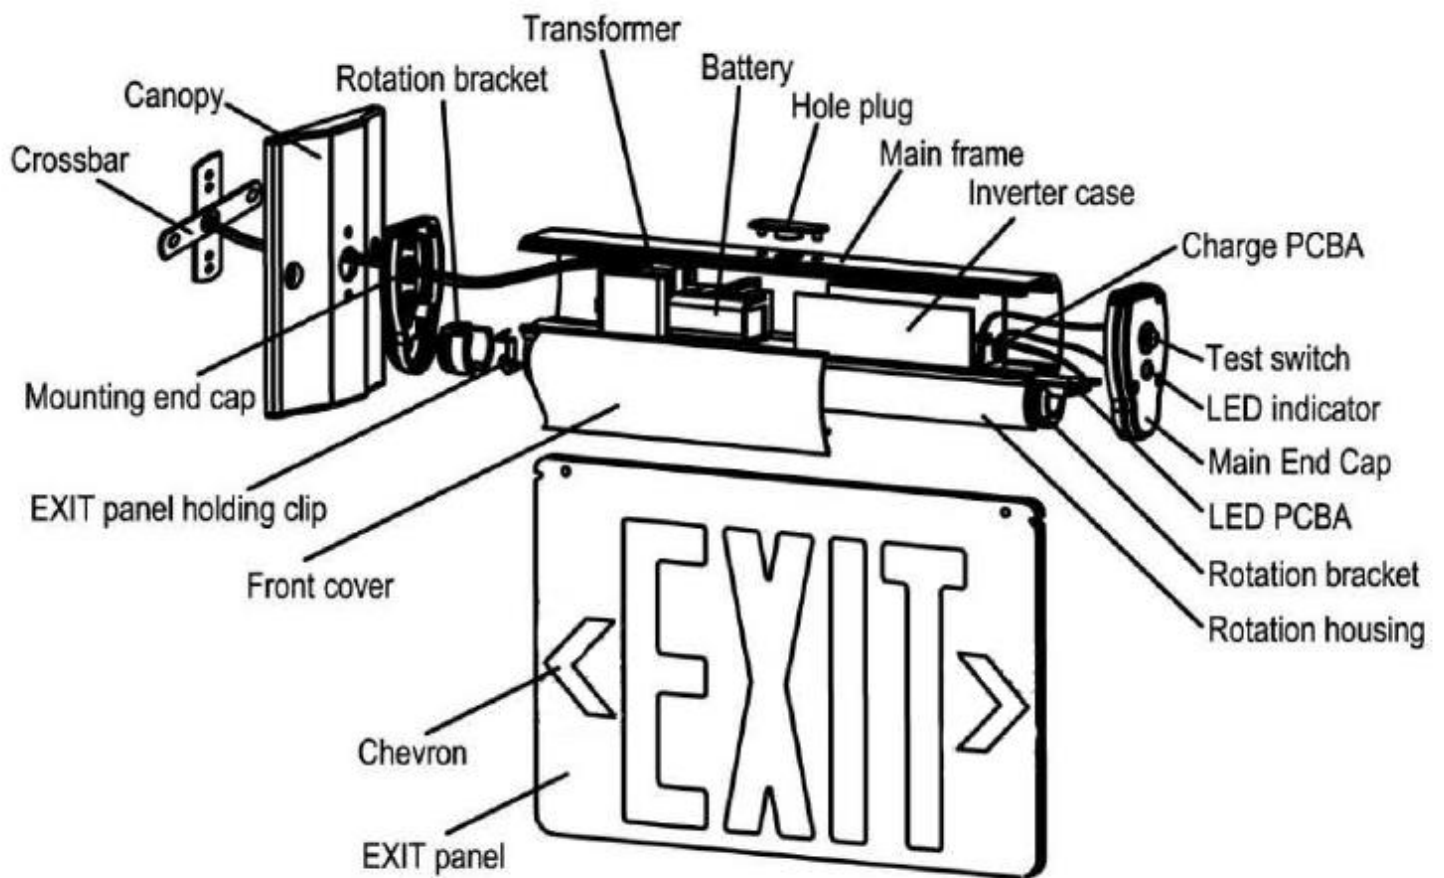



EDGE-LIT LED EXIT SIGN SAFETY AND INSTALLATION INSTRUCTIONS

Chevron Indicators

- If chevron indicators are needed,
 - Fold and tape the bottom of the paper profile cover, placing it at the bottom corner of the edge lit panel.
 - Remove the chevron cut-outs, and
 - Adhere cut-outs to the edge lit panel in the appropriate locations.
- If chevron indicators are NOT needed,
 - Simply remove and discard the paper profile cover with the chevron cut-outs.

