



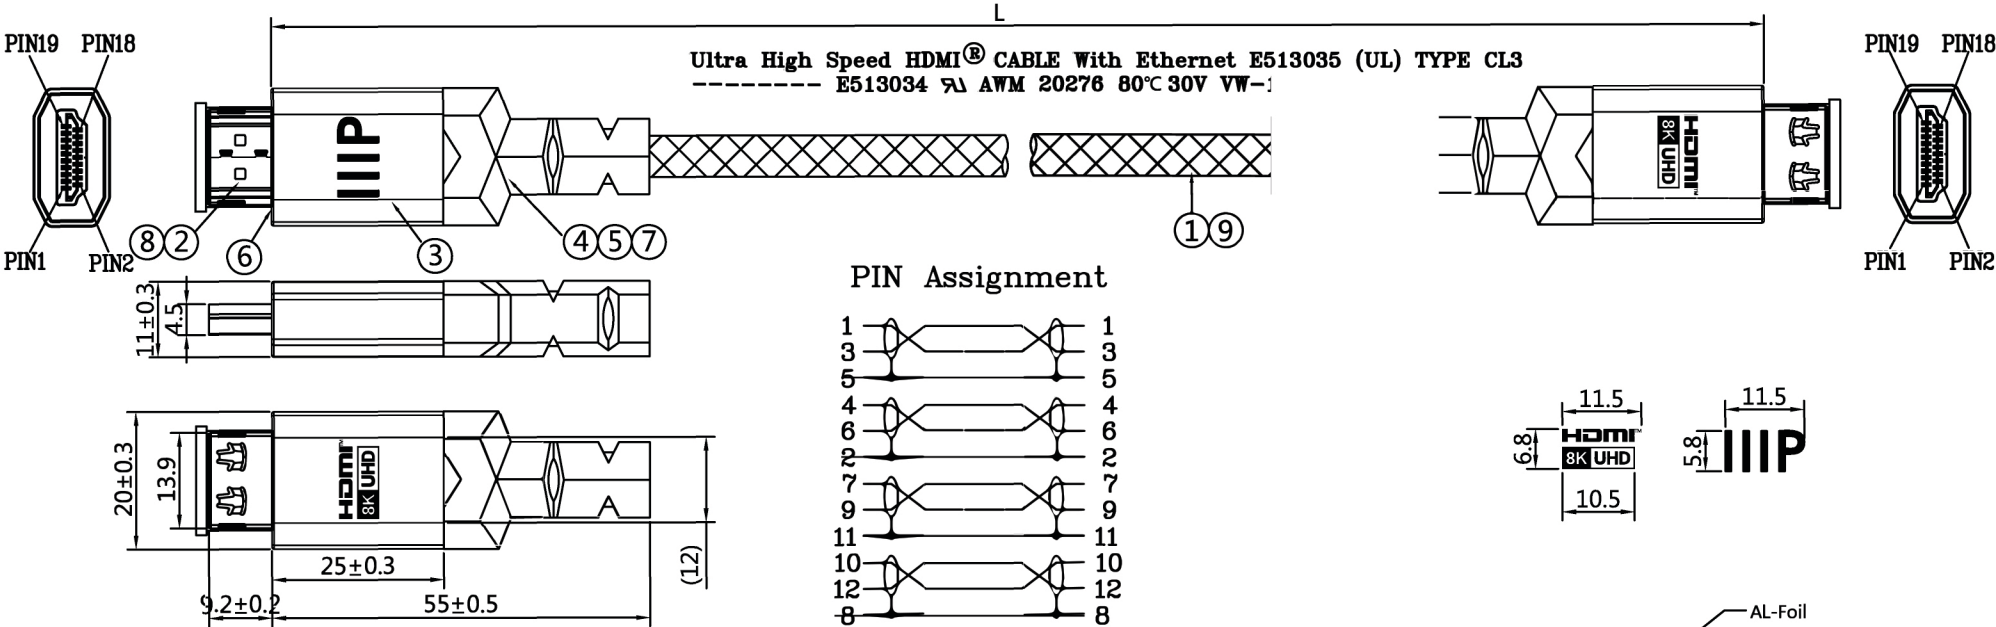

- NOTES:
- Test Condition:
(1) 100% OPEN & SHORT TEST;
(2) Insulation Resistance: DC300V 5MΩ(Min) ;
(3) Conductor Resistance: 5Ω/Max.
(4) Hi-Pot:DC 300V/0.1s.
 - The materials meet ROHS standard.
 - HDTV-DVD TEST:8K@60HZ
 - PASS 48G
 - Prop CAP 65

PIN Assignment		
1	1	1
3	3	3
5	5	5
4	4	4
6	6	6
2	2	2
7	7	7
9	9	9
11	11	11
10	10	10
12	12	12
8	8	8
14	14	14
19	19	19
17	17	17
13	13	13
15	15	15
16	16	16
18	18	18
SHELL	SHELL	SHELL

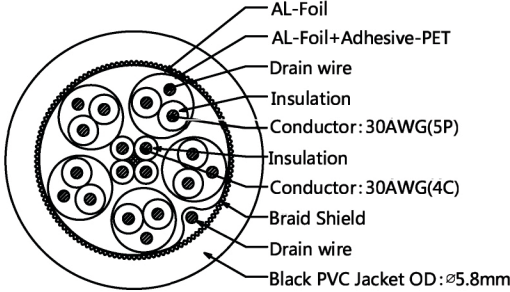

PID # :	44711	44712
LENGTH (L)	915±20mm(3FT)	1830±30mm(6FT)

⑨	BRAID	Black braid	1	PCS
⑧	Dust Cap	HDMI A Male transparent dust cover	2	PCS
⑦	OVER MOLD	PVC 45P Black	16	g
⑥	OVER MOLD	PVC 35P Red (19-1664 TPX)	10	g
⑤	COPPER FOIL	Copper foil, W6*L30MM	2	PCS
④	INTERNAL MODEL	PE	6	g
③	Shell	HDMI Shell, aluminium alloy,space gray(PMS P 172-14C)	2	PCS
②	CONNECTOR	Lock type HDMI 2.1V AM connector, gold plated, with shielding case	2	PCS
①	CABLE	HDMI UL20276 CABLE [30AWG*1P+D+AL-foil+Adhesive-PET]*5P+30AWG*4C+AL+D+B144/0.12AL-MG Jacket: CL3 Black PVC OD:5.8mm	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

APPROVED BY PM & DATE		DESCRIPTION :		
-		Monoprice 8K Certified Ultra High Speed HDMI Cable - Braided - 8K@60Hz, 48Gbps		
PM PRINT NAME		P/N: 44711_44712		
-		DATE : 2023/08/01	UNIT : MM	SHEET: 1 OF 1
		FILE NAME: 44711_44712_Diagram		