

Operation instruction

LIGHT / UP (A key)

MODE (B key)




(D key) START

(C key) RESET / SET

A . Function Description

- ★ 17 Digits LCD Display, Display Hour ,Minute ,Second , Year (2000~2049) 、 Day , Month and Week.
- ★ 5 Groups Daily Alarm and Chime hourly
- ★ Countdown function
- ★ Snooze function
- ★ 12 / 24H format,Auto Calendar
- ★ 1/100 second Chronograph
- ★ Dual time function
- ★ EL Backlight

B . Operational Manual

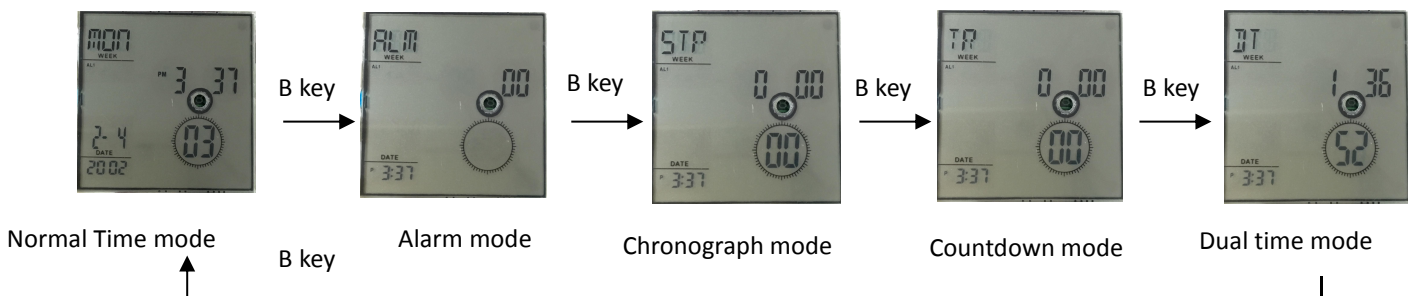

1.At normal time mode,press B key to select the other function display mode

At any state ,press A key EL backlight for 3s.

2.Time setting:

- ★ .In normal time mode, Press and hold C key for 2s to time setting and "Second" flashing, press A key "Second "to zero;; press B key to select item as following sequence :

Minute → Hour → Day → Month → Year

Press A key to adjust the flashing item,press C to the normal time mode.

- ★ Setting "second",if the "second "is range from 30~59.after turn to 00 ,the "minute" needs"+1"if the second value is range from 00~29",the "Minute "needn't change .
- ★ Adjusting the 12/24H format
At normal model, press D key to change the 12H format and 24H format by order.

3. Daily Alarm

- ★ Watch includes 5 groups of daily alarm separately ,”Hour “and “Minute” can be adjusted, When time reach the setting time, it will sound 10s ;” Chime hourly turn on. It will sound “Di Di” each hour.

Operation instruction

- ★ Each group alarm display separately as (AL1、AL2、AL3、AL4、AL5) , At each group,press D key turn on/off the alarm and the alarm symbol appear/disappear.
- ★ Only AL1 has the snooze function within 5 group alarm ,At AL1 alarm model,press D key turn on/off the snooze function and AL1 alarm symbol; when the snooze function turn on, After AL1 sound stop, it will automatic sound 10s every 5 minute, press C key to turn off the snooze function.
- ★ Alarm time setting:
 - a).At Alarm display mode, press A key to selecting and setting AL1 to AL5 .
 - b).Choose the Alarm you want,then hold and press C key 2 second :hour” flashing。
 - c). Press B key to choice “hour “.”Minute”by order
 - d).press A increase the value, press and hold A key can increase the value quickly , press C key exit the Alarm Setting mode and back to Alarm display mode.
- ★ The setting of Five groups alarm clock is the same.
- ★ Stop the alarm clock
When the alarm sounds, press any keys to stop the alarm
- ★ The switch of snooze function and Hourly chime function
Display screen In alarm mode 1, press D key to set the selected snooze function on and off.
In the "AL: 00" screen, press the D key to turn on or off the hourly chime.



: Indicates that snooze function is on (ON)




: Indicates that hourly chime is on (ON)


c).If the alarm function is on, the alarm opening symbol will still appear in other display mode.

4. Chronograph Function:


- ★ The measure range of chronograph is (0~23”59”59”59)
- ★ If don't stop Chronograph ,it will be measured continuously,and after reaching the max value ,the chronograph will return back to 0 ,then measure again,
- ★ If exit chronograph model during intermediate time ,the chronograph measure will be back to passing time
- ★ using chronograph measurement:
Passing time :



Intermediate time:

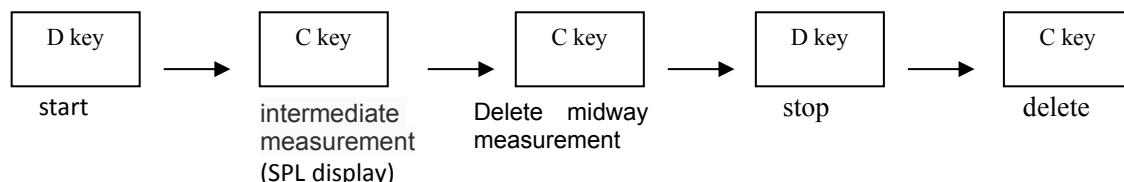

the measure the using time for two players:

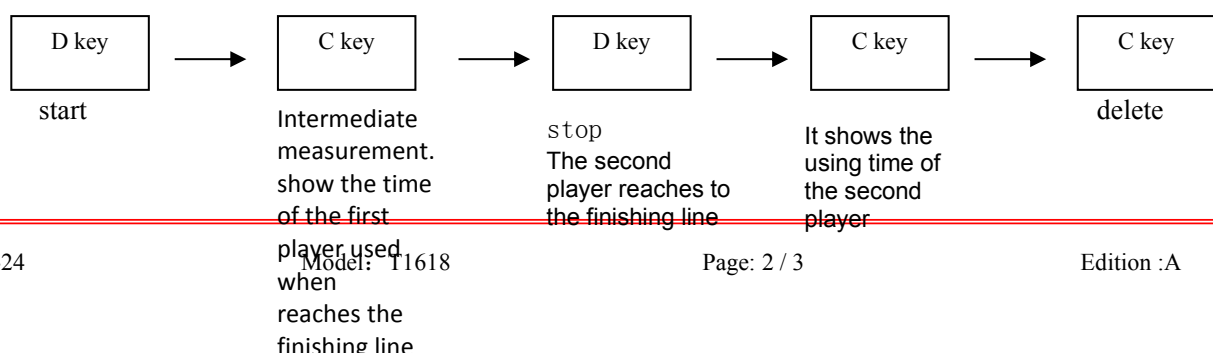

Operation instruction

Press C key will show all the time of chronograph measure ,and press C key again chronograph will return to zero ,


5. Countdown Function:

★ Countdown can be set in 1 minute and 24 hours, when the countdown to zero, the alarm will sound 10 seconds, then press any key to stop the alarm.

★ countdown setting:

a) In the countdown mode, press and hold C key for 2 seconds, enter the countdown setting mode, the flashing.

b). Press B to select the following items:



c). Press A to increase the value, and while press and hold A key can increase the value quickly.

d). After the countdown setting, press C to exit the setting mode and return to the countdown display mode.

e). If want to set the countdown value to 24 hours, Just set it to 0:00.

★ countdown operation:

Press D to start or pause the countdown, and when the countdown is paused, press C to return to the set starting time.

6. Dual Time:

In dual time model. Press and hold C key 2s, the "Hour" will be flashing, Press B key to select "Hour"Minute " setting, press A key to adjust the flashing item. what's more, press and hold A key can increase the value quickly, then Press C key return to dual time mode.