



SPF-1010-WB-TY


Smart Pet Feeder

Quick Start Guide

Preface

Quick start by the following steps:

- Please scan the QR code on the packaging box or search '**Smartlife**' from APP store to download the APP.
- Make sure the device's Wi-Fi indicator is rapidly blinking. If not, please reset it by holding the OK button for 5 seconds until the the power indicator flashes.
- Keep close to the feeder, then open your bluetooth and App. The device will be automatically detected and showed in the App.
- Select '**Go to add**' to add automatically the Pet Feeder in "**Small Home Appliances**" list.

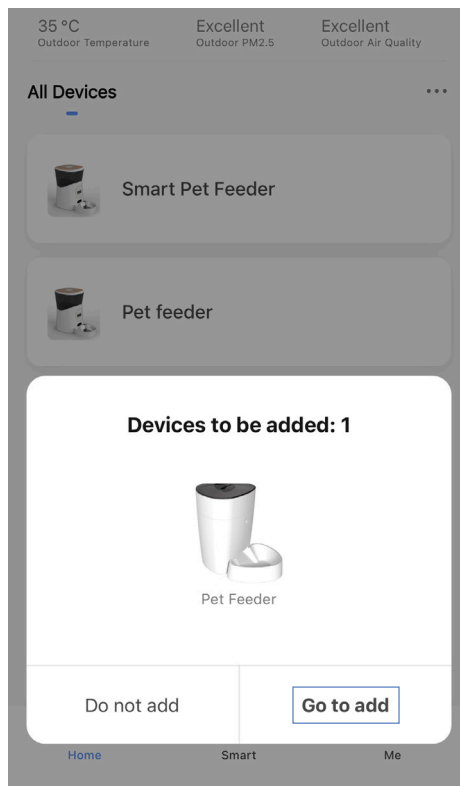

For more details about network pairing, please refer to chapter 4.

Safety Notice

WARNING: Failure to follow these safety notices could result in fire, electric shock, other injuries, or damage to the Smart Pet Feeder and other property. Read all the safety notices below before using the Smart Pet Feeder.

- Avoid high humidity or extreme temperatures.
- Avoid long exposure to direct sunlight or strong ultraviolet light.
- Do not drop or expose the unit to intense vibration.
- Do not disassemble or try to repair the unit yourself.
- Do not expose the unit or its accessories to flammable liquids, gases or other explosives.

Technical Specifications

Hopper Capacity

- 4 L

Auto Feeding Time

- 1-20 meals per day

Power

- DC power cord
- Backup batteries: 3 x D cell

Buletooth

- 4.2 Low energy

Dimension

- 300 x 240 x 300 mm

N. W.

- 2.1 kgs

Color

- White
-

1 Welcome



The Smart Pet Feeder allows you to feed your pet remotely or apply schedules for automatic feeding. You can get the feeding information anywhere at any time.

This guide will provide you with an overview of the product and help you get through the initial setup.

Features:

- Wi-Fi Remote control -Tuya APP smartphone programmable.
- Automatic & manual feeding
- Accurate feeding -Schedule up to 20 feeds per day
- 4L food capacity -4L large capacity
- Dual power protective -Battery backup, continuous operation during power or internet failure

2 In the box

- **Pet Feeder x 1**
- **Power Adapter x 1**
- **Quick Guide x 1**


Please check the condition and the accessories of pet feeder after you open the box.

APP Download:

1. Remove the cover and scan the QR Code with your smartphone.
2. Search '**Smartlife**' APP from App store.


Tips:


Dry and solid pet food only, recommended food diameter between 5 to 10mm.



3

Get to know your device

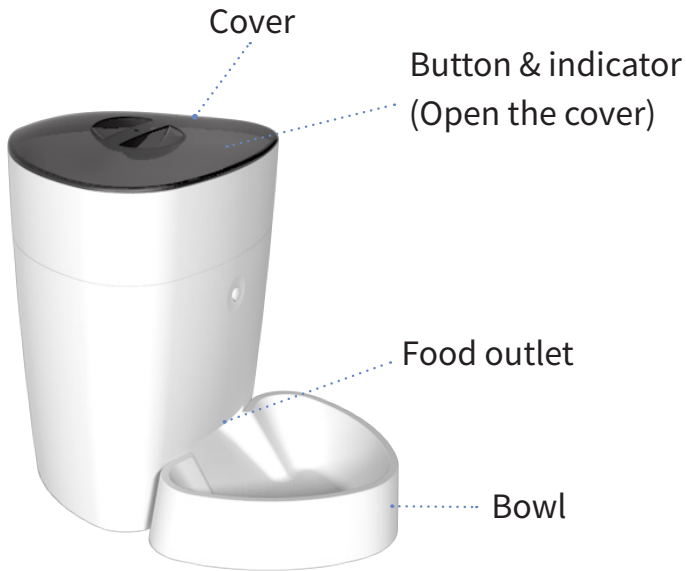

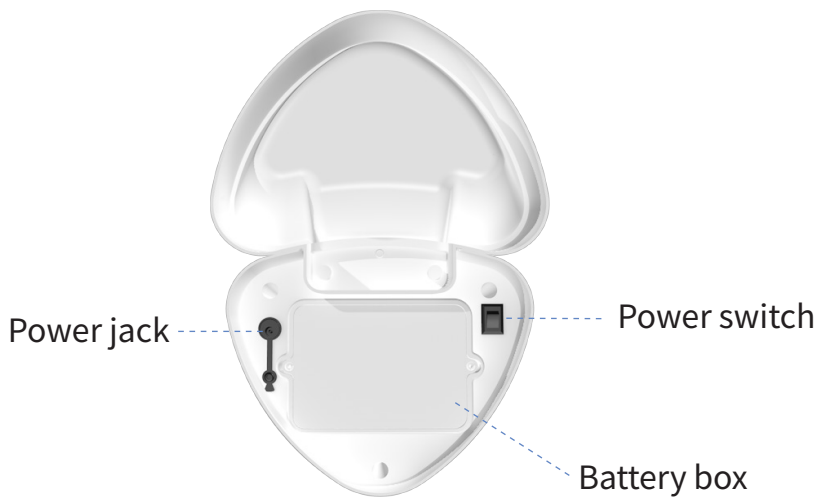

Battery box


3 x D-size batteries. Please pay attention to the polarity. Please note that the battery charging is for backup purpose only. If you wish to control the pet feeder remotely, power supply is needed.

Power switch

— for ON, ○ for OFF.

Power jack

Use the supplied power adapter.

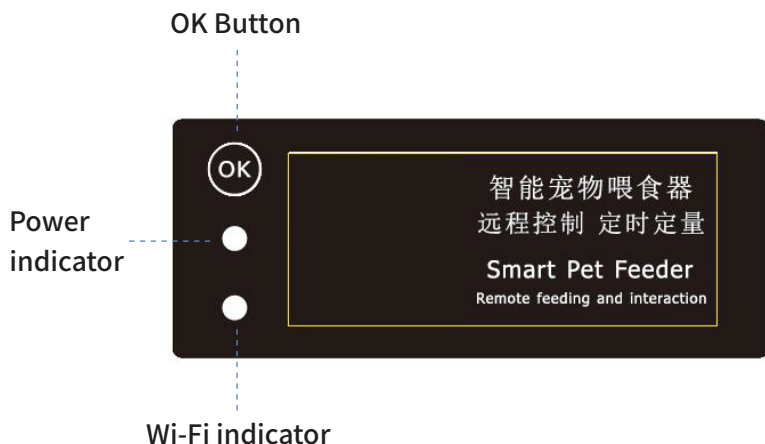

OK Button:

- Tap once to feed once in 1 portion
- Reset the network configuration

Hold the '**OK**' button for 5 seconds until the power indicator flashes once to reset. The device will enter the EZ pair mode at the first reset.

If resetting the device again in the EZ pair mode, it will change to AP pair mode.

Wi-Fi indicator

The Wi-Fi status gives the following information:

Wi-Fi Status	What it means
Rapidly blink	EZ pair mode.
Slowly blink	AP pair mode.
Steady light	Pet Feeder has join the Internet.

- **EZ pair mode** (Default): Quick pair devices. You can set all devices to this mode, and then add devices in batches on your phone.
- **AP pair mode**: If you would like to pair one specific device during many devices. Please refer to FAQ1 to configure network in this mode.

4

Get started

To get started, you will need:


- Connect your phone to the 2.4Ghz Wi-Fi network.
- A mobile phone with a mobile APP installed.

Then follow the steps below:


1. Power on the Smart Pet Feeder.
2. Make sure the Wi-Fi indicator is rapidly blinking. If not, please reset it.

4.1 Add devices


1. Open your App.
2. Login with an existing account. If you are a new user, you need to create an account at first.
3. Turn on **"Bluetooth"** and **"Location"** on your phone before connecting the Wi-Fi.

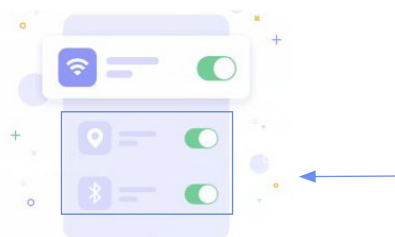

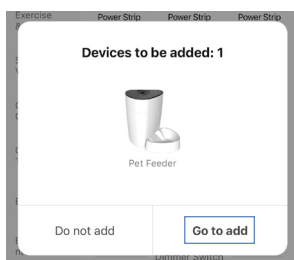

4. Once login, the phone will automatically detect the device via Bluetooth. And choose "Go to add".





5. Enter your home Wi-Fi account and password (Only support 2.4Ghz Wi-Fi), then tap **"Next"** button.



2.4Ghz


5Ghz

 Wi-Fi Name



 Password



Next


Other Device Adding Mode

1. Configure the network in EZ mode.

Note: In this case, no need to turn on your phone's bluetooth.


1.1 Please click the '+' button at the top right corner of the App to add devices.

1.2 Select **'Pet Feeder'** to add manually the Pet Feeder in **"Small Home Appliances"** list.

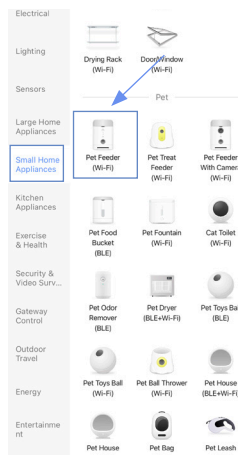

1.3 Enter your home Wi-Fi account and password (Only support 2.4Ghz Wi-Fi), then tap **"Next"** button.


1.4 Place the router, mobile phone, and Pet Feeder as close as possible. Confirm the indicator on your device is rapidly blink, then tap **"Next"** to wait for connection.

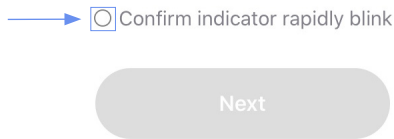

2 Configure the network in AP mode.

2.1 Reset the device in EZ pair mode, it will switch to AP pair mode. The indicator on your device will blink slowly.

2.2 Then switch the network configuration mode to AP mode at the upper right corner of the APP when you add the device.

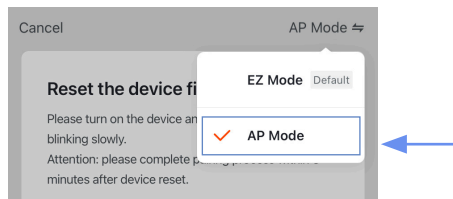


2.3 Place the router, mobile phone and Pet Feeder as close as possible. Confirm the indicator on your device is slowly blink, then tap **"Next"** to wait for connection.

Connect your mobile phone to the device's hotspot

1. Connect the phone to the hotspot shown below.



2. Go back to the app and continue to add devices.


2.4 After the device has been added, you can use  to rename the device. (If failed, please refer to FAQ2 to troubleshoot)

6. Wi-Fi configuration of the device failed



- Confirm the entered router password is correct.
- Ensure that the DHCP service is enabled for the router. If not, the IP address will be occupied.
- Please confirm the Wi-Fi network is stable:

Put the phone besides your device and make sure they are in the same network environment, try to open a website to judge if the network can be used.


- If your router supports both 2.4Ghz and 5Ghz, please enable the 2.4Ghz channel and add device under 2.4G Wi-Fi channel. You can follow the following step on the App to configure the router.

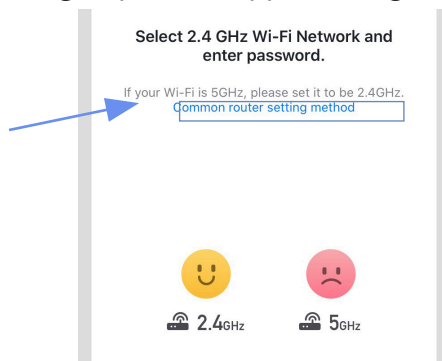

- Confirm that both the location permission of phone system and the App are enabled.

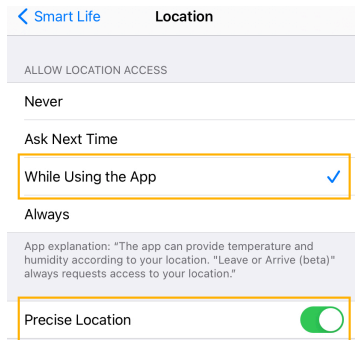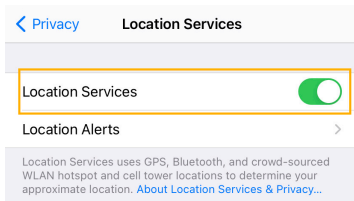

- If you have already upgrade the iOS system to 14, you need to enable the "**Local network**" and "**Bluetooth**" of the App.

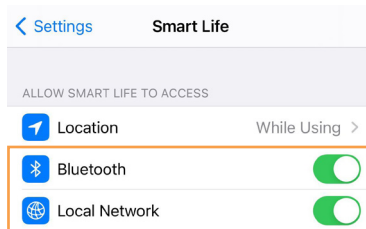

- If it still does not work, it is recommended to change the router and try again.


7. Device offline

- Confirm whether the Pet Feeder is powered on.
- Please confirm whether the home Wi-Fi network is normal, or whether the Wi-Fi name and password has been modified.
- If there still have problems after the above checking, it is recommended to remove the device or change the router to add it again.

8. Place the router, mobile phone, and Pet Feeder as close as possible. Confirm the indicator on your device is rapidly blink, then tap "**Next**" to wait for connection.

→  Confirm indicator rapidly blink

Next


9. After the device has been added, you can use  to rename the device. (If failed, please repeat above steps.)

4.2 App Overview:

Home management

Location
Information

Device List

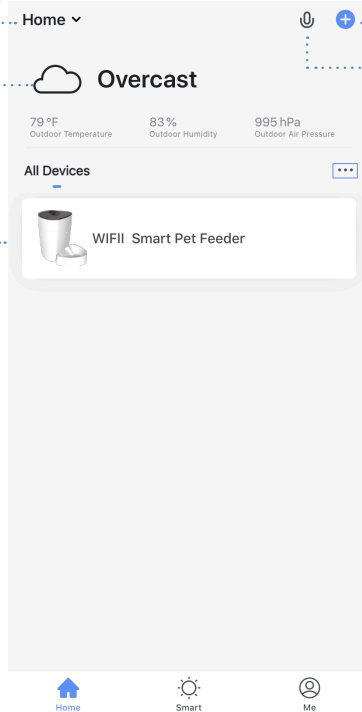

Add Device

Voice Control

Room
Management

Home:

1. Device list

You can check the added device, tap one to enter control board

2. Location information

Information about your local weather conditions, outdoor temperature, PM

3. Home management

Add or delete home and manage home names, rooms, locations, and members


4. Room management

Manage room. You can create rooms and assign devices to each room

5. Voice control (Temporarily not available on App)

Smart: Create smart scene and add automatic function (Temporarily not available)

Me: App settings and FAQ about the app

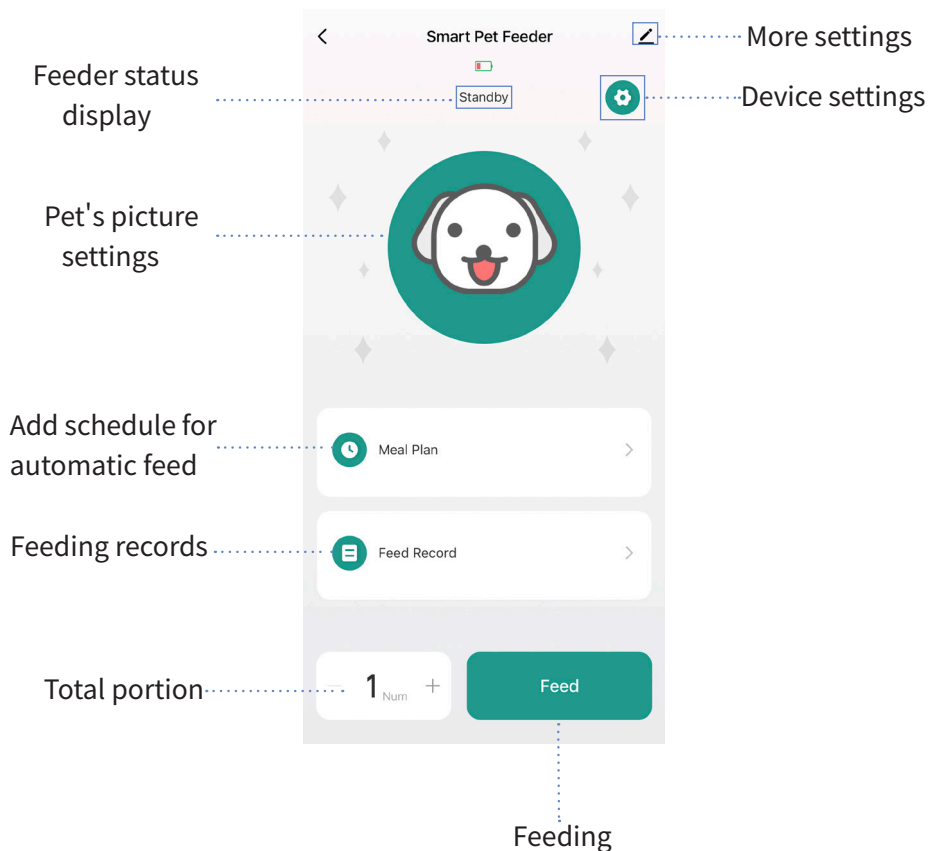

1.Control board:

Select the target Pet Feeder in device list then enter the control board

- Meal plan

Tap to edit the schedule for the automatic feed. Schedule supports up to 20 items. The error of the schedule is about 30 seconds.

- Feed record

Tap to check the feeding history.

- Feed

Tap to feed manually. The maximum number of portion is 20 at a time.

- Feeder status display

It will have three different status: Standby, Feeding and Done.

- Pet's picture setting

Tap to set or change the pictures of your pet.

- Total portion

Tap "-" to reduce feeding portion and tap "+" to add feeding portion when manual feeding. The maximum number of portion is 20 at a time.

- More settings


Tap for more settings, like rename device, device information, third-party control and others.

- Device setting

After confirmed to restore factory settings, the device will change to EZ pair mode and the cloud record will be cleared.

2. Food stuck alarm:

When the pet food get stucked, the APP will receive the alarm. And the red light will flash slowly.

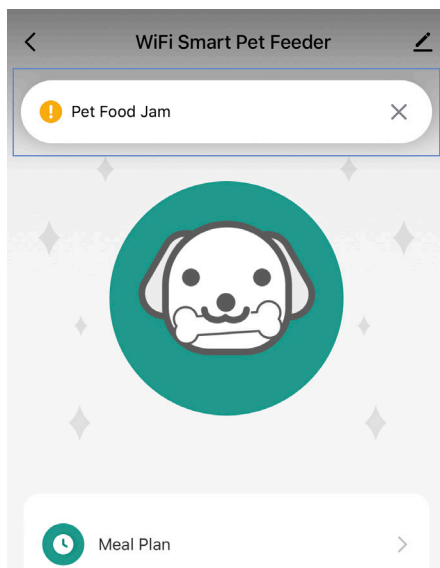

3. Feeding plan display:

The next feeding time and the number of portions will be shown.

