

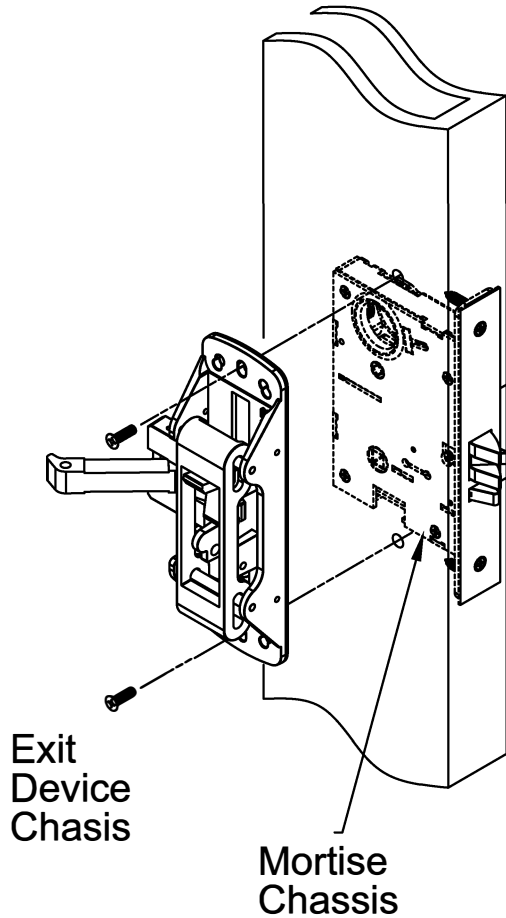
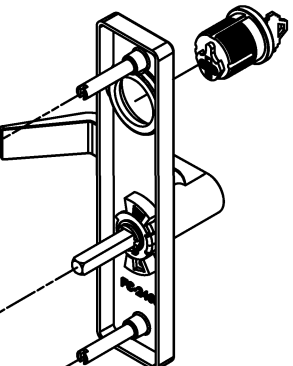
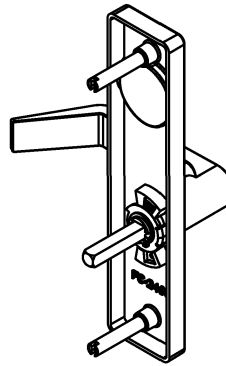


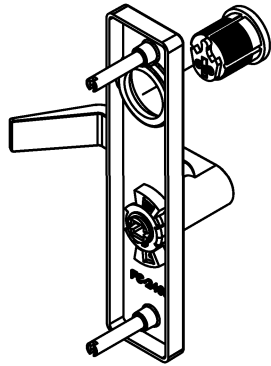

INSTRUCTIONS FOR CAL-ROYAL NMRESC TRIM FOR N-MR7700 / N-MR9800 SERIES MORTISE EXIT DEVICE

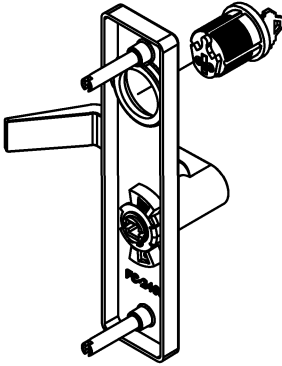


NMRESC-7700	NMRESC-7730	NMRESC-7740	NMRESC-7705
NMRESC-9800	NMRESC-9830	NMRESC-9840	NMRESC-9805
 Key locked and Unlock mortise lock Lever operate To open	 No Cyl, Trim Always Operable	 Pull when Push bar locked down Dummy Esc Lever Trim	 Rigid Lever, Cyl Esc Lever Trim
00 function Entrance	30 function Passage	40 function Dummy	05 function Storeroom
Attach the collar and mortise cyl to the esc case with mortise nut, attach case to door thru bolting (2) screws to the chasis, aligning spindle to hub	Attach Esc case to door thru bolting the (2) screws to the chasis, allaning spindle to hub of the Chasis	Attach the cooar and dummy cyl to the esc case with mortise nut, attach case to door thru bolting (2) screws to the chasis,	Attach the collar and mortise cyl to the esc case with mortise nut, attach case to door thru bolting (2) screws to the chasis, aligning sprindile to hub


CAL-ROYAL NMRESC Lever Trim For N-MR7700 / N-MR9800 SERIES

Method of Change Handing of Lever , LHR (Reverse step for RHR)



1.Lever Trim shipped and supplied with lever positioned neutral, Non-Handed

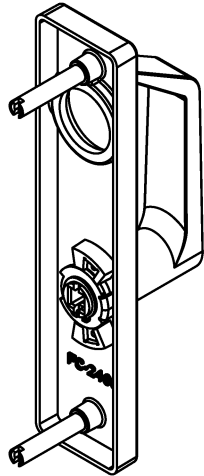


2-1.Rotate lever to desired hand, LHR, position at 90°~95°
2-2.Fasten guide stop plate to case

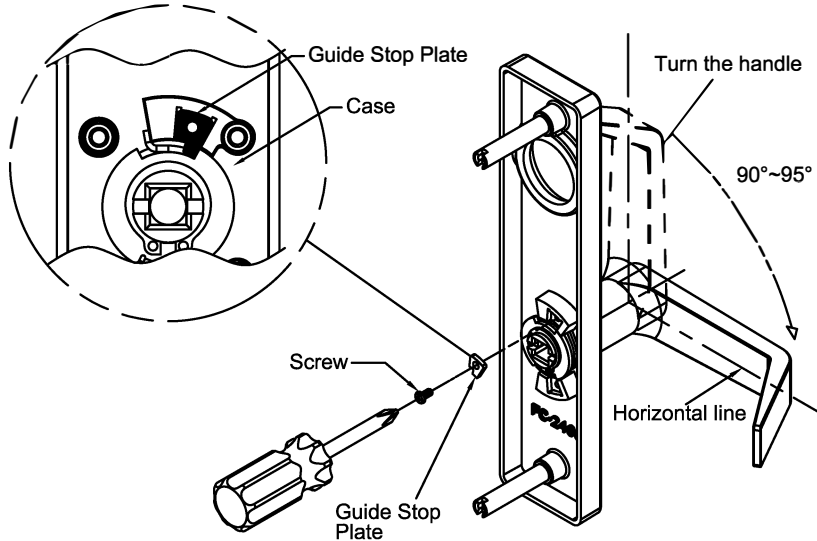

3.Done

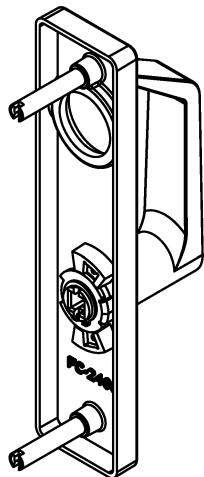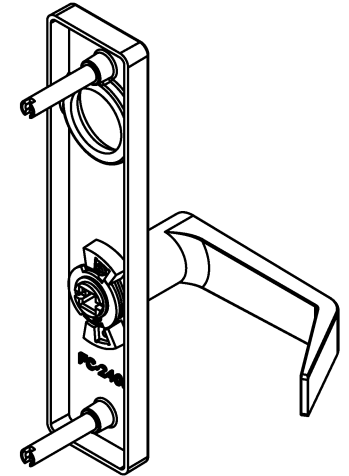

1.Lever Trim shipped and supplied with lever positioned neutral, Non-Handed

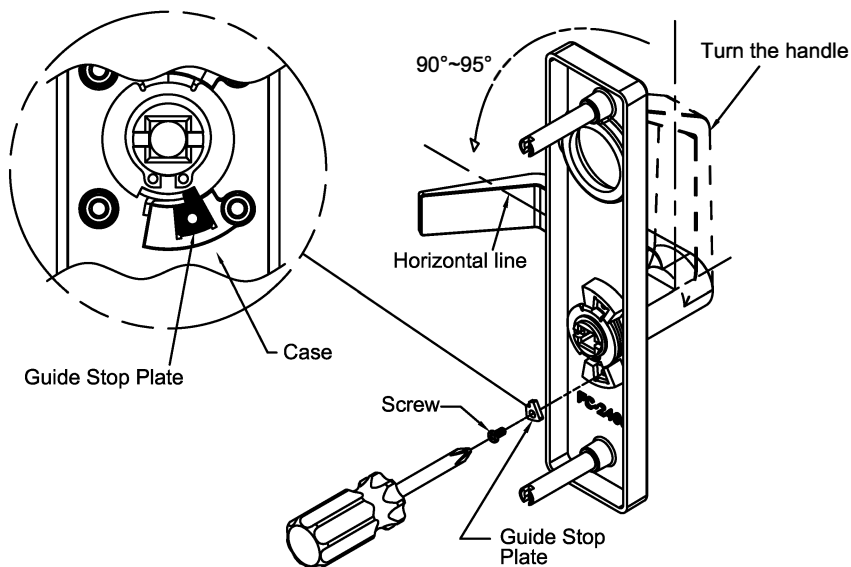

2-1.Rotate lever to desired hand, RHR, position at 90°~95°
2-2.Fasten guide stop plate to case

3.Done

