

# USER GUIDE V1.0

## *Smart Key Box-S2*




# OMUARK

By OmfocusTech

[www.omuark.com](http://www.omuark.com)

Thank you for choosing our products.

More questions contact us at [contact@omuark.com](mailto:contact@omuark.com)



*Wall-Mounted model*



*Portable model*




*Car-Mounted model*



*Touch key pad*

*Emergency USB-C port*

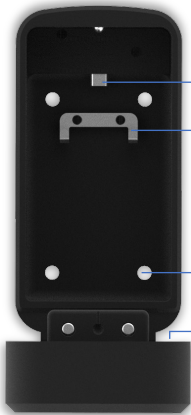

*Shackle Switch (for models with portable shackle)*

*Key hanger*

*4 Mounting screw holes*

*Battery holder*

**Includes:**



Wall mounting screw  
4 PCS



Screw driver  
1 PCS



Reset Tool  
1 PCS



## Features

*Bluetooth*

*Dimension 155 x 80 x 56mm*

*Weight 0.8Kg*

*Aluminium alloy + Tempered Glass*

*Touch keyboard*

*Smart APP management*

*Fingerprint ( Optional Model)*

*4 X AAA batteries, 12 months life*

*Emergency USB-C*

*OTA Updates*

*Wall-mounted or Portable / Car-Mounted*

# Local function settings

## Getting Started

- >Open Key Box and remove the 4 screws to open the battery lid.
- >Insert 4 AAA batteries

## Important Settings

Please restore the device to factory mode **before** using, use the reset tool to press and hold the reset button 5-10 seconds until you hear a long beep. And change the initial admin Code, the Initial admin code is 123456. *All code length must have at least 6 digits.*

>Tap \* + 0 + \* + initial admin password + # + new admin password + # + new admin password + #

## Add User Password

>Tap \* + 1 + \* + admin password + # + new user password + # + new user password + #

## Delete User Password

>Tap \* + 2 + \* + admin password + # + user password to be deleted + # + user password to be deleted + #

## Delete All User Password


>Tap \* + 00000 + \* + admin password + #

## Local Restore factory settings

Restore factory settings and delete all registered access. The factory code 123456 will be restored. Unlock the unit and open the lid. Remove the battery cover and verify that there is power on the device. Locate the reset hole (between the battery sections).

Use the included reset pin and hold the reset button for about 5 seconds until you hear a long beep. Verify that factory code 123456# is restored.



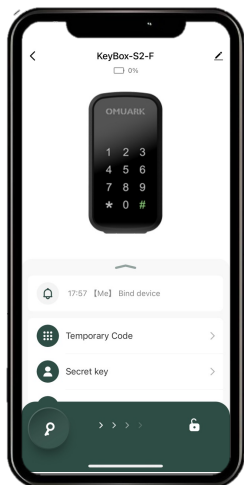

## APP function settings

### Connecting to the APP

>Scan the QR code to download the APP >Tap \* + 9 + \* + admin password + #,

>The Key Box is ready to pair.

>Enter the APP and click "+" to connect

### Temporary Code:

Custom: Online password setting

Time-Limited / one-off / Dynamic: Offline password setting

Clearing: Delete the Time-Limited code

### Secret key:

**Set up Fingerprints** (suitable for models with fingerprint function),

**Set up Passwords**



Smart Life



TUYA Smart



OMCONNECT



APP Download

### Multiple APP connections

Click "+", the master user can add or authorize other family members' APP to connect with this device. **Note**, that Bluetooth devices do not allow two or more applications to operate the product at the same time

### Remote Unlock:

Unlocking remotely when the key box is connected to the gateway.

### APP Restore factory settings

Enter the upper right corner of the APP main interface tap the "edit mark" first, and click "Disconnect and wipe data".

The Key box is disconnected from the APP, all registered access deleted.

The factory code 123456 will be restored.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

**OMUARK**