

INSTEON®



Assurance Kit
Quick Start Guide

Hub

Status LED



Idle



Linking



Unlinking



Ethernet Port

Power



Factory Reset Button




Ethernet
Cable



Power
Cable

Setup Your Kit


- 1 Connect the Hub to power and your internet router using only the cables provided.

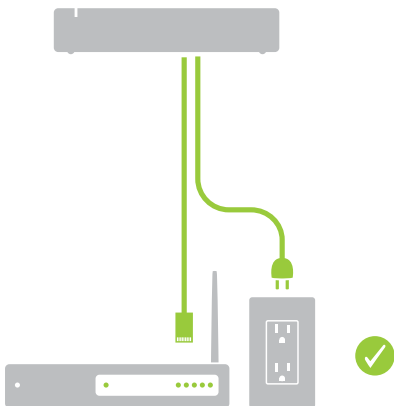

Avoid power strips and switched outlets

2


Download and install the latest INSTEON for Hub App from your device's app store.

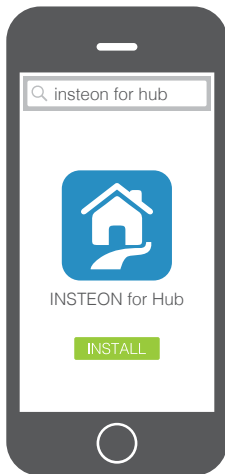

Scan the QR Code and
tap your store.

3


Connect to the same network as the INSTEON Hub and launch the App. Create a new account.

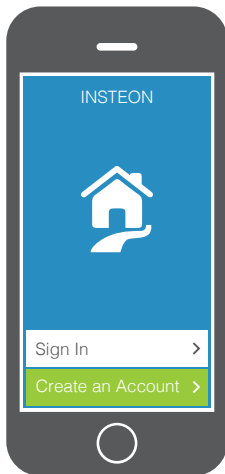

Add Devices

4

Follow the on-screen instructions to add your Dimmer Modules.

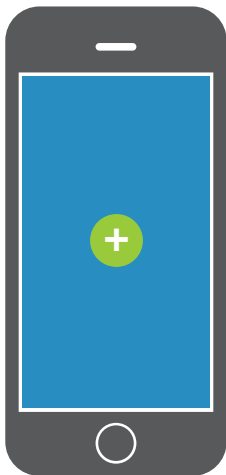


For additional documentation, visit:
insteon.com/support

Dimmer Module

 On

 Off

Status LED

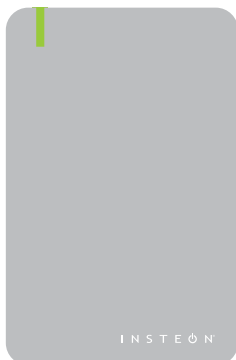

 On
Brighten
 Off
Dim
 Set Button





Up to 300W maximum load



Learn more about Dimmer Module
[insteon.com/dimmermodule-qsg](https://www.insteon.com/dimmermodule-qsg)

Open/Close Sensor


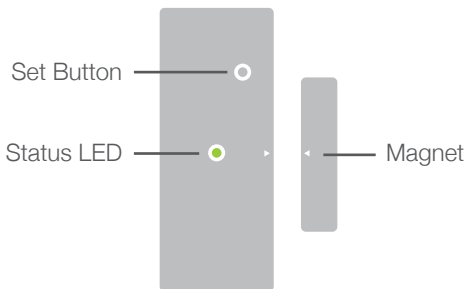


(Cover Removed)



Learn more about Open/Close Sensor
[insteon.com/openclosesensor-qsg](https://www.insteon.com/openclosesensor-qsg)

Motion Sensor

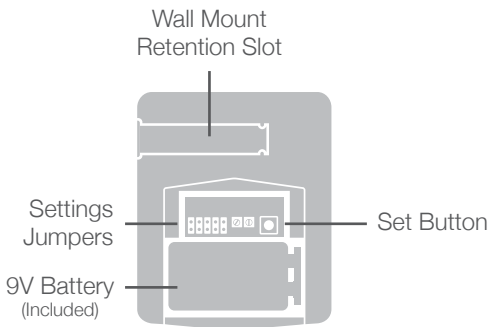


(Cover Removed)



Learn more about Motion Sensor
[insteon.com/motionsensor-qsg](https://www.insteon.com/motionsensor-qsg)

Leak Sensor

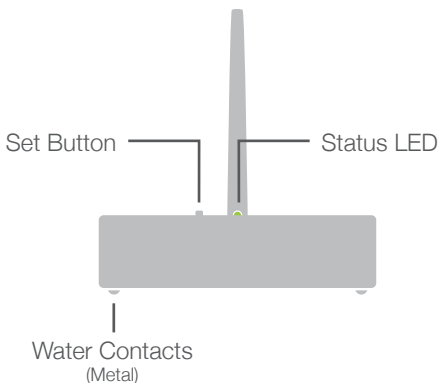

AA Battery
(Included)



(Cover Removed)



Learn more about Leak Sensor
[insteon.com/leaksensor-qsg](https://www.insteon.com/leaksensor-qsg)

Remote Access

You can monitor and control your devices when away if you setup Remote Access. Go to Settings > House > Remote Access Guide to configure port forwarding.



We're here to help. Contact INSTEON Support at 866.243.8022.

Create a Schedule

Schedules can be set for individual devices or entire scenes. Go to Settings and tap Schedules.

