



Tri-folding Wireless Keyboard with backlit

IC-BK05

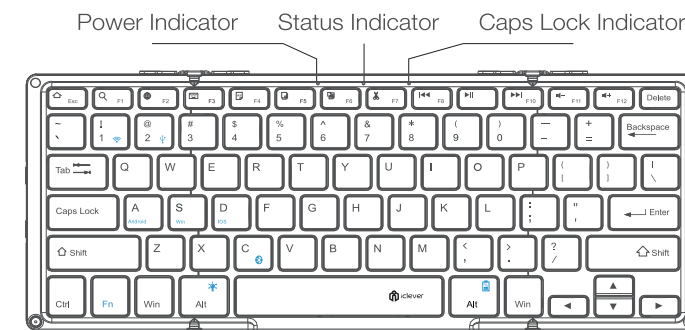
User Manual

Thank you very much for purchasing this keyboard, please read this user manual carefully before use.


Package Contents

- 1 x Wireless Keyboard
- 1 x Micro USB Cable
- 1 x Carry Pouch
- 1 x User Manual
- 1 x Warranty Card


Indicator Lights Description



① Power Indicator:

- 1) Unfold the keyboard: it will light in green color for several seconds and then turns off.
- 2) Low battery capacity: When the keyboard is in low battery capacity, it will flash in red color to remind you to charge it.
- 3) Charging: stably on in red color
Fully Charged: automatically turns off
- 4) Battery capacity display: Press "Fn +  " keys, it flashes in green color.
Every flash represents 25% battery power
(total 4 times flashes, 100% remaining battery power).

② Status Indicator:

Press "Fn +  " keys to pair the keyboard with your Bluetooth-enabled devices.
Pairing: quick flash in blue color
Successfully Paired: automatically turns off

③ Caps Lock Indicator:



Press Caps Lock key to switch capital and small letters.
Inputting Capital Letters: lit in blue color
Inputting Small Letters: automatically turns off

(For Android users, the Caps Lock indicator may not appear, but the Caps Lock function is still activated as per normal.)

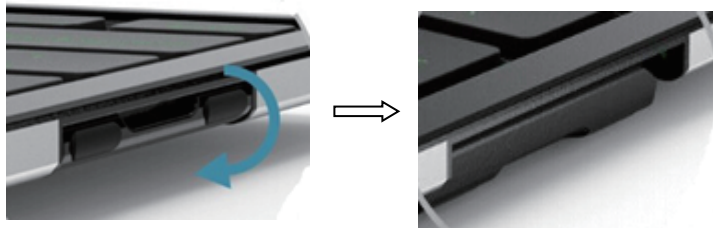
Specifications

Bluetooth Version	Bluetooth 3.0
Operating Range	Up to 10m
Modulation System	GFSK
Lithium Battery Capacity	750mAh
Uninterrupted Working Time with backlit	5h
Uninterrupted Working Time without backlit	300h
Stand-by Time	90 days
Charging Time	< 4h
Lithium Battery Life	3 years
Key Life	3 million clicks
Unfolding Dimensions	291 x 117 x 8.25 mm
Folding Dimensions	166 x 120 x 14.8 mm
Front side of keyboard	ABS
Back side of keyboard	Aluminium alloy


Features

1. Two working conditions: Bluetooth wireless connection and USB wired connection
2. After connecting to the USB port, you can freely switch between BT connection and wired connection by pressing Fn +  or Fn + . That is to say, one of them is in activated status while the other is in standby status.
3. When unfold the keyboard, it is the same size with ordinary laptop keyboard, easy and comfort typing experience.

4. With two foot stands on both side to keep balance and stable when typing.



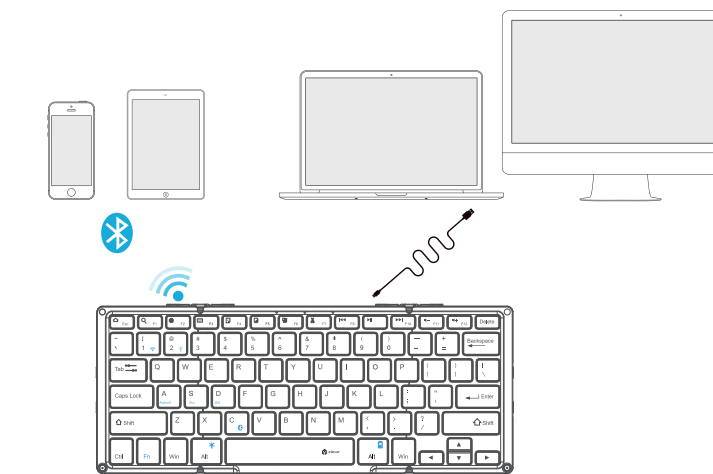
Backlit Function

Press "Fn +  " key to turn on/off backlit function

- 1st time press to turn on backlit
 - 2nd time press to increase backlit brightness
 - 3rd time press to turn off backlit.
- Press "Fn +  "key or "Fn +  " key to change backlit colors.


Operation Instruction


Connection with Your Device



a. Bluetooth Wireless Connection

Step 1. Unfold the keyboard to power on it.

Step 2. Press "Fn +  " keys to enjoy wireless technology lifestyle.

Step 3. Press "Fn +  " keys, the Status Indicator will flash in blue color to enter pairing mode.

Step 4. Activate the Bluetooth function of your device and search other Bluetooth devices. Find the keyboard name (iClever IC-BK05 Keyboard) and click to connect them.


Note:

- 1.If the pairing process is failed, please retry the above steps until success-ful pairing.
- 2.Only one device can be actively paired at one time.
- 3.For other Bluetooth-enabled device, please verify the Bluetooth version and compatibility before attempting to connect to the keyboard.
- 4.After pairing for the first time, your device will connect to the keyboard automatically when powering on the keyboard next time.
















b. USB Wired Connection

Step 1. Unfold the keyboard to power on it.

Step 2. Plug the provided Micro USB cable into this keyboard and connect the other end to your device.

Step 3. Press "Fn +  " keys to successfully connect them, then you can enjoy your wired technology lifestyle.

Keys and Function

Key icon	iOS	Android	Fn on Windows
	Home	Home	Web browser
	Search for	Search for	Search for
	Switch input method	N/A	N/A
	Keyboard display	N/A	N/A
	Select all	Select all	Select all
	Copy	Copy	Copy
	Paste	Paste	Paste
	Cut	Cut	Cut
	Previous track	Previous track	Previous track
	Play/Pause	Play/Pause	Play/Pause
	Next track	Next track	Next track
	Volume down	Volume down	Volume down
	Volume up	Volume up	Volume up
Fn + 	Remaining power capacity	Remaining power capacity	Remaining power capacity
Fn + 	Bluetooth pairing	Bluetooth pairing	Bluetooth pairing

NOTE: After connecting with the device, you must press Fn + relative OS key (A for Android, S for Windows, D for iOS) to select operating system, otherwise some key's function are invalid.

Switching the keyboard's language

iOS 8 or below: Win + Space
iOS 9 or above: Ctrl + Space
Samsung Android: Shift + Space
Google Android: Ctrl + Space
Windows: Win + Space

IMPORTANT

As this is a multilingual keyboard, set the language of the device to your desired language before use.

1. For iOS devices only:
Settings > General > Keyboard > Keyboards > Add new keyboard > Select desired language
2. For Samsung Android devices only:
Settings > Controls > Language and input > Samsung Keyboard > Select input languages > Select desired language
3. For Android devices only:
Settings > Language & input > Physical Keyboard > Set up keyboard layouts > Select desired language
4. For Windows devices only:
Control Panel > Clock, Language and Region > Select desired language

System requirements

- iOS 6.0 and above
- Mac OS X v10.6 to Mac OS X v10.12 and above
- Windows XP / Vista / 7 / 8 / 10 , PC computer with a Bluetooth host
- Android 3.0 and above with Bluetooth HID profile (Smartphones and Tablets)

This keyboard is not compatible with Samsung Smart TV (UE37ES5500,UE55KU6400U,UE48JU6400),Mac mini and Nokia phones.

Power Saving Mode

The keyboard will enter sleep mode after being idle for 30 minutes.
To activate it, press any key and wait for 3 seconds.

How to Charge it

1. Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard. (USB charger is not included)
2. In charging, the power indicator will turn red. Generally, it takes approximately 4 hours for a full charge. (Output: DC 5V/500mA)

FAQ

If you are unable to connect the keyboard to your tablet, please try the following:

1. Starting with a full charge on both devices ensures that process won't be interrupted by a low battery.
2. Check your tablet's Bluetooth is on.
3. Make sure that the keyboard is within the effective operation distance of 33 feet (10 M).

Safety Instructions

1. Keep the keyboard away from sharp objects that could damage it.
2. Do not put heavy objects on the keyboard.
3. To clean the keyboard, gently wipe it by using a moist cotton cloth.
4. Please do not spill coffee, tea or other liquids on the keyboard.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.