

Assembly Instruction Guide

Assembly is a "Skill". Let's make you learn a new skill today if you haven't known already.

- Task Type: Easy to Assemble

MERLION HIGH BACK CHAIR


- Time rquired: 20 Minutes (approx)
- Required Tool: Available in the box
- Person Required: 1 (2 would be great)
- Benefits: A Great Ergonomic Chair (self-assembled)



Visit www.daurban.com for more information



Available Components

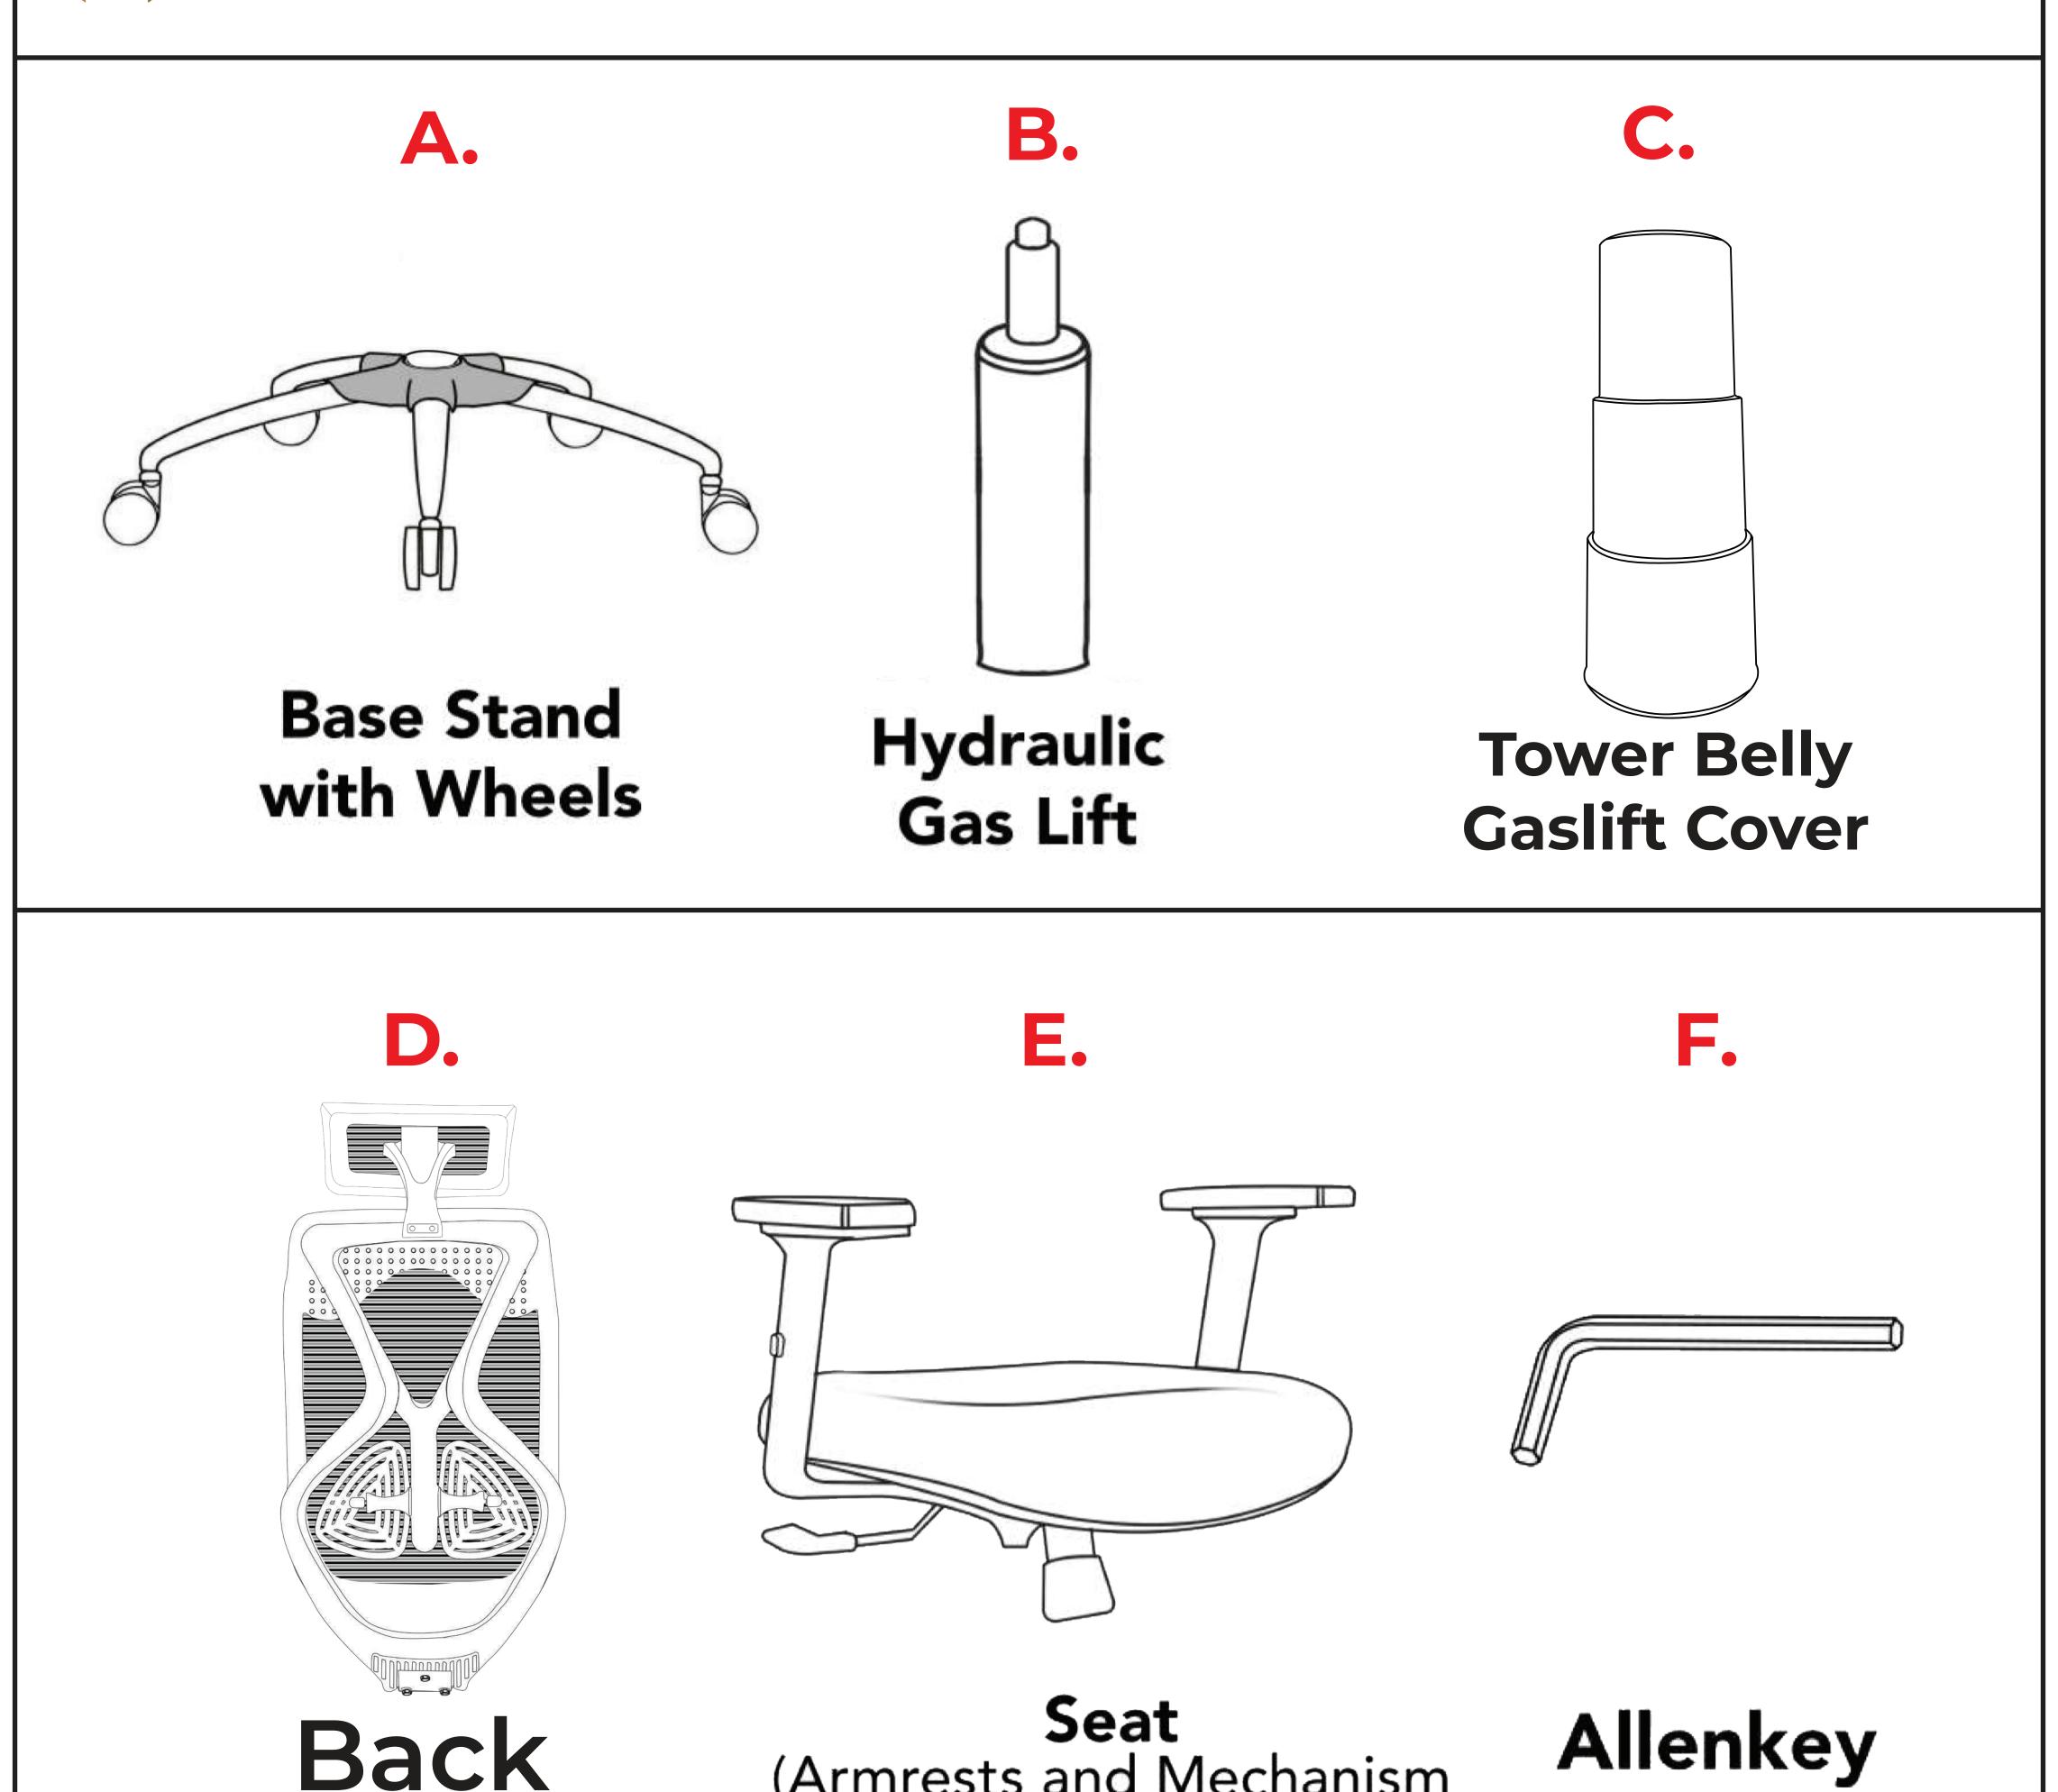

Check if you have receieved all the parts or else contact us immediately by +91-7291008707 / 9560211580

(Armrests and Mechanism


attached)





Let's Start Assembling

Step 1:- Gas Lift Fitting

Required Parts

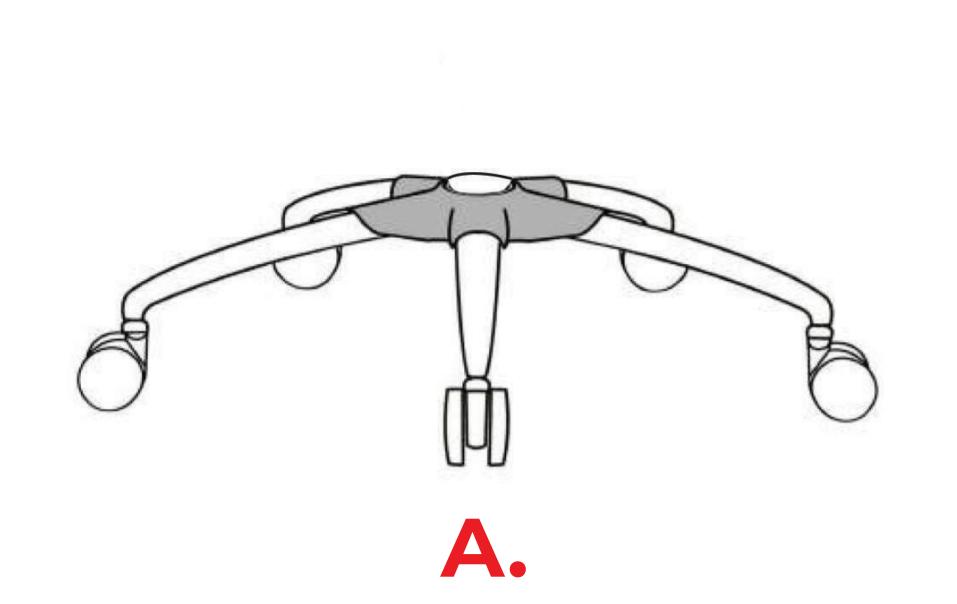


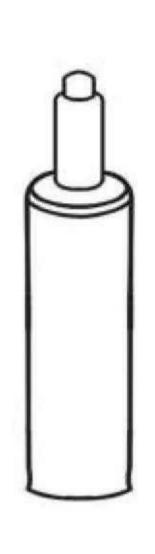

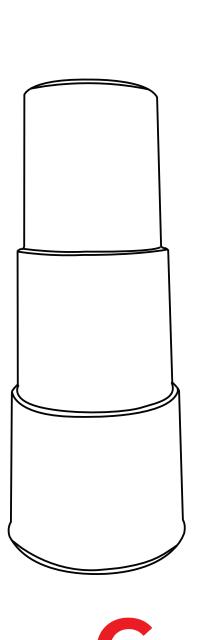


В.

Process

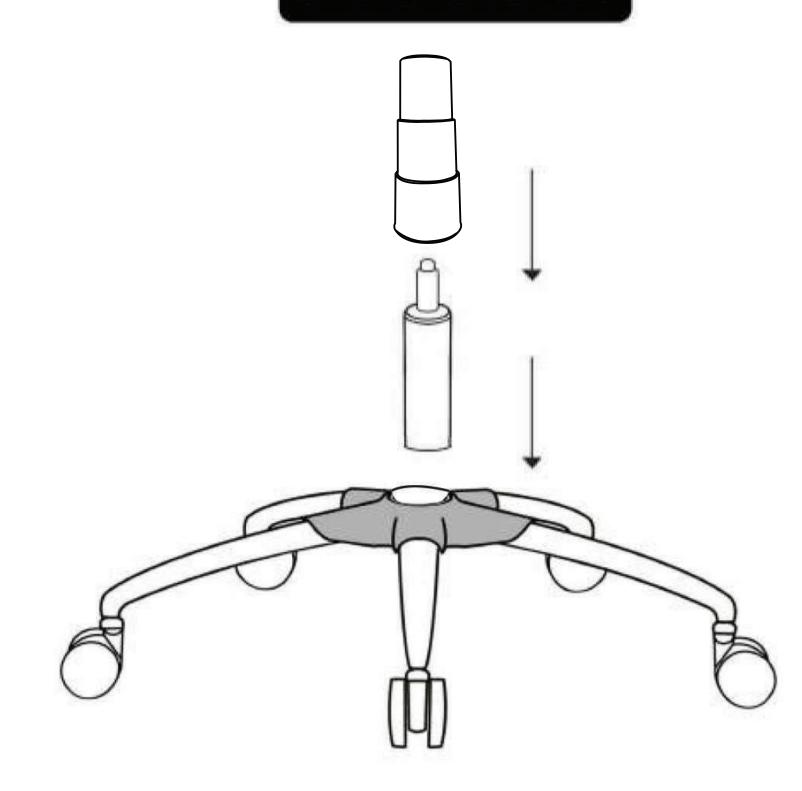

After Connecting (It should look like this)

Base for the Chair is ready

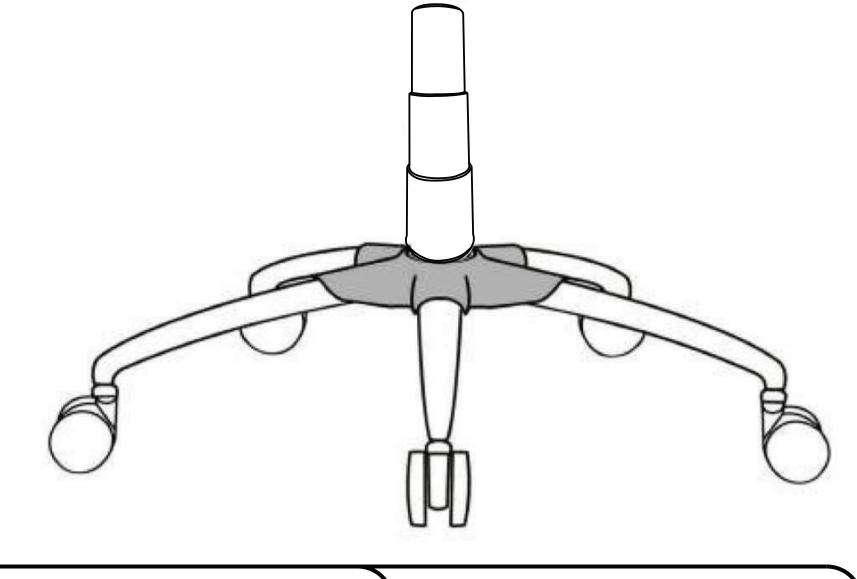


Good Job!


25% Done



Step 2:- Connecting Seat & Back

Required Parts

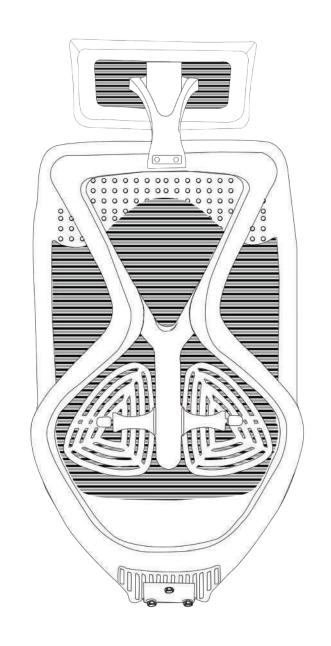

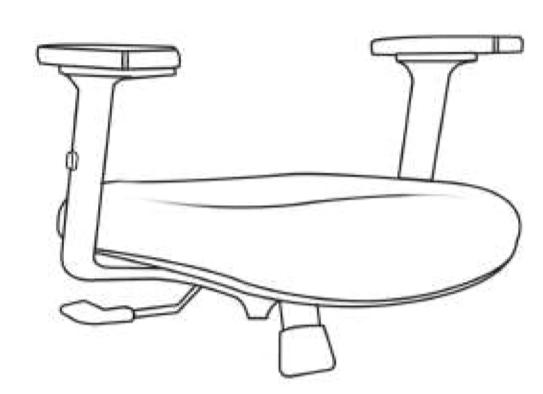




D.


E.

F.

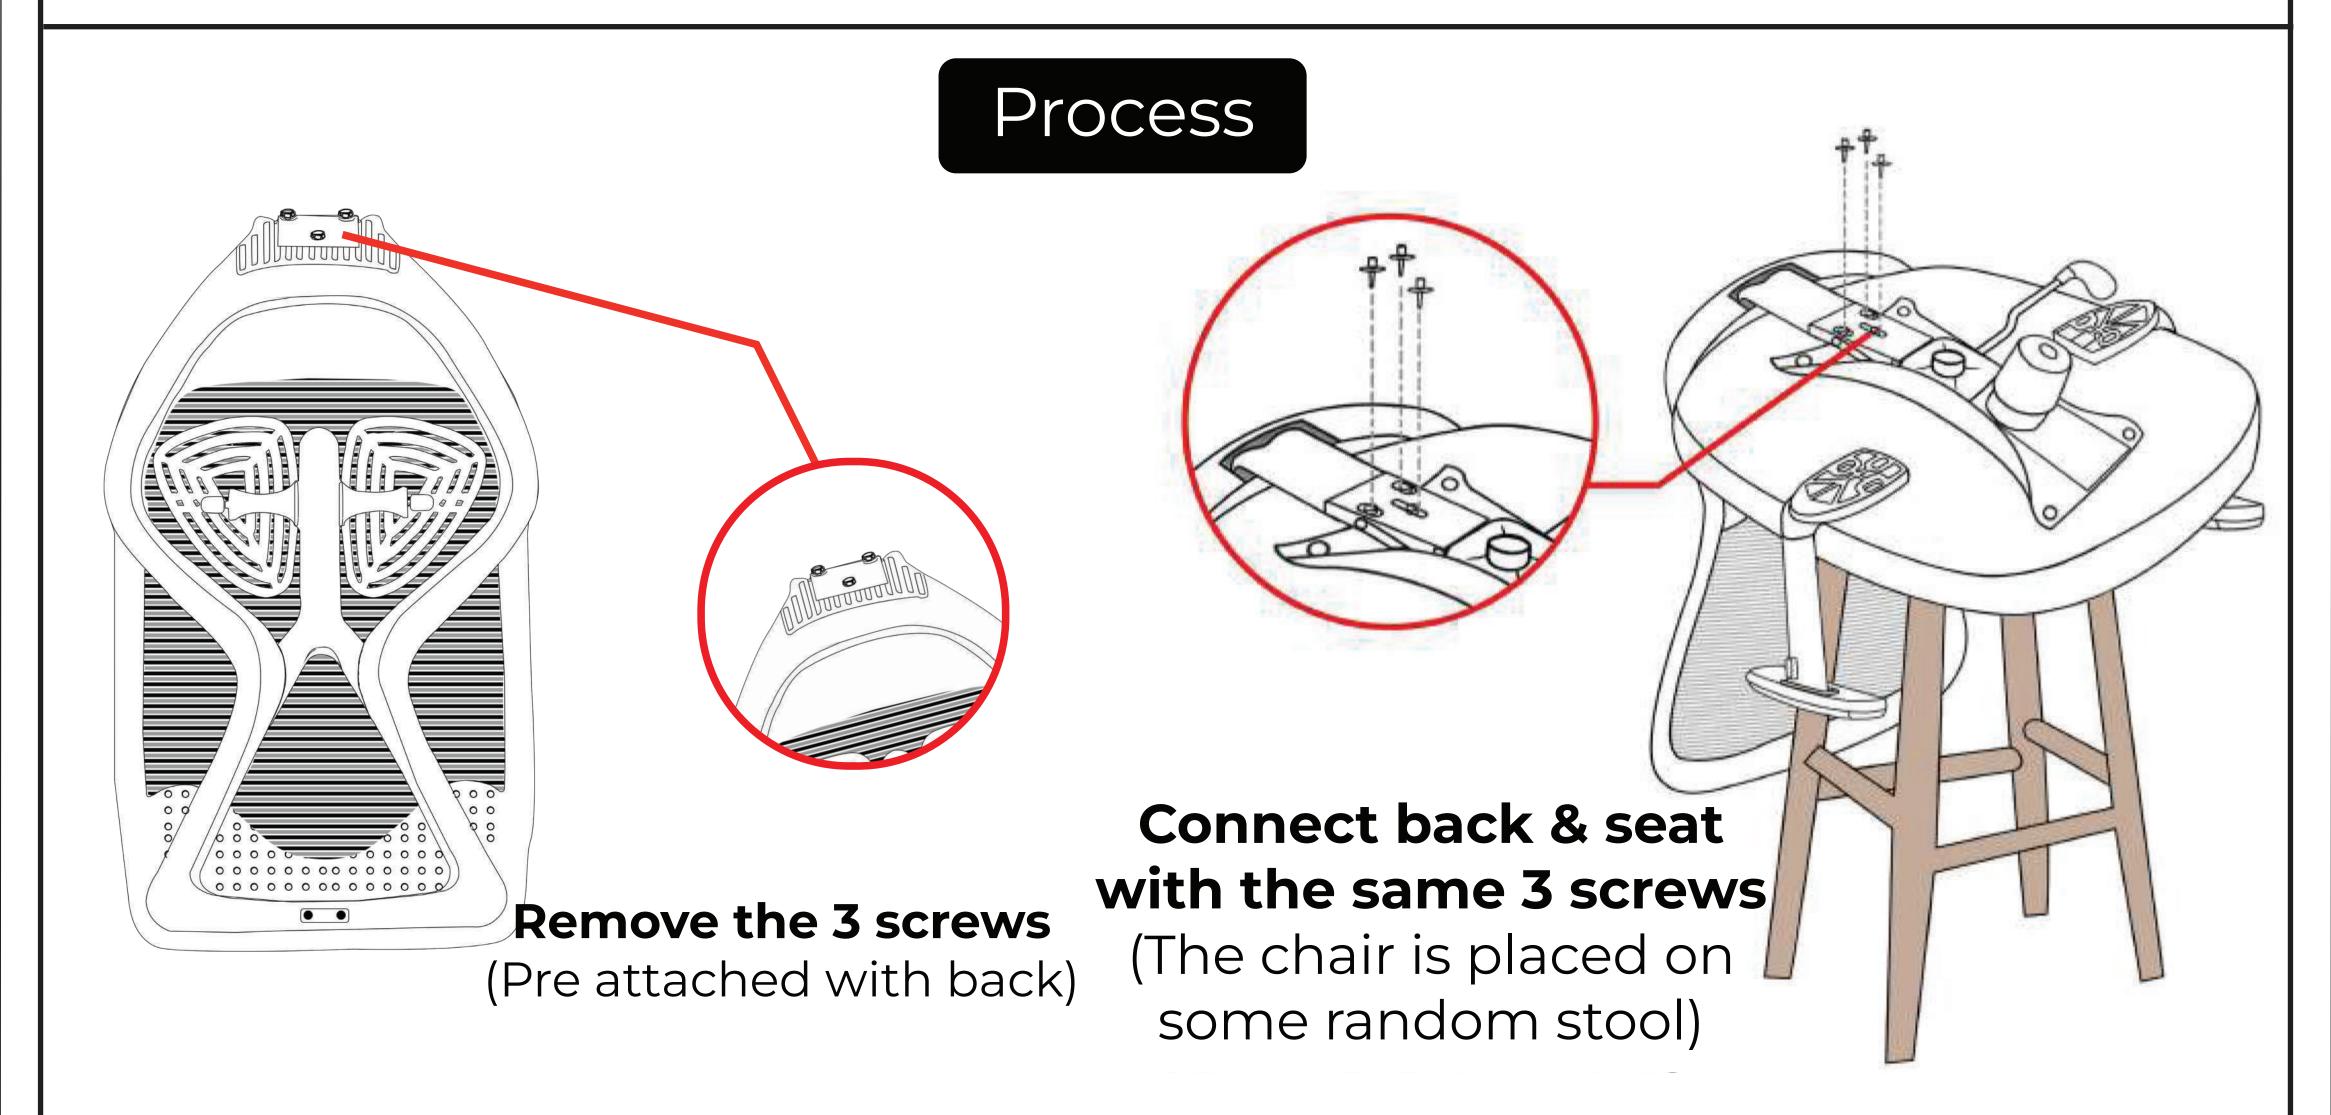

After connecting (it should look like this)

Upperbody of the chair is ready

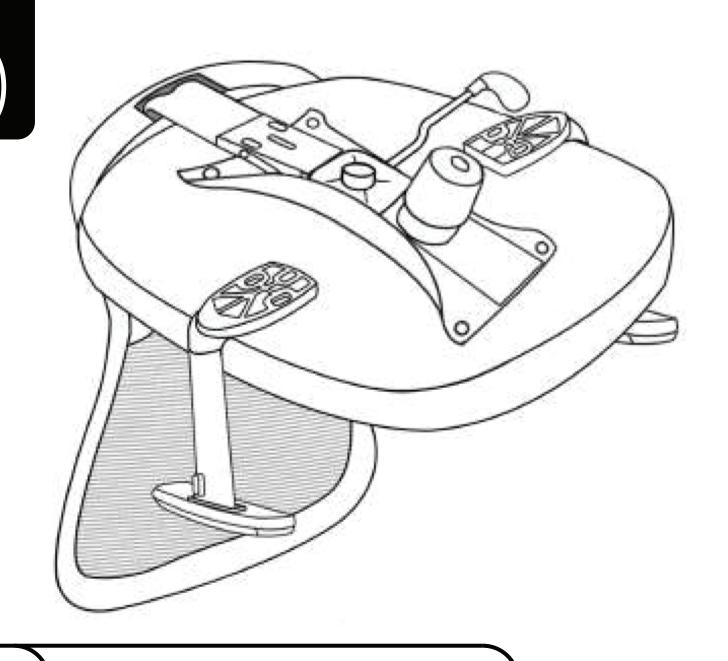


Wonderful


50% Done



Step 3:- Connecting the Upperbody & Base

Required Parts

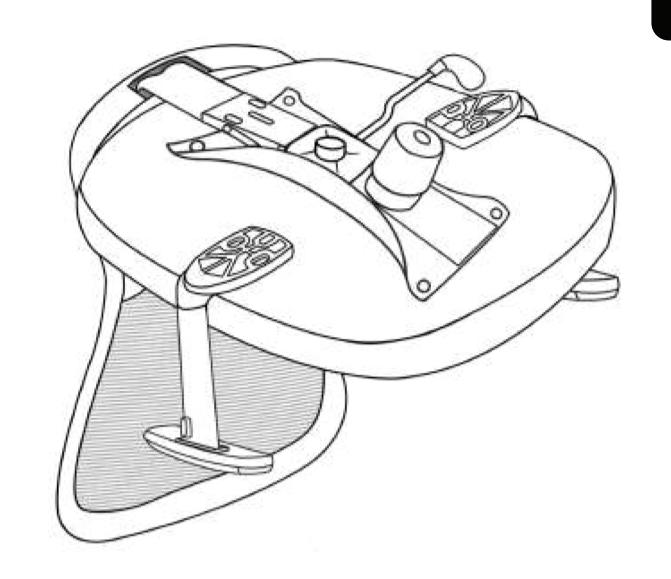


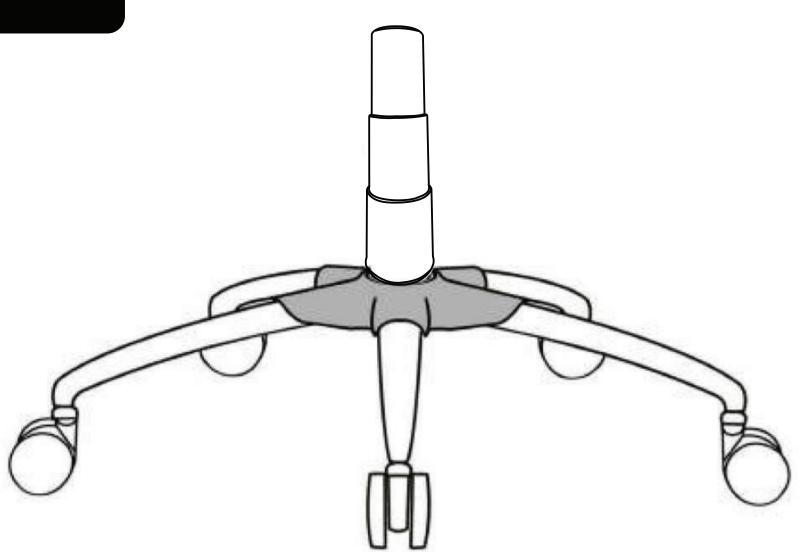

Upper Base

Bottom Base

Process

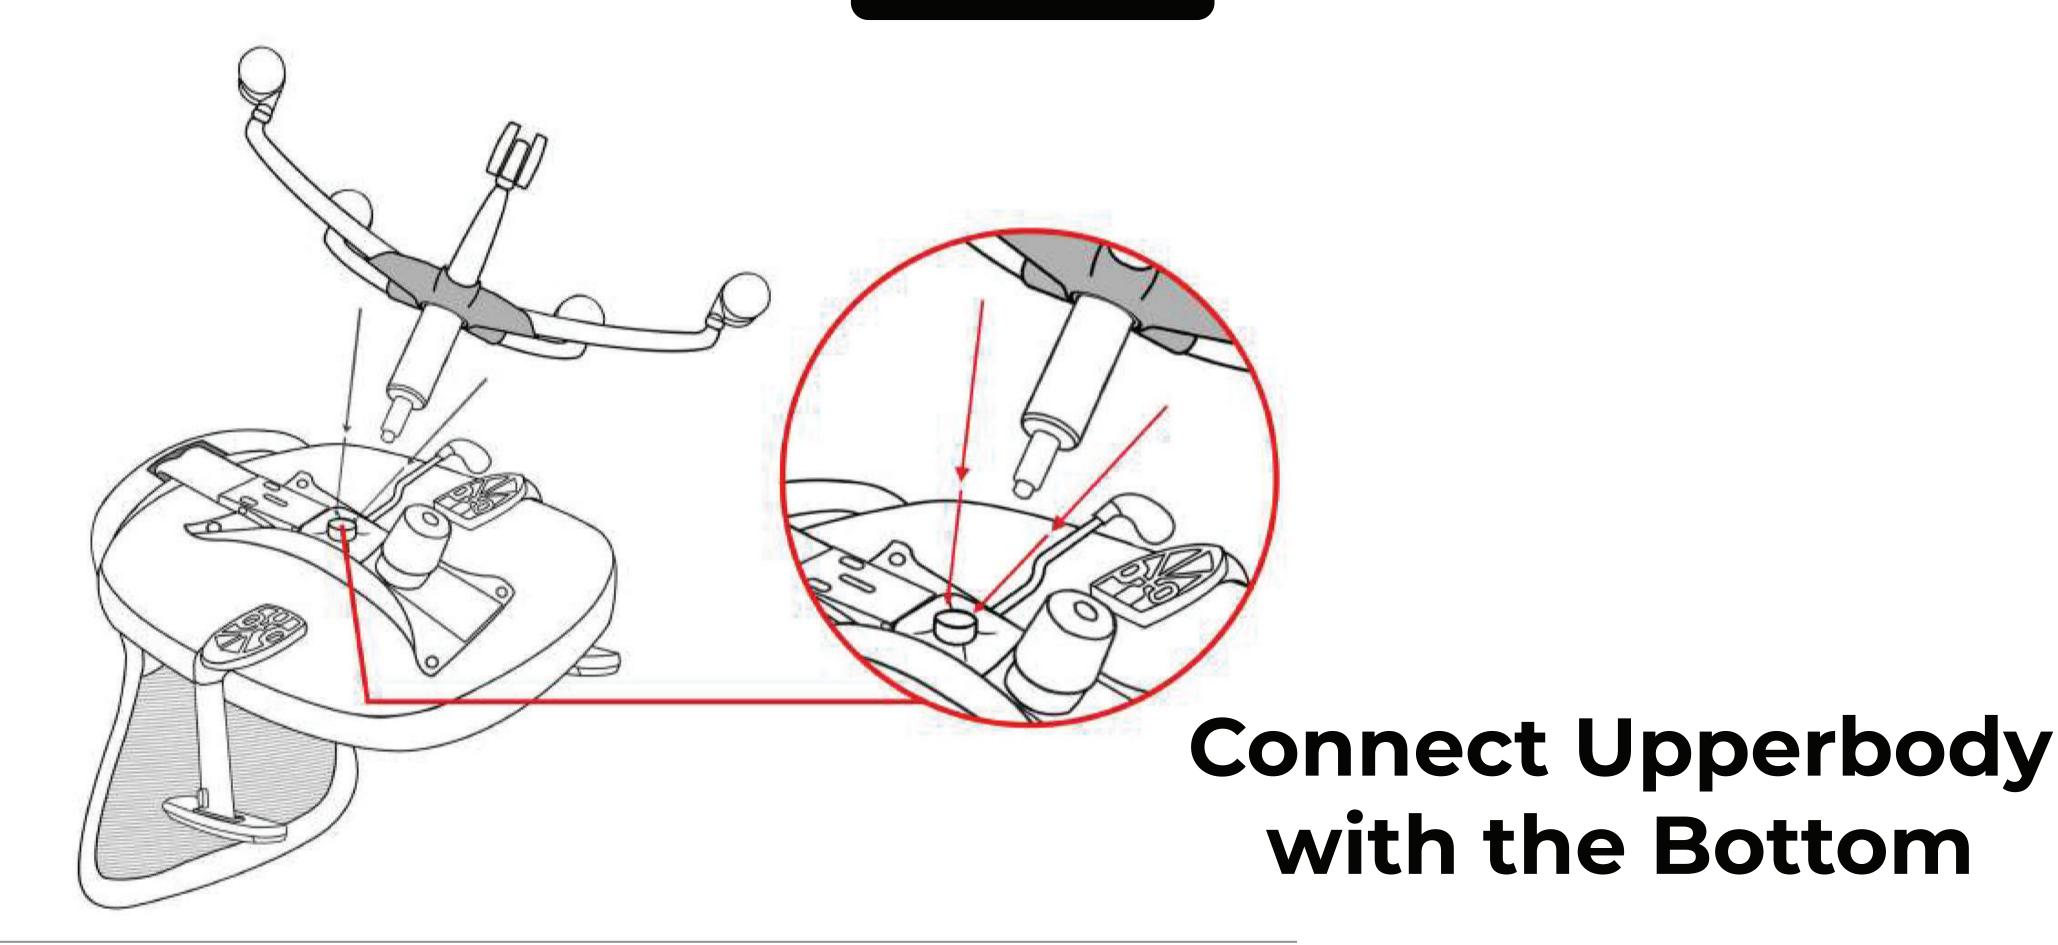

After connecting (it should look like this)



Your chair is ready now!

Congratulations!

100% Done





1. Adjusting the Seat Height:

To raise your seat, vacate the seat & pull up the lever placed below the seat.

To lower the seat, pull up the control handle while you're seated.



2. Backrest Locking:

To let your chair tilt back, pull the control handle out.

To stop your chair from tilting, sit forward, then push the control handle in.



3. Backrest Tension Control:

Turn the tilt knob clockwise to make it harder to rock your chair backward

Turn the tilt knob anti-clockwise to make it easier to rock your chair backward



Note: If your chair won't tilt back, pull out the control handle



Cleaning & Maintenance

- Periodically clean the seat cover using a vacuum cleaner. Use the correct attachment for vacuuming upholstery. Use the setting for upholstery (low suction).
- Use a dry sponge to remove dirt.
- If required, use a slightly damp cloth to clean heavily soiled areas, then wipe dry using a dry cloth.
- Occasionally, thoroughly wipe the frame using a slightly damp cloth. Then dry the frame using a dry cloth.
- Do not use strong cleaning agents or abrasives.
- Do not use the chair unless all screws are securely tightened.
 Screws & Joints should be re-tightened regularly.



Safety & Compliance

- Use care when handling.
- Assemble the chair on carpet to prevent scratching the chair.
- Do not use power tools.

In case of any manufacturing defects, please contact us at: +91-7291008707 / 9560211580 | info@daurban.com

Monday to Saturday: 10:00 AM - 6:00 PM