

# Fiilex


# V70

## User Guide

### Safety Instructions

- DO NOT disassemble V70. This will void the warranty.
- DO NOT install V70 in damp or wet locations.
- DO NOT expose V70 in the strong radio frequency surroundings. This may interfere with the touch panel function.
- DO NOT obstruct the fixture's air vents.
- Only use Fiilex approved power supply and accessories. Failure to do so may damage the fixture.

### Photometrics

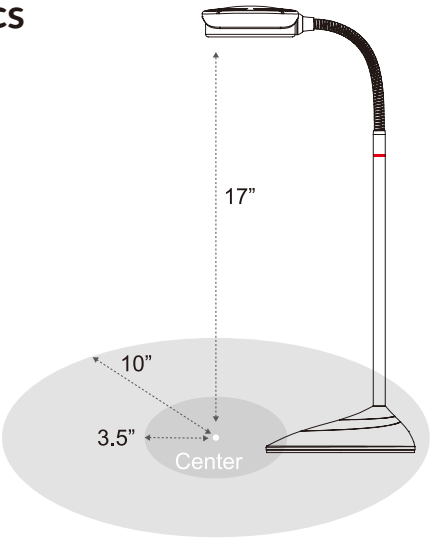


#### Highest Intensity

| Position | 3000K    | 4000K    | 5000K    | 6500K    |
|----------|----------|----------|----------|----------|
| Center   | 1382 lux | 1543 lux | 1595 lux | 1605 lux |
| 3.5"     | 1254 lux | 1403 lux | 1450 lux | 1462 lux |
| 10"      | 666 lux  | 750 lux  | 780 lux  | 795 lux  |

#### Lowest Intensity

| Position | 3000K   | 4000K   | 5000K   | 6500K   |
|----------|---------|---------|---------|---------|
| Center   | 286 lux | 291 lux | 278 lux | 303 lux |
| 3.5"     | 260 lux | 266 lux | 252 lux | 276 lux |
| 10"      | 140 lux | 144 lux | 137 lux | 151 lux |

### Parts Diagram

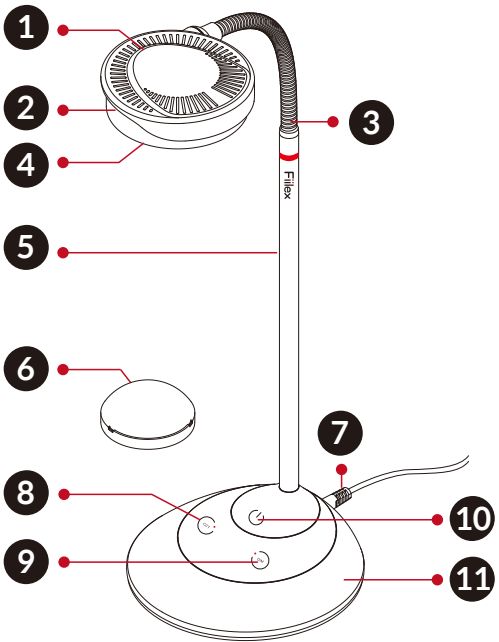

1. Air Vents
2. Lamp Cover
3. Flexible Arm
4. Lens
5. Stand
6. Dome Diffuser
7. DC Plug
8. CCT Touch Panel
9. DIM Touch Panel
10. Power Touch Panel
11. Base