

MAXHUB XBoard V7 Series

Experience the ultimate in video conferencing and collaboration with the MAXHUB XBoard V7 series.

Powered by a Windows PC module, this all-in-one design device seamlessly integrates an intelligent triple camera, cutting-edge audio processing, interactive whiteboarding, and an intuitive meeting launcher, all housed within a single comprehensive collaboration display. This powerful combination enhances the dynamism of meetings and introduces a flexible and creative interaction to your organization.



Professional 4K Display

High color accuracy, $\Delta E \leq 1.5$
Wide color gamut, NTSC 90%
Non-glare technology, 25% haze




Precise Touch

Intelligent Touchscreen Technology
Revolutionary writing experience,
Windows Ink supported



BYOM Anytime

Embrace seamless efficiency
enabled by MAXHUB Share
App or wireless dongle




Smart Whiteboard

Direct annotation
Real-time collaboration




Get Spatial with Sound

16-mic array, 15 meters pick-up
range. Multiple AI-enhanced
audio algorithms




Built-in Speaker

2 x 10W + 20W speaker
2.1 sound channel

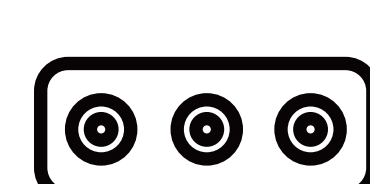

Trident Lens System

50 MP+50 MP+50 MP cameras
5x hybrid zoom, 99° ultra-wide FOV



Peak Performance

Unleash the power with MT71 series
PC module. 12th Gen Intel Processor
with Windows system, stably smooth

Display				
Model	V5550	V6550	V7550	V8650
Screen Size (Inch)	55	65	75	86
Aspect Ratio	16:9	16:9	16:9	16:9
Panel	ADS	VA	VA	IPS
Backlight	DLED	DLED	DLED	DLED
Brightness (Typ.)	350 nits	350 nits	350 nits	350 nits
Glass	Zero parallax	Zero parallax	Zero parallax	Zero parallax
	3mm thickness	3mm thickness	3mm thickness	3mm thickness
	9H tempered	9H tempered	9H tempered	9H tempered
Surface Technology	25% haze	25% haze	25% haze	25% haze
	Non-glare technology	Non-glare technology	Non-glare technology	Non-glare technology
Resolution	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160
Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz
Contrast Ratio	1200:1 (typ.)	5000:1 (typ.)	5000:1 (typ.)	1200:1 (typ.)
Viewing Angle (H × V)	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Color Gamut	90% NTSC	90% NTSC	90% NTSC	90% NTSC
Display Orientation	Landscape	Landscape	Landscape	Landscape
Response Time	8 ms	6.5 ms	6.5 ms	8 ms
Life Time	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours
Operation Hours (Hours / Day)	16 / 7	16 / 7	16 / 7	16 / 7
Display Color	1.07B (10 bit)	1.07B (10 bit)	1.07B (10 bit)	1.07B (10 bit)
Color Accuracy	Delta E ≤ 1.5	Delta E ≤ 1.5	Delta E ≤ 1.5	Delta E ≤ 1.5
Sensor	Ambient light sensor	Ambient light sensor	Ambient light sensor	Ambient light sensor
	Ultrasonic detection sensor	Ultrasonic detection sensor	Ultrasonic detection sensor	Ultrasonic detection sensor
Pixel Pitch	0.315(H) × 0.315(V) mm	0.372(H) × 0.372(V) mm	0.42975(H) × 0.42975(V) mm	0.4935(H) × 0.4935(V) mm
Display Area	1209.6(H) × 680.4(V) mm	1428.48(H) × 803.52(V) mm	1650.24(H) × 928.26(V) mm	1895.04(H) × 1065.96(V) mm

Power				
Power Supply	100-240V~ 50/60Hz 3.5A	100-240V~ 50/60Hz 4.0A	100-240V~ 50/60Hz 4.0A	100-240V~ 50/60Hz 5.0A
Standby Power	≤ 0.5 W	≤ 0.5 W	≤ 0.5 W	≤ 0.5 W
Power Consumption (Typ.)	101 W	140 W	155 W	175 W
Power Consumption (Max.)	320 W	375 W	390 W	465 W

Accessory				
Power Cord	3m × 1	3m × 1	3m × 1	3m × 1
HDMI Cable	1.5m × 1	1.5m × 1	1.5m × 1	1.5m × 1
Stylus	× 2	× 2	× 2	× 2
Wall Mount	WIB6540A	WIB9060H	WIB9060H	WIB9060H
Wireless Adapter	SI07B	SI07B	SI07B	SI07B

Physical Specification				
Dimension (W × H × D)	1269.5 × 792.9 × 102.7 mm	1488 × 914 × 91 mm	1709.4 × 1040.3 × 90 mm	1957 × 1180.1 × 103 mm
Shipping Dimension (W × H × D)	1372 × 875 × 187 mm	1628 × 1005 × 208 mm	1863 × 1140 × 225 mm	2110 × 1283 × 225 mm
Thickness of machine and wall mount	130.5 mm	117 mm	117 mm	130 mm
Wall-hanging Screw Spec	M8 × 25 mm	M8 × 25 mm	M8 × 25 mm	M8 × 25 mm
VESA	400 × 200 mm	600 × 400 mm	800 × 400 mm	800 × 400 mm
Net Weight	26.85 Kg	36.55 Kg	48.45 Kg	59.95 Kg
Gross Weight	32.25 Kg	45.60 Kg	61.10 Kg	74.55 Kg

Connectivity

I/O Ports (Interactive Display)		
HDMI IN × 2	Up to 4K@60Hz, HDCP 2.2, CEC	
USB 2.0 × 1	For system upgrades	
USB 3.0 × 2	For external peripherals	
USB Type-C IN × 1	USB 2.0, supports DP 1.2 input, wireless dongle pairing, and BYOD	
TOUCH 2.0 × 1	USB 2.0 Type B	
AUDIO IN × 1	3.5mm Jack	
AUDIO OUT × 1	3.5mm Jack	
RS232 × 1	Baud rate 9600	
RJ45 IN × 1	Mic in, supports 30W POE, microphone cascade, AES67 protocol	
I/O Ports (PC Module)		
HDMI OUT × 1	Up to 4K@30Hz	
USB 2.0 × 3	For external peripherals	
USB 3.0 × 3	For external peripherals	
RJ45 IN × 1	10M/100M/1000Mbps	
MIC IN × 1	3.5 mm Jack, input for microphone	
PC Module Slot	Module slot × 1	
PC Module System	Windows 10 IOT	
	Windows 11 Pro	
Wi-Fi Slot	Module slot × 1	
Wi-Fi (PC Module)	Wi-Fi 6 supported 802.11ax, 2.4GHz/5GHz	
Bluetooth (PC Module)	5.2	

Camera

Quantity	3	
Resolution	50 MP + 50 MP + 50 MP (Panorama + Telephoto + Telephoto)	
Zoom	2x optical zoom	
	5x digital zoom	
Field of View	99° (Diagonal)	
	86° (Horizontal)	
	69° (Vertical)	
Position	Built-in ejection	
Feature	Personalized presets	
	Auto framing	
	Speaker tracking	
	Multiple-speaker tracking	
	Intelligent focus	

Audio

Sound Channel	2.1
Speaker Power	2 × 10W + 20W

Microphone

Quantity	16-mic array
Pick-up Angle	180°
Pick-up Range	0~15m
Feature	Intelligent audio fence
	AI spatial sound
	AEC (Auto echo cancellation)
	ANC (AI noise cancellation)
	AGC (Auto gain control)


Feature	
System OS	MAXHUB OS 7.0 powered by Windows
Screen Share	MAXHUB Share Support BYOM / Miracast / Airplay / Chromecast / P2P
Device Management	MAXHUB Pivot
Protocol Control	RS232 / IP control Supports integration with Crestron / Extron / Q-sys
Special Features	Microsoft Intune

Touch System	
Touch Technology	Intelligent Touchscreen Technology (infrared recognition)
Touch Point	50 points touch
Object Recognition Range	≥1.5 mm
Accuracy	±0.5 mm
Response Time	≤2.5 ms
Writing Height	≤1 mm
System (Touch Return)	Windows11/Windows10/Windows8/Windows7/Android/Linux/Mac OS X/Chrome OS
Feature	Windows Ink / Direct Annotation / Palm Rejection / Sharp Erase Multi-input Recognition / Handwriting Recognition

Environmental Conditions	
Operating Temperature	0°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	10%~90%RH
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters

Certification			
Safety	IEC 62368-1		
EMC	Class B	WT13	
Environment	Energy Star		
IP Rating	IP5X design standards		

Warranty	
3 years warranty	

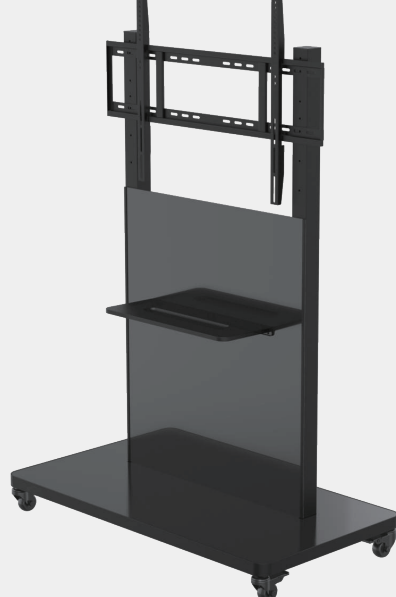Optional Module	
Pluggable PC Module	MT71S / MT71P
Mobile Stand	ST33M / ST23G
Wireless Dongle	WT13
 MT71S / MT71P  ST33M  ST23G 	

Statement
Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance.Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

MAXHUB

Where Inspiration Moves Ahead.