

Switch



- please ensure your Switch system and Lite SE are updated to the latest version
- NFC scanning, IR camera, HD rumble, notification LED are not supported, nor can the system be waken up wirelessly
- status LED can indicate up to 8 players

Bluetooth connection

- 1 – turn the mode switch to **S**
- 2 – press **home** to turn on the controller, LED starts to rotate from left to right
- 3 – press **pair** button for 3 seconds to enter its pairing mode. LED stops blinking for a short moment then starts to rotate again.(This is required for the very first time only)
- 4 – go to your Switch Home page to click on “Controllers”, then click on “Change grip/order” and wait for the connection
- 5 – LED becomes solid and the controller vibrates when connection is successful

wired connection

- go to System Setting > Controller and Sensors > turn on Pro Controller Wired Communication
- 1 – turn the mode switch to **S**
- 2 – connect the controller to your Switch dock via USB cable
- 3 – wait till the controller is successfully recognized by your Switch to play

Android



- please ensure your Android and Lite SE are updated to the latest version

Bluetooth connection

- 1 – turn the mode switch to **D**
- 2 – press **home** to turn on the controller, LED1 starts to blink
- 3 – press **pair** button for 3 seconds to enter its pairing mode. LED stops blinking for a short moment then starts to rotate again.(This is required for the very first time only)
- 4 – go to your Android device's Bluetooth setting, and pair with [8BitDo Lite SE]
- 5 – LED becomes solid and the controller vibrates when connection is successful

Wired Connection

- OTG support is required on your Android device. Please contact your device manufacturer for more details
- 1 – turn the mode switch to **D**
- 2 – connect the controller to your Android device via USB cable
- 3 – wait till the controller is successfully recognized by your Android device to play

Turbo function



- hold the button you would like to set turbo to, then press the **star** button to activate/deactivate the function
- D-Pad, Left stick, Right stick, Home, Select, Start buttons are not included
- turbo function is not available on Switch mode

battery



- |                 |   |                        |
|-----------------|---|------------------------|
| <b>status –</b> |   | <b>LED indicator –</b> |
| low battery     | → | red LED blinks         |
| charging        | → | red LED stays solid    |
| fully charged   | → | red LED turns off      |
- About 20 hours of play time with a 480mAh built-in battery pack, rechargeable with 1 hour charging time
  - controller will turn off in 1 minute with no connection and 15 minutes with Bluetooth connection but no use
  - controller stays on with wired connection

Safety Warnings




- Please always use batteries, chargers, and accessories provided by the manufacturer.
- The manufacturer is not liable for any safety issues arising from the use of non-manufacturer-approved accessories.
- Do not attempt to disassemble, modify, or repair the device yourself. Unauthorized actions may result in serious injury.
- Avoid crushing, disassembling, puncturing, or attempting to modify the device or its battery, as these actions can be dangerous.
- Any unauthorized changes or modifications to the device will void the manufacturer's warranty.

support



- please visit support.8bitdo.com for further information & additional support

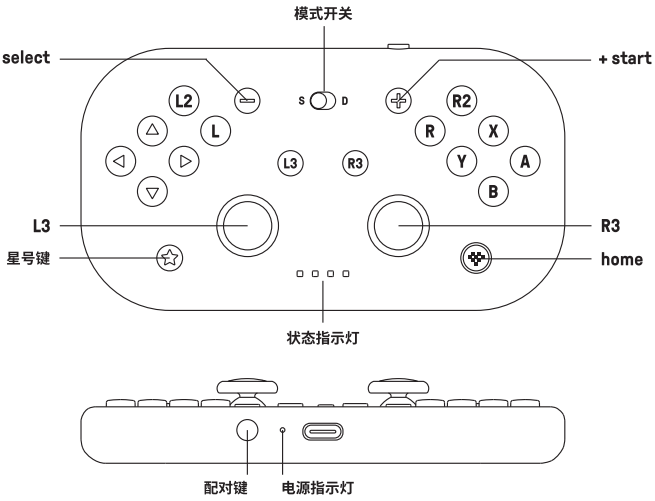

连接 Switch 设备



- \* 使用前请确保 Switch 主机系统与手柄已更新至最新版本。
- \* 不支持 NFC 扫描、红外摄像头、HD 振动、通知灯、唤醒主机等功能。
- \* 支持 1 - 8 号玩家状态灯显示。

蓝牙连接

1. 将模式开关移动到 [S] 位置。
2. 按下 [home 键] 开启手柄，状态指示灯左右滚动闪烁。
3. 按住 [配对键] 约 3 秒，状态指示灯熄灭 1 秒左右滚动闪烁，使手柄处于配对状态。（仅首次连接需要配对）
4. 打开 Switch 主机 [手柄] 选项，选择 [更改握法 / 顺序]，等待手柄与主机连接。
5. 连接完成后，手柄短暂振动且状态指示灯常亮。

有线连接

- \* 使用前请确保 [设置] - [手柄与感应器] - [Pro 手柄的有线连接] 功能已开启。
1. 将模式开关移动到 [S] 位置。
  2. 使用 USB 线缆手柄连接至 Switch 主机的 USB 端口。

连接 Android 设备



- \* 使用前请确保 Android 设备系统与手柄已更新至最新版本。

蓝牙连接

1. 将模式开关移动到 [D] 位置。
2. 按下 [home 键] 开启手柄，1 号状态指示灯闪烁。
3. 按住 [配对键] 约 3 秒至状态指示灯左右滚动闪烁，使手柄处于配对状态。（仅首次连接需要配对）
4. 打开 Android 设备 [设置] 选项，选择 [添加新设备]，点击连接 [8BitDo Lite SE] 手柄，连接完成后，手柄短暂振动且状态指示灯常亮。

有线连接

- \* 使用前请确保 Android 设备支持 OTG 功能，详情请咨询设备制造商。
1. 将模式开关移动到 [D] 位置。
  2. 将手柄连接至 Android 设备的 USB 端口。

Turbo 连发功能



1. 按住需要设置连发的功能键，同时按下 [星号键] 可启用连发功能。再次重复操作可关闭。
- \* [十字键]、[左 / 右摇杆]、[home]、[select]、[start] 键不支持设置连发。
  - \* 连接 Switch 时不支持连发。

电源



- |             |   |                |
|-------------|---|----------------|
| <b>电源状态</b> |   | <b>电源指示灯状态</b> |
| 低电量         | → | 红灯闪烁           |
| 充电中         | → | 红灯常亮           |
| 充满电         | → | 红灯熄灭           |
- \* 配备 480mAh 可充电式锂聚合物电池，充电时间约 1 小时，可持续使用约 20 小时。
  - \* 开机后 1 分钟内未连接，或连接后 15 分钟内无操作会自动关机。
  - \* 使用有线连接时不会自动关机。

安全警示



- \* 请使用制造商的电池、充电器、配件。
- \* 在用户使用第三方的配件时，制造商不能对用户的安全负责。
- \* 请勿自行拆卸、改装或修理设备。
- \* 请勿挤压、拆解、刺穿或尝试改装设备及电池。
- \* 对设备的任意变动或改装，将导致制造商对设备不予保修。

技术支持



- \* 若要进一步了解此产品的更多功能，请前往 support.8bitdo.cn 了解详细信息。

