


EN FT232 USB-to-TTL adaptor 3.3 V/5 V

WPI440



Introduction

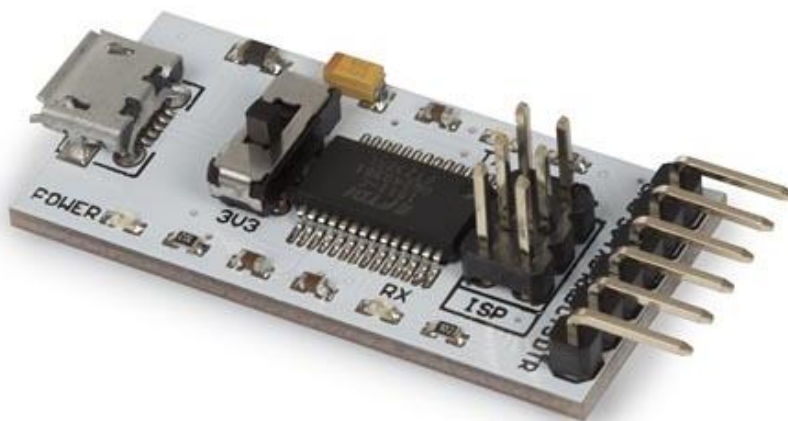

To all residents of the European Union

Important environmental information about this product

This symbol on the device or the package indicates that disposal of the device after its lifecycle could harm the environment. Do not dispose of the unit (or batteries) as unsorted municipal waste; it should be taken to a specialized company for recycling. This device should be returned to your distributor or to a local recycling service. Respect the local environmental rules.

If in doubt, contact your local waste disposal authorities.

Thank you for choosing Whadda! Please read the manual thoroughly before bringing this device into service. If the device was damaged in transit, do not install or use it and contact your dealer.

Safety Instructions



Read and understand this manual and all safety signs before using this appliance.



For indoor use only.

- This device can be used by children aged from 8 years and above, and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning the use of the device in a safe way and understand the hazards involved. Children shall not play with the device. Cleaning and user maintenance shall not be made by children without supervision.

General Guidelines

- Refer to the Velleman® Service and Quality Warranty on the last pages of this manual.
- All modifications of the device are forbidden for safety reasons. Damage caused by user modifications to the device is not covered by the warranty.
- Only use the device for its intended purpose. Using the device in an unauthorized way will void the warranty.
- Damage caused by disregard of certain guidelines in this manual is not covered by the warranty and the dealer will not accept responsibility for any ensuing defects or problems.
- Nor Velleman Group nv nor its dealers can be held responsible for any damage (extraordinary, incidental or indirect) – of any nature (financial, physical...) arising from the possession, use or failure of this product.
- Keep this manual for future reference.

What is Arduino®

Arduino® is an open-source prototyping platform based on easy-to-use hardware and software. Arduino® boards are able to read inputs – light-on sensor, a finger on a button or a Twitter message – and turn it into an output – activating of a motor, turning on an LED, publishing something online. You can tell your board what to do by sending a set of instructions to the microcontroller on the board. To do so, you use the Arduino programming language (based on Wiring) and the Arduino® software IDE (based on Processing). Additional shields/modules/components are required for reading a twitter message or publishing online. Surf to www.arduino.cc for more information.

Product Overview

The WPI440 is a USB-to-serial UART/TTL interface based on the FT232RL chip. It offers an easy way to add USB capability to microcontrollers, e.g. Arduino® or WPB439.

Use this to give your own breadboard Arduino® USB capability for bootloading or downloading sketches.

FTDI FT232RL USB to TTL serial converter adapter module 5 V and 3.3 V for Arduino® (5-3.3 V can be selected by a switch on the board).

RXD/TXD and power LEDs are provided on the WPI440.

The board is over-current protected by a 500 mA self-restoring fuse.

The WPI440 includes a DTR pin needed to auto-reset Arduino® when downloading to your device.


Specifications

- power supply: 5 VDC by USB cable (included)
- microUSB connector
- dimensions: 43 x 17 x 12 mm
- weight: 5 g

Features

- single-chip USB to asynchronous serial data transfer interface
- data transfer rates from 300 baud to 3 Mbaud (RS422, RS485, RS232) at TTL levels
- transmit and receive LED drive signals
- USB 2.0 Full Speed compatible
- switchable 3.3 VDC and 5 VDC operation
- compatible with the WPI439

Example

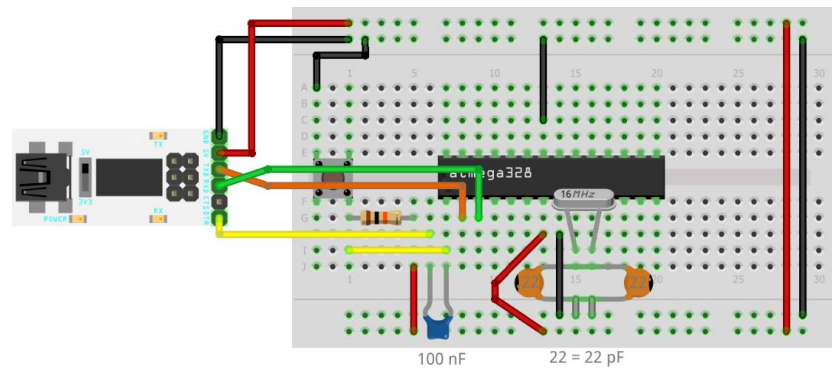

More Information

For more information on the FTDI FT232RL, please visit
<http://www.ftdichip.com/Products/ICs/FT232R.htm>.



whadda.com



Modifications and typographical errors reserved - © Velleman Group nv. WPI440_v01
Velleman Group nv, Legen Heirweg 33 - 9890 Gavere.