


# XR Series International System Design Guide

This fully scalable and flexible panel series meets your most demanding commercial or large residential applications.

## XR International System Design

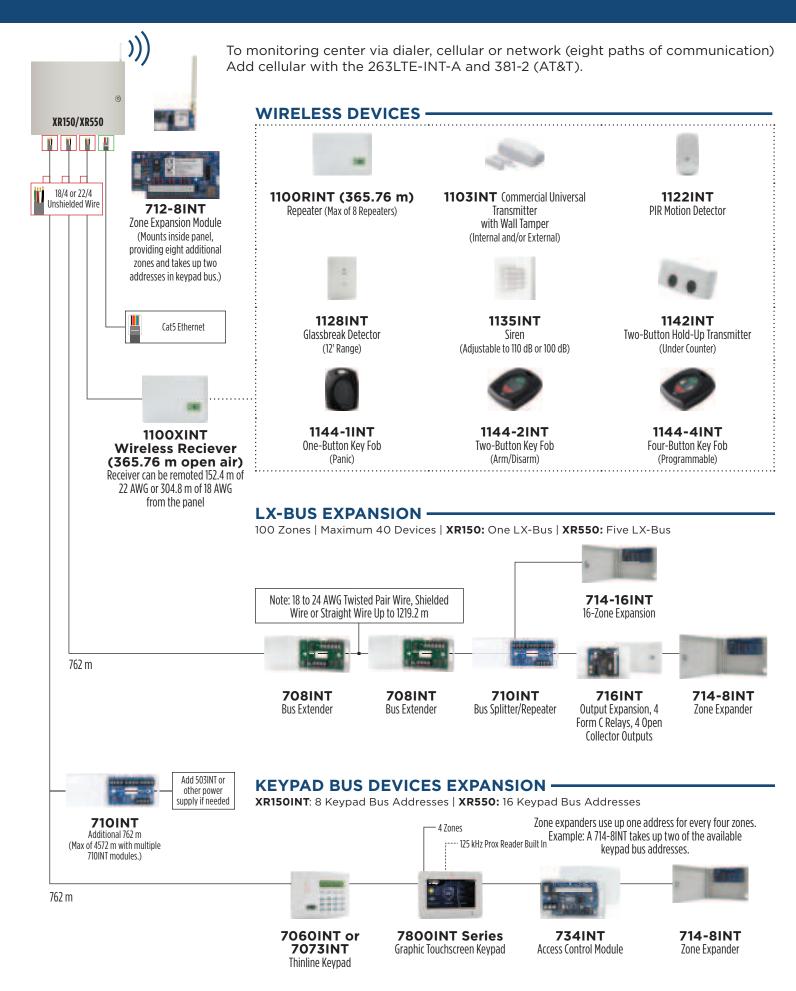

## **XR International System Applications**


or PP-6005B Proxpoint Plus Reader

Request-to-Exit Button or REX Motion

## 4 conductor 22 - 18 AWG non-shielded from control panel keypad bus (734INT) Door Contact 734INT Four-Wire Access Control Module (Supports door strike, reader, prox and door contact.) 12 or 24 VDC power supply, if required Supports up to 255-bit Wiegand reader Example: MP-5365 Miniprox Reader

### 1135 WIRELESS SOUNDER & ZONE

ADD A DOOR OF ACCESS CONTROL -

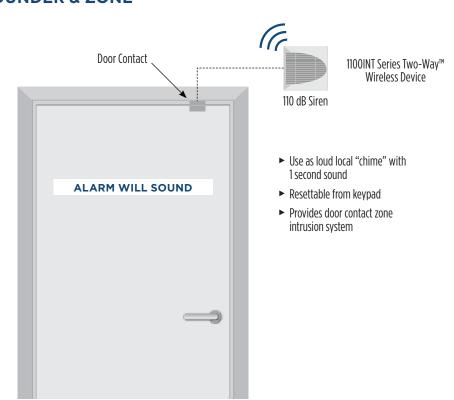

Electronic Lock or Mag Lock


### PANEL SPECIFICATIONS -

	XR150	XR550
Total Number of Zones	142	574
Number of Possible Hardwired Zones	142	574
Number of Possible DMP Wireless Zones	100	500
Number of Areas	8	32
Number of User Codes	10,000	10,000
Number of Door Access Points	8	96
Number of Supervised Keypads	8	16
Auxiliary Power	1.5 Amps	1.5 Amps
Switched 4-Wire Smoke Detector Power	Yes	Yes

### **KEYPAD FEATURES —**

Model	Series	Zones	Normal Backlight	Internal Relay	Wiegand input	Internal Prox	Compatible Panels
7060INT	Thinline	None	Green	No	No	No	XT & XR Series
7073INT	Thinline	Four	Green	Yes	Yes	Yes	XT & XR Series
7872INT	Touchscreen	Four	Blue	No	No	Yes	XT & XR Series
7873INT	Touchscreen	Four	Blue	Yes	Yes	Yes	XT & XR Series

### **MODEL NUMBER DESCRIPTION -**

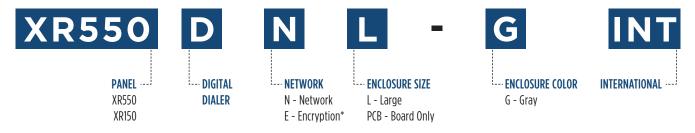

\*Encryption only available on XR550INT panels.

Note: Models ending in PCB indicate it is the PC board and power supply only, no cabinet.

