

AUDIOPHILE ACOUSTICS



B2®

SWEET LIKE DANISH

# RAGE 6 / RAGE 8

## OWNER'S MANUAL

MODEL: RAGE6  
MODEL: RAGE8

PRODUCT ID: RAGESD220  
PRODUCT ID: RAGE8W20





[WWW.B2AUDIO.COM](http://WWW.B2AUDIO.COM) / [WWW.FACEBOOK.COM/B2AUDIO](http://WWW.FACEBOOK.COM/B2AUDIO)





# SWEET LIKE DANISH

MODEL: RAGE6 / RAGE8

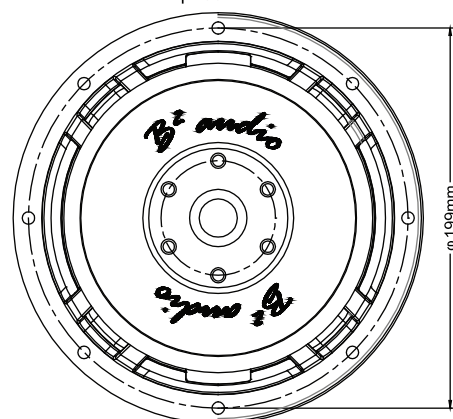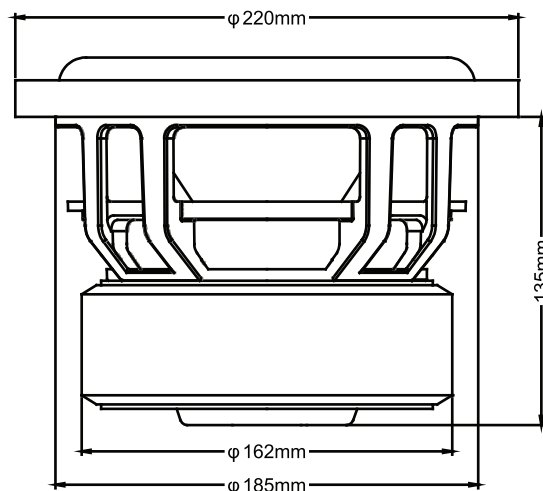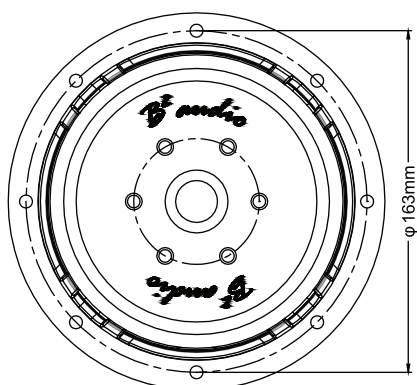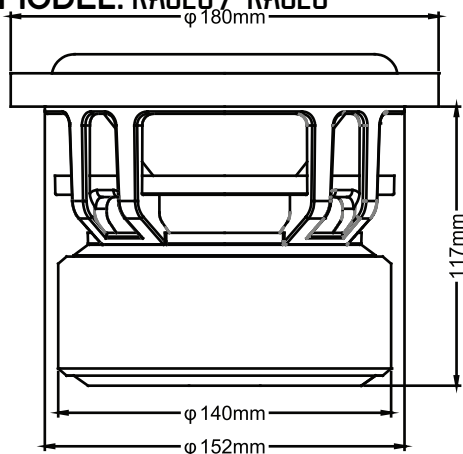

MODEL:	RAGE6D2	RAGE8D2	RAGE8D4
Sensitivity:	86.2 dB	84.1 dB	82.2 dB
Nominal Impedance:	Dual 2 $\Omega$	Dual 2 $\Omega$	Dual 4 $\Omega$
DC Resistance (DC):	1.9 $\Omega$	1.9 $\Omega$	3.2 $\Omega$
Voice Coil Dim:	2"	2"	2"
Power Handling*:	350 Watts	500 Watts	500 Watts
Peak Dynamic Power:	700 Watts	1000 Watts	1000 Watts
XMAX one way (mm):	15	15	15
VAS:	3.7 L	5.8 L	5 L
FS:	44.1 Hz	38.7 Hz	40.9 Hz
QES:	0.53	0.52	0.56
QMS:	6.17	6.09	5.64
QTS:	0.488	0.479	0.5
CMS:	120 $\mu$ m/N	110 $\mu$ m/N	110 $\mu$ m/N
MMS:	102.5 g	145 g	129.7 g
BL <sup>2</sup> /RE:	54.7	69.2	61.3
Magnet:	140 Oz	175 Oz	175 Oz
Displacement:	1.6 L / .056 cu.ft	2.5 L / .088 cu.ft	2.5 L / .088 cu.ft

ENCLOSURE SUGGESTIONS				
TYPE	SEALED	PORTED COMPACT	PORTED	BP 4TH
RAGE6D2	5 L / .178 cu.ft Qtc 0.405	12 L / .42 cu.ft P: 2" L: 9.43" / 24 cm FB: 42 Hz	18 L / .636 cu.ft P: 3" L: 14.17" / 36 cm FB: 42 Hz	3:1 Ratio
	7.6 L / .269 cu.ft Qtc 0.48	15 L / 0.53 cu.ft P: 2" L: 7.16" / 18.2 cm FB: 42 Hz	28 L / 0.989 cu.ft P.A. 7.75 sq.in L: 13.34" / 33.9 cm FB: 38 Hz	3:1 Ratio
RAGE8D2	7.6 L / .269 cu.ft Qtc 0.513	15 L / 0.53 cu.ft P: 2" L: 7.16" / 18.2 cm FB: 42 Hz	28 L / 0.989 cu.ft P.A. 7.75 sq.in L: 13.34" / 33.9 cm FB: 38 Hz	3:1 Ratio

\*It's essential that our speakers are given time to allow the suspension to soften up. Depending on use, this may take several weeks. While this process is undergoing, it is not recommended to apply full amplification power according to the speaker's specs. Once the moving parts have been broken in, the performance of your speaker will increase. Abuse of the unit is **not** covered by warranty. The warranty does not cover (1) Speakers that have been used for SPL purpose in competitions, (2) Damage caused by amplifier clipping or distortion, (3) Exposure to water, oil, solvent & excessive temperatures +/- (5) Cost of shipping to / from authorized service center.