


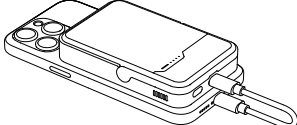

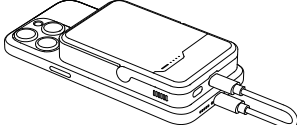

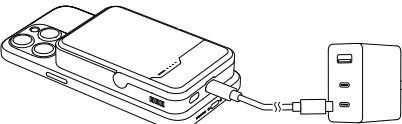
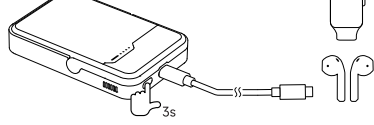
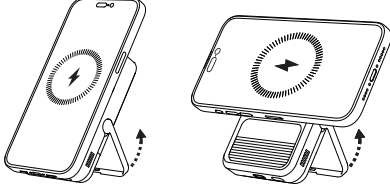












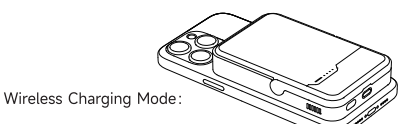
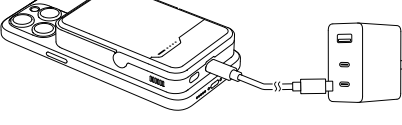
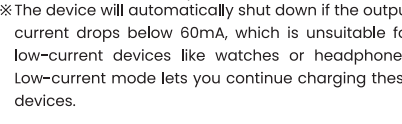
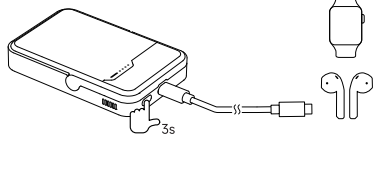






尺寸：60×100mm
材质：80g哑粉纸
颜色：单色
工艺：骑马钉

<div>飓风2 磁吸移动电源</div> <div>产品使用说明书</div> <div></div>	<div>包装清单</div> <div><div> 移动电源 × 1</div><div> 数据线 × 1</div><div> 说明书 × 2</div></div> <div>产品参数</div> <div>产品名称：飓风2磁吸移动电源 产品型号：M2 接口类型：USB-C 额定输入电压、电流 USB-C：5V~3A、9V~3A、12V~2.5A、15V~2A、20V~1.5A 30W (Max) 额定输出电压、电流 USB-C：5V~3A、9V~3A、12V~2.5A、15V~2A、20V~1.5A 30W (Max) 总输出：5V~3A 无线充输出：5W 7.5W 15W 锂电池能量(额定)：10,000mAh 3.6V 36Wh 额定容量：5,500mAh (5V~3A) 转换效率：>70% 产品尺寸：108 × 70.5 × 19.7mm 产品重量：~240g 执行标准：GB 4943.1-2022 GB 31241-2022</div>	<div>使用说明</div> <div>本产品是一款小巧便携、支持30W Max输入输出快充及15W Max磁吸无线充的移动电源。使用高品质锂离子电池及充电芯片，在安全、效率、兼容性等方面均有所表现，同时输入输出时有风扇进行散热。</div> <div><div><div>无线指示灯</div><div>无线充电区</div><div>散热片</div></div><div><div>支架</div><div>开关键</div><div>USB-C</div></div></div> <div>01.产品充电</div> <div>a. 本产品的USB-C接口使用充电器连接，可实现对本产品充电。 b. 支持PD快充功能，可使用主流快充充电器给产品充电。 ※为保证本产品的正常使用，请使用符合本产品输入规格的充电器。</div> <div><div><div>有线充电模式：</div><div></div></div><div><div>无线充电模式：</div><div></div></div></div>	<div>02.产品放电</div> <div>a. 给您的设备充电： • 有线充电模式：用充电线将产品与您的设备连接，即可对设备进行充电。 • 无线充电模式：将设备对准充电器中心的无线充电区，即可自动开启无线充电，此时风扇启动，无线充指示灯点亮。如果设备上未显示充电图标，请调整手机放置方式。 b. 支持设备快速充电： • 本产品的USB-C接口可支持快充功能。 • 只有设备与本产品支持的快充协议相兼容时，设备才会进入快充模式，否则仅支持普通5V充电。 c. 放电显示： 放电过程中随着电量的减少，4颗指示灯将逐一熄灭。当最后一颗指示灯开始闪烁时，代表剩余电量低于10%，请及时给产品充电。</div> <div><div><div>有线充电模式：</div><div></div></div><div><div>无线充电模式：</div><div></div></div></div>	<div>03.边充边放</div> <div>本产品USB-C接口使用充电器连接充电时，同时另一个无线充可对设备进行充电。为确保安全，产品将关闭快充功能，仅支持5V充电。</div> <div></div> <div>04.小电流模式：</div> <div>a. 开启后长按按键3秒后，启动小电流模式，四颗灯依次跑马，依次循环。 b. 长按按键了3秒后，退出小电流模式。 c. 待机2小时后将自动退出小电流模式。 ※ 正常状态下，当输出电流低于60mA左右时，会关闭设备，不利于您的手表、耳机等小电流智能设备充电，启动小电流模式后，可以继续给您手表、耳机等小电流智能设备充电，长按3秒重新开启负载2小时后可关闭小电流模式。</div> <div></div>	<div>05.按键操作逻辑：</div> <div>a. 开机 本产品设有自动检测识别功能，当识别到设备接入时既开机工作。 b. 关机 ·开机状态下，若30秒无设备接入，则自动关机。 ·待机状态下，双击开关键，即可关机。 c. 剩余电量查询 轻按“开关键”，电量指示灯将显示剩余电量，显示约30秒后会自动熄灭。</div> <div><div><div>电量指示灯状态：</div><div><div>●●●● 0%-25%</div><div>●●●● 26%-50%</div><div>●●●● 50%-75%</div><div>●●●● 75%-100%</div></div></div><div>06.支架使用方式</div><div></div></div>	<div>07. 本产品具备FOD功能，当检测到异物时，无线充指示灯闪烁。当移动电源检测到带金属的异物后，蓝灯快速闪烁5秒后熄灭，电源进入关机状态。 ※ 注意:电源请勿与带有磁条或芯片的磁卡（身份证、银行卡等）放置太近，以免磁卡失效。</div> <div></div>	<div> 官方微信</div> <div> 官方抖音</div> <div>官方网站：www.sharge.com 联系方式：400-075-5501 制 造 商：闪极科技（深圳）有限公司 地 址：深圳市龙华区龙华街道 油松社区恒丰小区3号楼新中泰工业园3楼305室</div> <div><div></div><div>RoHS Made in China 中国制造</div></div> <div> 此符号表明本产品不得作为生活垃圾处理，相反，应将其交付给适用的收集点进行电子废物回收。</div>
--	--	---	--	--	--	--	--

<div>ICEMAG 2 POWER BANK</div> <div>USER MANUAL</div> <div></div>	<div>Package Contents</div> <div><div> Power Bank × 1</div><div> Charging Cable × 1</div><div> User Manual × 2</div></div> <div>Specifications</div> <div>Product name: ICEMAG 2 Power Bank Product model: M2 Port type: USB-C USB-C (Input): 5V~3A, 9V~3A, 12V~2.5A, 15V~2A, 20V~1.5A (30W Max) USB-C (Output): 5V~3A, 9V~3A, 12V~2.5A, 15V~2A, 20V~1.5A (30W Max) Wireless: 5W, 7.5W, 15W Total output: 5V~3A Battery capacity: 10000mAh/3.6V/36Wh Rated capacity: 5500mAh (5V~3A) Conversion rate: >70% Dimensions: 108 × 70.5 × 9.7mm Weight: ~240g</div>	<div>Instructions</div> <div>This product supports 15W max Qi2 wireless charging and 30W max 2-way USB-C fast charging. Features high-quality lithium-ion batteries and advanced chips, ensuring excellent safety, efficiency, and compatibility. The built-in fan provides active cooling for better heat dissipation and longer-lasting performance.</div> <div><div><div>Wireless charging indicator</div><div>Wireless charging area</div><div>Thermal pad</div></div><div><div>Stand</div><div>Power button</div><div>USB-C</div></div></div> <div>01. Charging the Product</div> <div>a. Connect the USB-C port of this product to a charger to charge the product. b. Supports PD fast charging; you can use mainstream fast chargers to charge the product. ※ Charger is required to meet the input specifications of this product.</div> <div><div><div>有线充电模式：</div><div></div></div><div><div>无线充电模式：</div><div></div></div></div>	<div>02. Charging Your Device</div> <div>a. Wired and Wireless Charging: • Wired Charging: Connect the product to your device with a charging cable to charge the device. • Wireless Charging: Place your device on the wireless charging area to start charging automatically. The fan will turn on, and the wireless charging indicator will light up. If charging doesn't start properly, adjust your phone's position to better align with the wireless charging area on the product. b. Fast Charging • The USB-C port supports 30W max fast. • Fast charging will only be activated if your device is compatible with the fast charging protocol supported by the product; otherwise, it will only support standard 5V charging. c. Charging Indicator • During charging, the four indicator lights will turn off one by one as the battery level decreases. When the last indicator light starts flashing, the battery level is below 10%, and the product needs to be charged promptly.</div> <div><div><div>有线充电模式：</div><div></div></div><div><div>无线充电模式：</div><div></div></div></div>	<div>Wireless Charging Mode:</div> <div></div> <div>03. Pass-Through Charging</div> <div>When the USB-C port is connected to a charger, you can wireless charge another device simultaneously. For safety reasons, USB-C fast charging is disabled, and only 5V charging is supported.</div> <div></div> <div>04. Low-Current Mode</div> <div>a. To activate, long-press the button for 3 seconds to start low-current mode; the four indicator lights will cycle in sequence. b. To exit, Long-press the button for 3 seconds again. c. The product will automatically shut down if the output current drops below 60mA, which is unsuitable for low-current devices like watches or headphones. Low-current mode lets you continue charging these devices.</div> <div></div>	<div>05. Button Operations</div> <div>a. Power On: • The product powers on automatically when a device is connected. b. Power Off: • If no device is connected for over 30 seconds, the product will automatically power off. c. Check Remaining Power: • Lightly press the power button; the indicator lights will display the remaining battery level and automatically turn off after 30 seconds.</div> <div><div><div>电量指示灯状态：</div><div><div>●●●● 0%-25%</div><div>●●●● 26%-50%</div><div>●●●● 50%-75%</div><div>●●●● 75%-100%</div></div></div><div>06. Stand Usage</div><div></div></div>	<div>07. FOD (Foreign Object Detection) Function</div> <div>If the power bank detects a metal object, the blue light will flash rapidly for 5 seconds before turning off and then shutting down. ※ Note: Keep the power bank away from magnetic cards (e.g., ID cards, credit cards) to avoid damage.</div> <div></div>	<div> Join our Wechat</div> <div> Follow us on Instagram</div> <div>E-mail: info@sharge.com Official Website: www.sharge.com Manufacturer: Sharge Technology (Shenzhen) Co., Ltd. Address: Room 305, 3rd floor, Xinxingtai Industrial Park, Building 3, Hengfeng Community, Longhua Street, Longhua District, Shenzhen, Guangdong, China</div> <div> This symbol indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment.</div>
---	---	---	---	---	---	--	---

变更日期	变更内容	变更日期	内容	备注
				技术要求： 公差: ±0.5mm 印刷清晰无露白及毛刺过膜平滑 不起皱所有材质必须符合RoHS规范

机密文件版权所有为深圳市闪极科技有限公司 抄袭、篡改、擅自外泄将追究法律责任				
闪极科技（深圳）有限公司				
产品型号	版本号	设计师	审核	制表日期
M2	A	周良哲	廖军军	2024/09/02
备注				

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.