

CCT Remote

Model No.: C3

Product Feature


- 2.4GHz wireless transmitting technology , fast transmitting, stable signal and anti-interference
- Control multi devices at the same time
- Dim cct and brightness
- Support Miboxer/Milight 2.4G controller and light series
- Control Distance 30m
- Magnetic installation
- For commerical, hotel and home lighting




Product Parameter

Product Name: :	CCT remote	Working temperature: :	-10~40°C
Model No.::	C3	EMC standard(EMC):	ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-3 V2.3.2
Working voltage:	3V(AAA*2PCS)	Security Standard (LVD) :	EN 61347-2-11:2001+A1: 2019 EN 61347-1: 2015+A1:2021 EN 62493:2015+A1:2022
Standby consumption:	15μA	Radio equipment (RED) :	ETSI EN 300 400 V2.2.1
Transmission:	6dBm	Certification:	CE、EMC、LVD、RED
Protocol:	2.4GHz RF		
Modulation:	GFSK		
Control Distance:	30M		


Remote



Remote Holder



Function

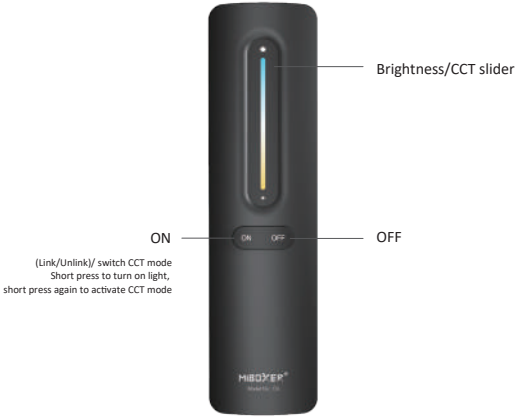

ON

Brightness/CCT slider

OFF

(Link/Unlink)/ switch CCT mode
Short press to turn on light,
short press again to activate CCT mode

Function

Dim Brightness

Indicator is red



Up and down to change brightness

Dim CCT

Turn on light and short press "ON" 1 time, indicator is orange color while CCT mode is activated




Up and down to change color temperature

Link/Unlink

Link

controller must link with remote before using it




turn off light 10 seconds and turn on again



Link is failed if light doesn't flash, please repeat above steps
(Attention: can not link again if remote already finished linking)




short press "ON" 3 times within 3 seconds



link is done once light flashes 3 times slowlyyy

Unlink




turn off light 10 seconds and turn on again



Unlink is failed if light doesn't flash, please repeat above steps
(Attention: no need to unlink if the light never be linked)




short press "ON" 5 times within 3 seconds




link is done once light flashes 10 times quickly

Installation



Remove the sticker on the holder



Stick the holder on the wall and put remote on the holder

Attention:

1. To control MiBoxer/Mi-Light 2.4G series products, Please refer to the product manual for compatibility.
2. Don't use it in humidity or high temperature area, please take out battery if don't use it frequently and keep it in dry or static electricity area
3. Don't use it near metal or strong magnetic area, it will affect signal and lost distance.



Made in China