



A013-V1.0

Wireless Battery-Powered Security Camera Kit

User Manual

Amazon Email: Johnny@hiseeu.com

Whatsapp ID: +8613392810296

Website: www.hiseeu.com

Telephone: +1 917 338 1084

(Available Pacific Time 5:00pm-12:00pm)

*Please read this manual thoroughly before using and keep it for future reference.

Letter of Thanks

Friend of Hiseeu;

Thanks for your trust to purchase wireless security camera from Hiseeu and please accept our sincere Appreciation here.

Thanks again for your great support. With the support, not only can we insist on our dream, but also do our best to develop Hiseeu products. We are looking forward to your suggestions, which would help Hiseeu become a world-leading brand in innovating video surveillance products and solutions front.

Hiseeu CCTV always place customers' needs as our top priority. From raw materials purchasing to product shipping, we carefully test every process. Our qualified camera kit built with advanced chipset and each power plug certificated with CE, FCC and UL for safety. Each camera is strictly tested before shipment.

As the growing company, we will release new products in global market regularly. If you are interested in any Hiseeu new releasing products, please let us know anytime. The VIP customer right for testing Hiseeu new releasing products would always be available to you.

If you are satisfied with our product or service, could you please spend a minute to share your product experience on Amazon? Your precious customer review will help us shape our business to the best and let other customers know more about Hiseeu product and service, your unwavering support and patronage is our motivation to go further.


On behalf of all colleagues in Hiseeu CCTV, we sincerely Appreciate your trust. Please let us know if there is anything we can do to assist you further.

Thanks again and wish you all the best.

Your Sincerely,
All staffs in Hiseeu CCTV

For any questions, please contact us:
Amazon
Email: Johnny@hiseeu.com (For US)
Jason@hiseeu.com (For UK&EU)
Hotline: +1 917 338 1084(For US)
Wechat/WhatsApp: +8613392810296

Packing List




Network Video Recorder

2Pcs C80 Battery Cameras


2Pcs Camera Mounts



32G SD Card




NVR Power Cable




2Pcs Type-C Cables



Network Cable



User Manual



Screws


Device connection

- Step1: Connect the base station to the power supply and the router. Wait for the network light to stay on.
- Step2: Open the rubber cover behind the battery camera, and press and hold the "Power" button for 3s to turn it on.



Note: The camera and the base station have been paired for you, you just need to wait for the channel 1 and 2 indicators to be always on and the camera pairing is successful.

Interface Description

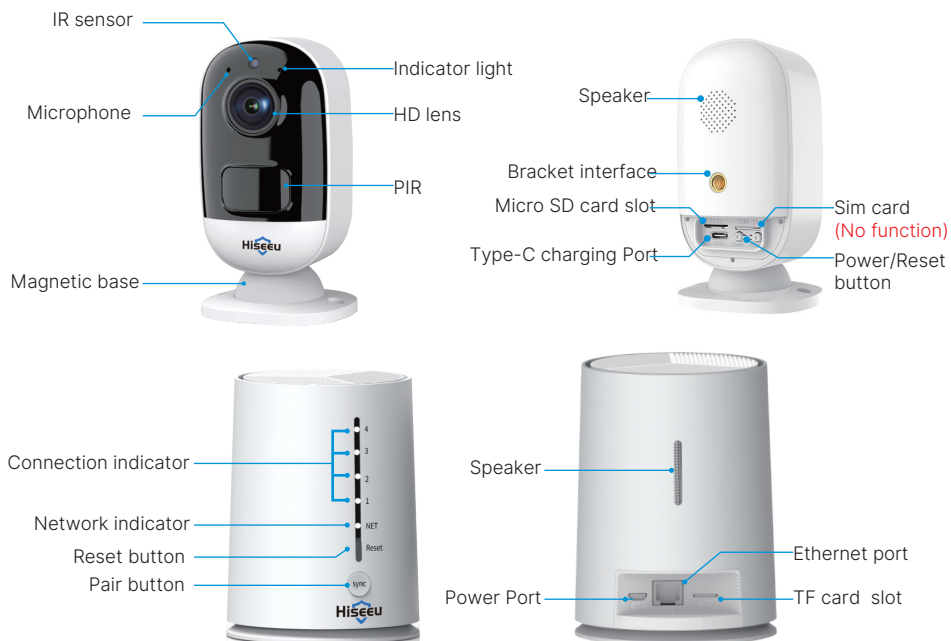

The explanation of LED indicator:

- Blue light + color light is always on: The camera is being previewed. Remotely (privacy light).
- Blue light is on for 1s: The device is turned on or woken up.
- The blue light flashes continuously: Upgrading.
- Blue light is always on: Charging.
- Red light flashes continuously & quickly: Matching code.
- Red light flashes continuously & slowly: Connect to the internet.
- Red light is always on: Low battery.
- The base station needs to be connected to the network cable to provide the network, and does not support WiFi connection.
- Shut down: long press for 3s, the red light flashes quickly.
- Power on: Long press for 3s to turn on the blue light.

Download Eseecloud App and login



Eseecloud





Scan and download App

Search Eseecloud in your mobile App store or Google Play scan the following QR code to download and install.

Note: iPhone requires iOS 9.0 version and above, Android requires Android 5.0 version and above.

Register account and login

Account registration: Click Register on the login interface, enter your mobile phone, and click Confirm. Verify according to the page prompts (Touch the tennis ball to the red dot and drop the tennis ball onto the racket). Finally, enter the verification code you received and the password you set and you are successful.

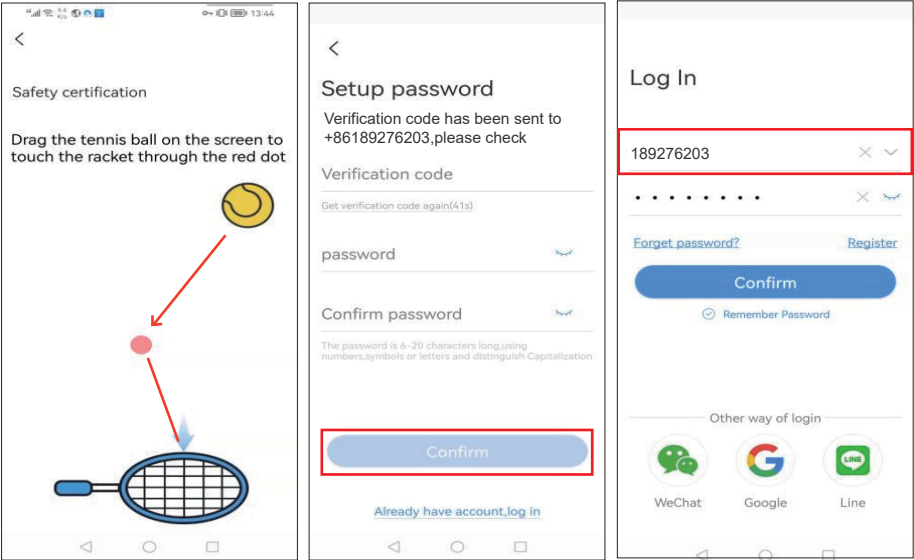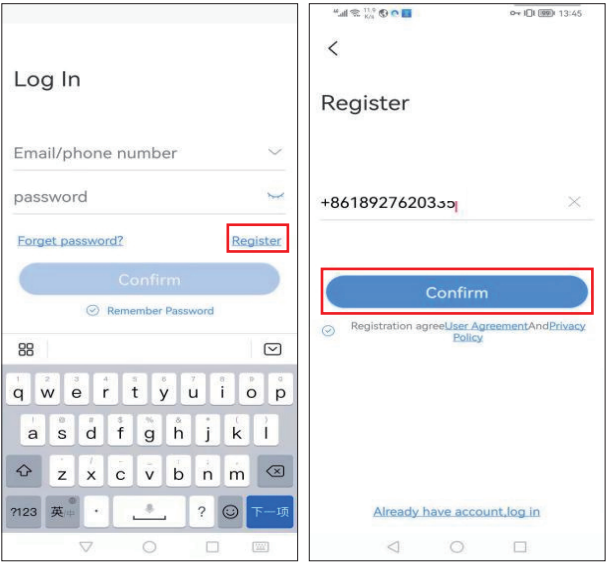


Account login: On the login interface, enter the account phone number/email, and the corresponding password, and click the "**Confirm**" button to log in.


Third-party login: App supports third-party login. Click the third-party social software icon, jump to the App to complete the authorization and log information on the page. Finally enter the verification code you received and the password.

Add the Base Station Kit to the App

1. Open the App and click on the "**Add smart device**" on the upper right corner to enter the scan code interface.
2. Scan the base station's QR code.

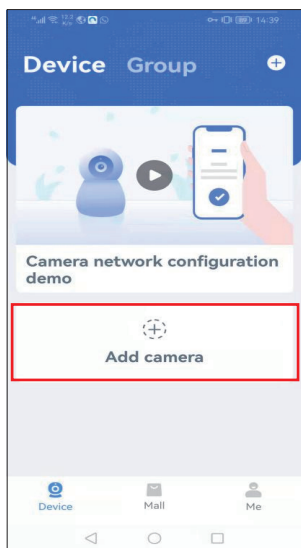


3. On the search device interface, click "**Add**".
4. Set device name, click **confirm**.
5. Click **Complete**.

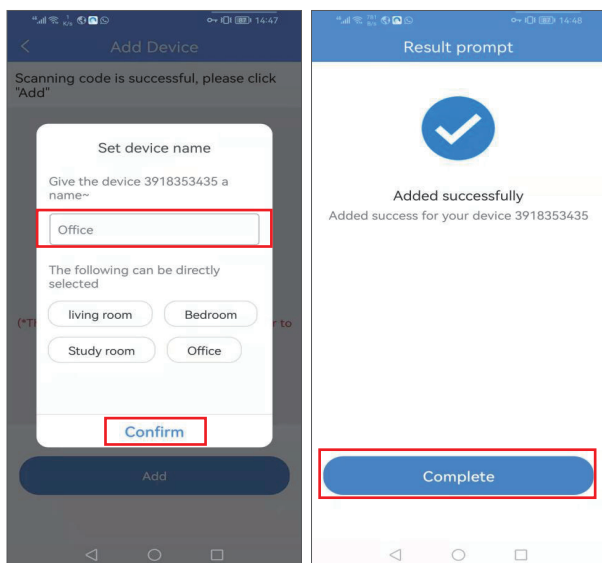


Function and Application

Click , you will see four options.

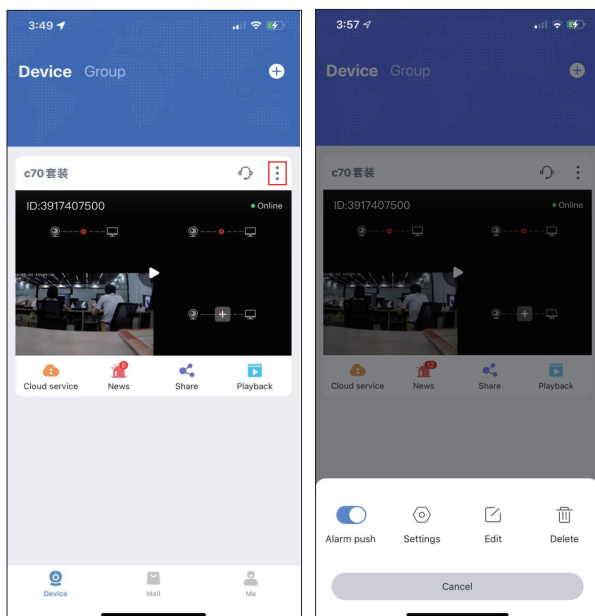


- Alarm Push:** Turn on motion detection notification.
- Settings:** Go to setup Base station interface directly.
- Edit:** Edit device name and view your device password.
- Delete:** Delete the device on cellphone.

Base Station Setup Interface

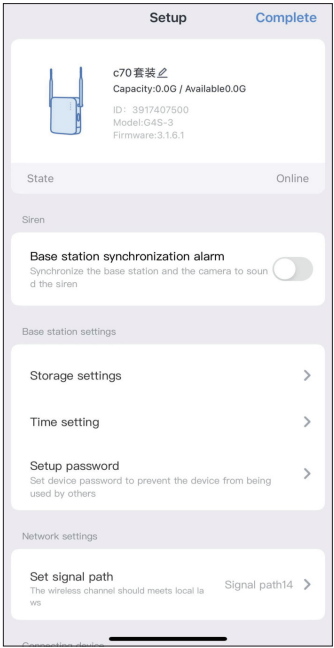


- Base station synchronization alarm:** After the camera is turned on, the base station will emit an alarm sound synchronously when the camera triggers motion detection.
- Storage setting:** Check the status of SD card and storage capacity in the storage settings interface. If you have inserted the SD card, but not recording, please check if the SD card status is normal or the SD card capacity is full, if full, please click format to delete all record, and you also can download video on this interface.

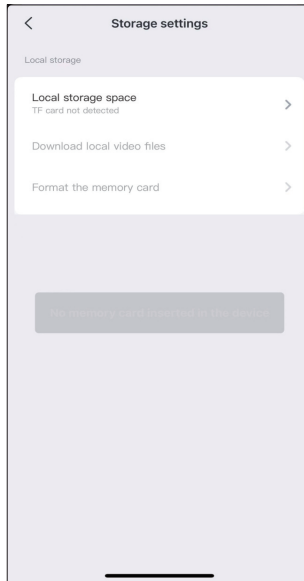


Camera is different from that of the mobile phone. Please click the time synchronization, it will automatically sync to your phone time.


If camera's time still is incorrect, you can select correct time zone by yourself.

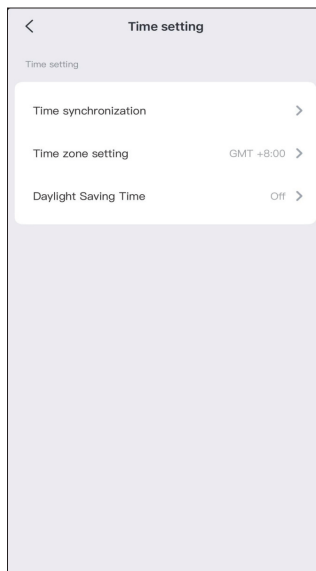


Setup password: You can change the device password here
Set signal path: If your current device communication signal is not good, you can try to use another signal channel

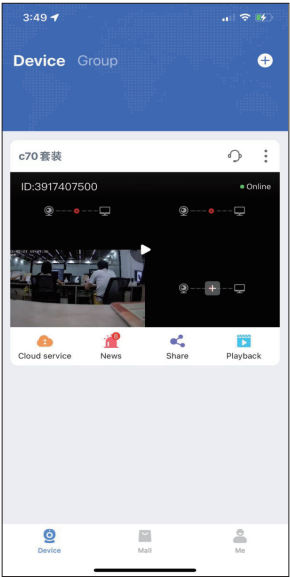





Cloud service: Click it you can purchase cloud service, each device only can be purchased separately.
a. Select device you want to buy, click purchase.

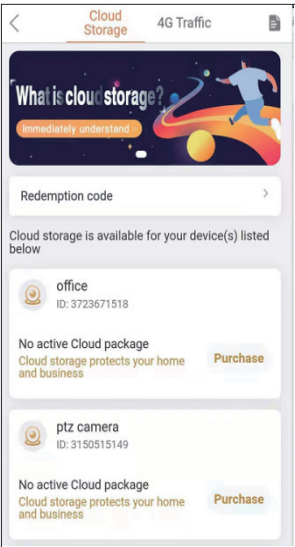


b. You can select monthly renewal, when the validity period of cloud storage expires, the fee will be deducted automatically, or click more package to purchased according to the time period.

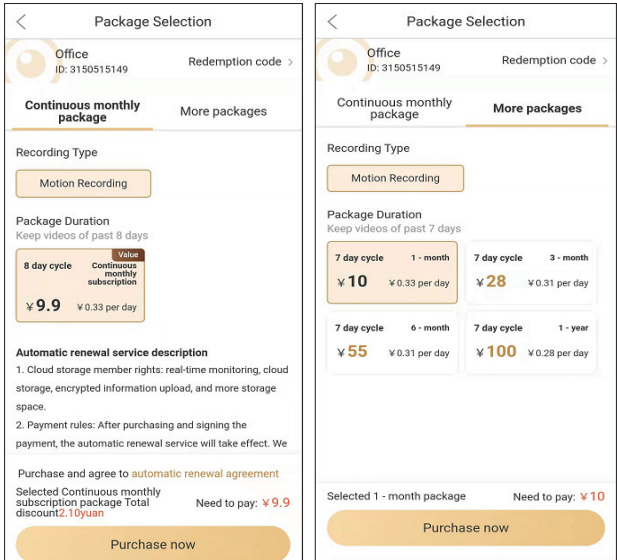


News: you can look at the alarm message and you can select date, time range and motion type, such as all types, motion detection, humanoid detection etc. The alarm message will be overwritten automatically after three days.

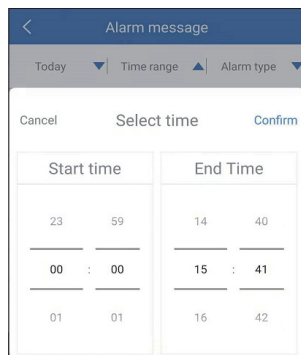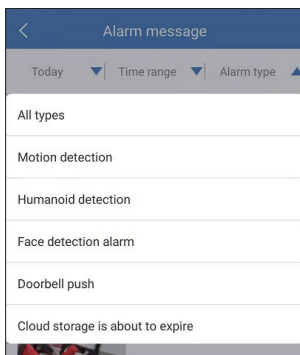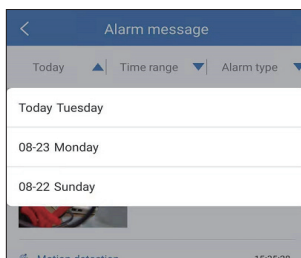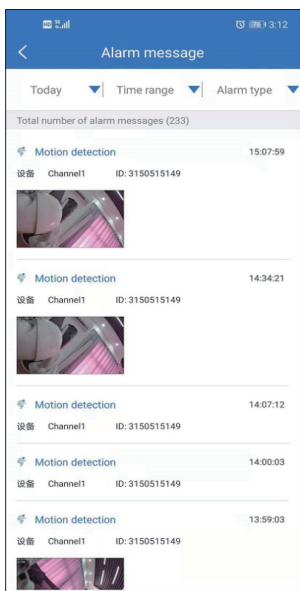

Share: share the device to your friend or family.


a. Click  icon, select share permission and QR code validity.

b. Click finish in the upper right corner to generate a QR code, share the QR code to other people.

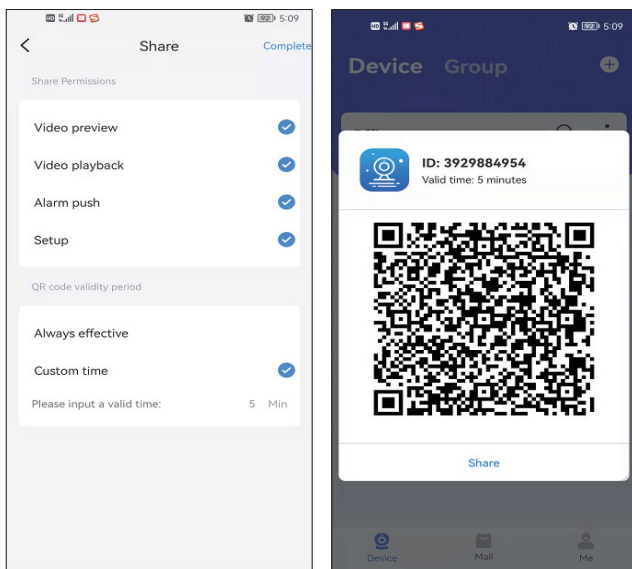


Playback: Watch camera record, but you need to insert the SD card or purchase cloud service firstly.


Please note, just cloud service supports fast forward option, SD card does not support.

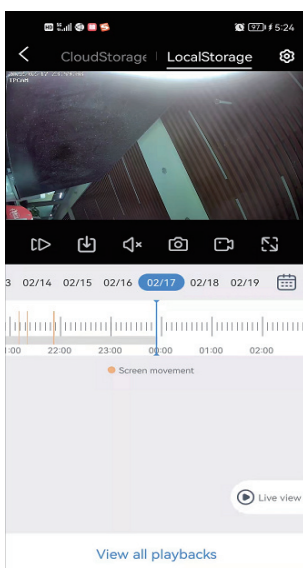

Real Time Video Recording Function

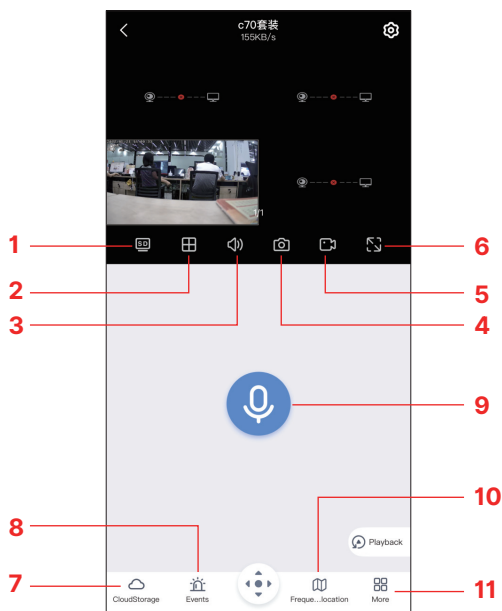


1. Picture quality switching, switch the SD/HD manually.
2. It can display images from four cameras at the same time, or you can choose to display only one camera image
3. Turn on/off sound collection.
4. Screenshot of current screen.
5. Manual recording.
6. Toggle viewing mode
7. Cloud storage and local storage view.
8. View alarm information
9. Microphone, support two-way audio, press to talk
10. Cruise presets(This camera does not support)
11. More:

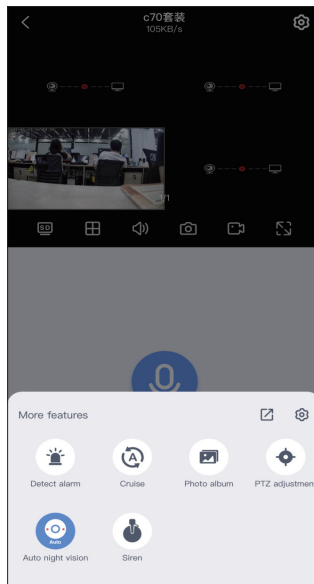


- a. Open Detect alarm icon, When the camera detects an object moving, it will immediately send an alarm message.
- b. Alarm: when you find someone invading, please click the alarm button, and the camera will sound the alarm for 14 seconds to scare away the intruder

Digital Zoom Function

With the digital zoom magnification image clarity will decrease accordingly .

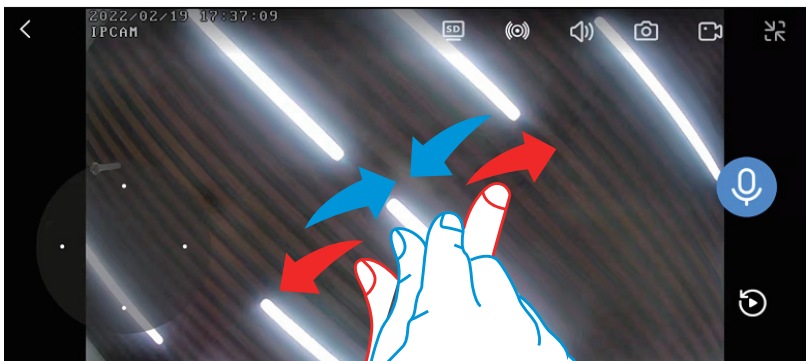


Camera Setup Function

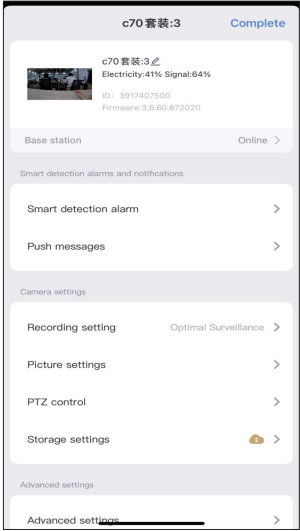


Smart detection alarm: You need to turn it on to receive alarm notifications.

Motion detection sensitivity: if you receive too many wrong alarm messages, please set the sensitivity of motion detection to low.

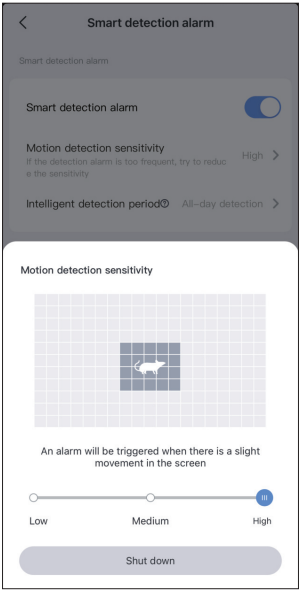

Smart detection Period: There are four options to choose detection period, such as all day, day model (the detection time is from 8 a.m. to 8 p.m) , night model (the detection time is from 8 p.m to 8 a.m) or you can also customize detection time.

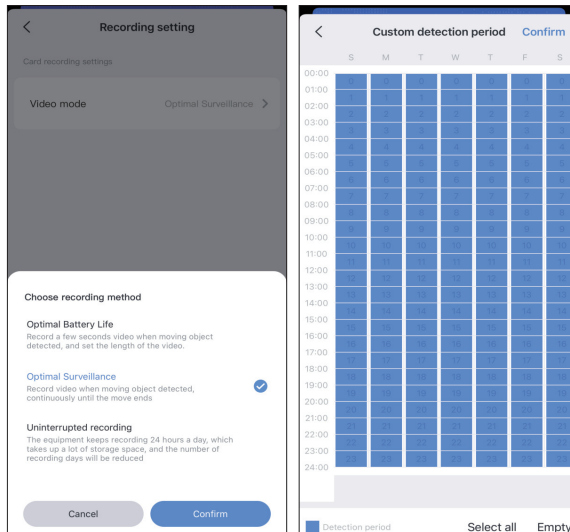


Push messages: After opening, you can also receive alert information push in the background.

Recording setting :


Video mode :

1. **Optimal Battery Life:** Record a short when a moving object is detected and the video duration can be selected
2. **Optimal Surveillance:** It is best to set it to record only when motion detection is triggered.
3. **Uninterrupted recording:** If you need to record all the time, it's best to plug in the camera's power cord and change the device's recording mode to Keep recording.

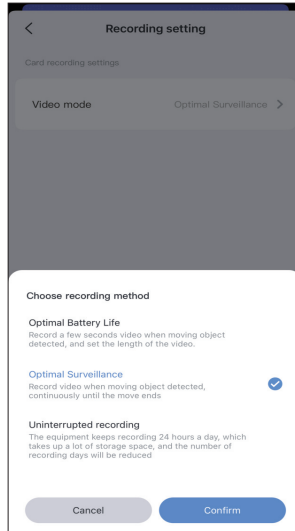


Picture settings:


Three modes: This image currently only supports infrared mode, not full color, so the images are all black and white in low light conditions

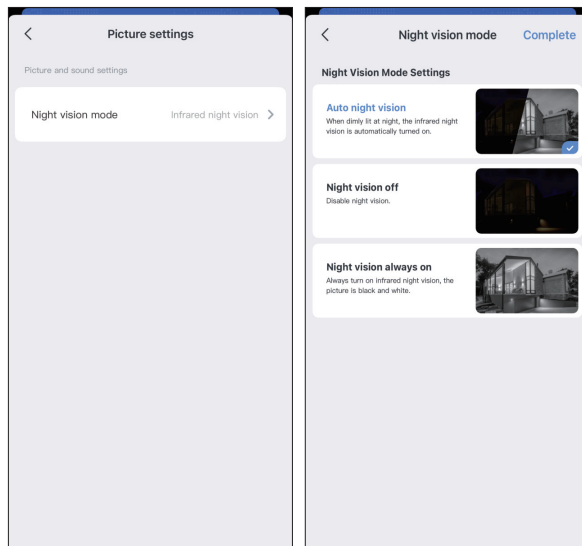

Storage settings

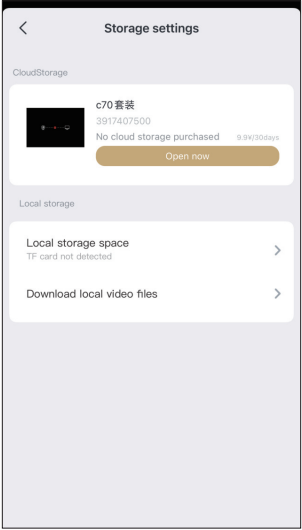

You can view the usage time of cloud storage, the status of SD card and storage capacity in the storage settings interface. If you have inserted the sd card, but not recording, please check if the SD card status is normal.And you also can download video on this interface.

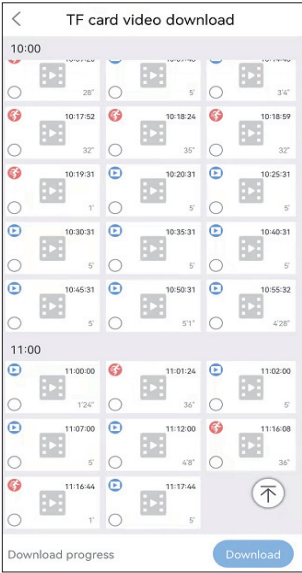

Device share

<

Device share

Complete

Video preview

Video playback

Alarm push

Setup

QR code validity period

Always effective

Custom time

Please input a valid time:

Min

1

2
ABC

3
DEF

4
GHI

5
JKL

6
MNO

7
PQRS

8
TUV

9
WXYZ

0

You can share device permissions with your family according to your needs, each device can share up to 10.

Frequently Asked Questions

Q1: One of the cameras doesn't show an image what should I do?

A: 1. You can try pairing it with the base station after resetting camera. After successful pairing, you can refresh the base station on the app.

2. In a complex environment, please do not install the camera too far from the base station.

Q2: Device offline?

A: Check the network connection of the router; Check the connection between the base station and the router, if you change the router or modify the WiFi password, you need to reset the base station and reconfigure the network; Check if the base station has power, you can plug it in and try again.

Q3: How to display camera image on EseeCloud?

A: After you have successfully connected the base station to the power supply and network cable, you only need to scan the QR code of the base station to view the camera image after the addition is successful.

Q4: Can't receive alarm notification?

A: 1. Please make sure the phone App has notification permission; Please confirm in the App personal center settings to turn on the alarm message push switch; Please make sure to turn on the message push switch in the camera settings.

2. Set the motion detection and detection time and turn on the alarm notification.

Q: How to use SD card to record video?

A: please insert the SD card before powering on; Please check whether the SD card status is normal in the App, if it is abnormal, you can try to format the SD card. (We have installed a 32G memory card in the base station for you)

Note: If the above issues are still not resolved, you can contact us. We will handle the after sales for you, please do not worry. This battery camera kit not designed to operate 24/7, or for day and night live view. It is designed to record motion events and for remote live streaming only when you need it.

