

Quick Start Guide

Pedestal Pump (Pump pictured is typical)




EVERBILT™

Read your manual for installation, operation, and safety information.
This guide neither supplements nor replaces the Owner's Manual.

1. Attach discharge pipe to the pump discharge.
Drill a 1/8" anti-airlock hole as shown.
2. Connect a check valve to the discharge pipe.
Be sure the flow is away from the pump.

3. Ensure Pit/Basin is clear of all debris. Lower the pump into the center of the sump pit or sump basin.
Pit/Basin should be at least 12" diameter and 18" deep.

4. Plug into a GFCI protected outlet.
5. Check the pump's operation by filling the sump pit or basin with water.

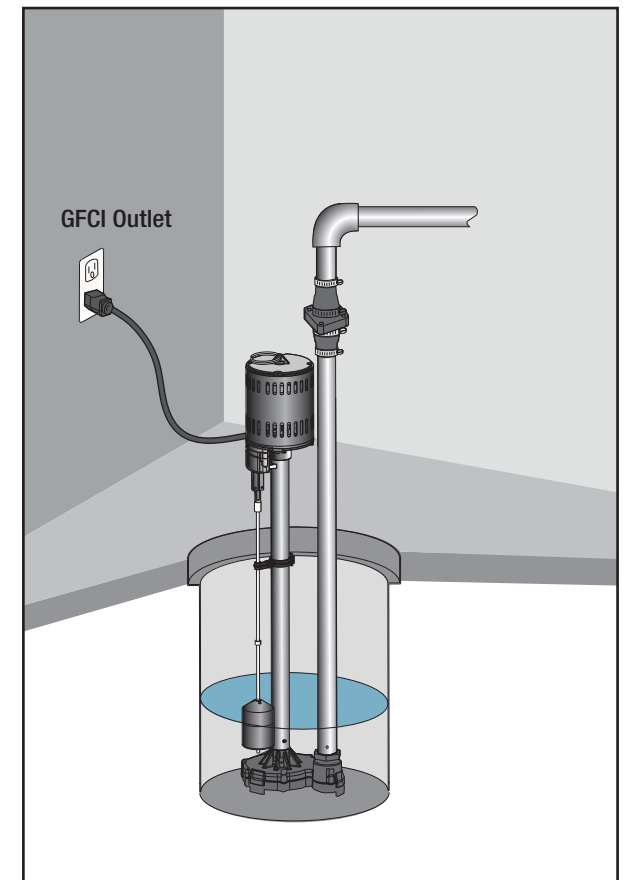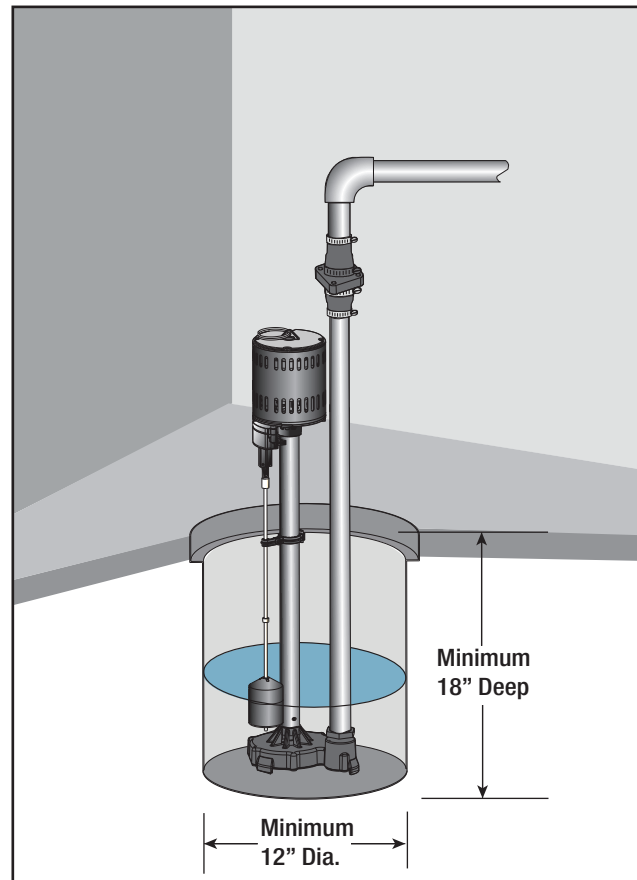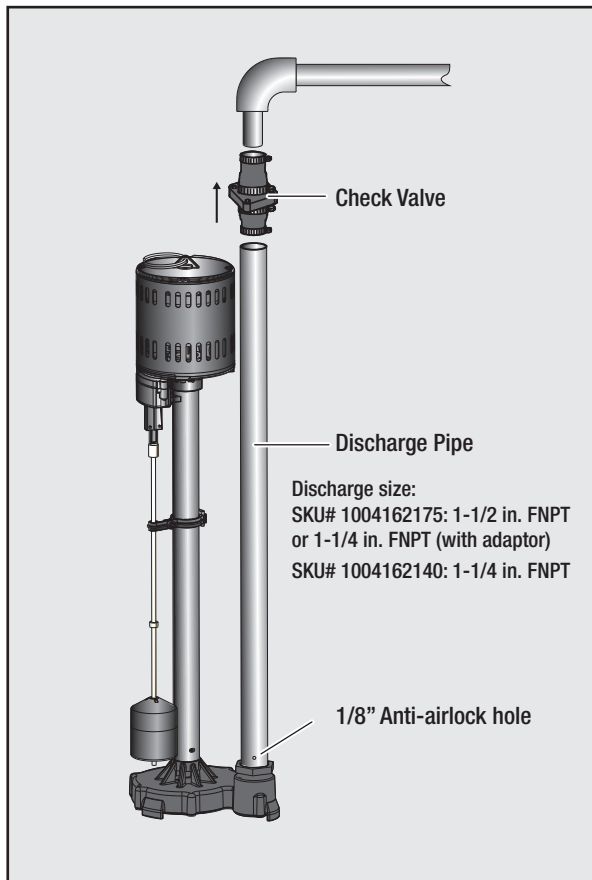

NOTE: The Float Switch comes pre-assembled. Refer to your owner's manual if you need to adjust the ON and OFF position of the float switch.