



GROUND FORCE ELITE

POWER SWITCH REPLACEMENT INSTRUCTIONS

PART # W13112445101

Required Tools: (Not included)


- A. 4 mm Allen wrench
- B. Flat screwdriver

WARNING

 CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 4 mm Allen wrench, loosen and remove the four (4) hex bolts that hold the battery cover. Place your finger under the bolt to prevent the lock nut from falling out of place. Save bolts and lock nuts for re-installation.

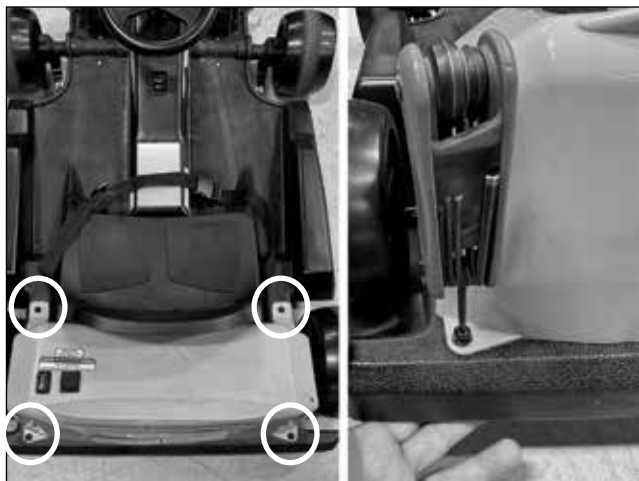

Step 2

Lift and remove the battery cover being careful not to pull the wires from the power switch and charger port. Locate and disconnect the battery from the controller and the blue, red and black wires that connect to power switch.



Step 3

Using a flat screwdriver, remove the glue at the back of the power switch and push the power switch out from the battery cover.



Step 4

When reconnecting your power switch, always make sure to connect the red wire on the middle silver prong and blue wire to the side silver prong. The gold colored prong is only for the black wire from the charger port.



Step 5

To install new power switch, reverse steps 1-4.

ATTENTION: Charge battery 12 hours before using.