


CF10

## BLUETOOTH SPEAKERPHONE

User Manual

Thanks for purchasing the CF10 Bluetooth Speakerphone.  
Please take the time to follow the instructions in this User manual carefully.

### STANDARD ACCESSORIES



CF10 BLUETOOTH SPEAKERPHONE




Type-C Charge Cable




Manual

### STRUCTURE INTRODUCTION

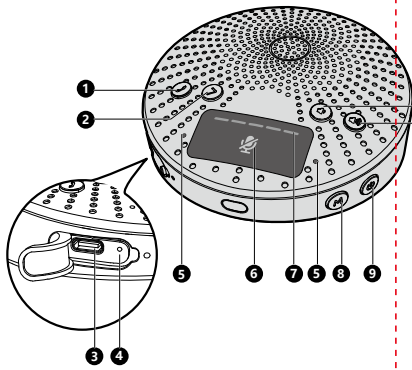

- 1 Short press to answer when a call comes in  
Short press again to hang up  
Long press to reject
- 2 Short press to pause/play  
Double click next song  
Three hits the previous song
- 3 TYPE-C Jack
- 4 Charging indicator
- 5 Mic x 2
- 6 Mute button (touch)
- 7 Status indicator
- 8 Bluetooth pairing key
- 9 On/off function key
- 10 Volume-
- 11 Volume+

### ON/OFF



Long press the **⏻** button for more than 2 seconds to turn on the phone, the status indicator lights up.  
Long press the **⏻** button again for more than 2 seconds to shut down, the status indicator goes out.

#### Automatic shut-down

In the Bluetooth standby state (no device is connected) or the Bluetooth connection is not playing, it will automatically shut down after 5 minutes.

### BLUETOOTH MODE



#### New device pairing:


- Long press the **⏻** button to turn on, automatically enter the pairing mode, the status indicator flashes blue quickly.
- Turn on the Bluetooth of the device to be paired, search and pair "CF10"
- After the pairing is successful, the status indicator will be steady blue.

#### Paired devices connect back:

- Long press the **⏻** button to turn on, the status indicator flashes blue slowly and enters the Bluetooth connection state.
- Turn on the Bluetooth of the device that has been successfully paired before, CF10 will automatically pair back to connect.
- After the connection is successful, the status indicator light will be steady blue.

Note: Long press the **M** button to disconnect the current Bluetooth connection and re-enter the Bluetooth pairing mode;  
Short press **M** to enter back connection mode

### USB SOUND CARD MODE

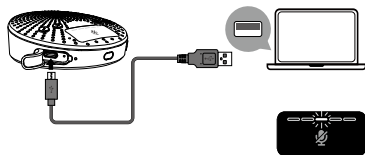

- After power on, connect the speaker interface to the USB 2.0 interface of the computer with a TYPE-C data cable;
- Short press the **⏻** button to switch the USB sound card mode;
- A white light in the middle of the status indicator light is on;
- Volume increase: long/short press the **🔊** button, the white status indicator will increase and light up in turn. All white lights are on when the volume is at maximum;
- Volume reduction: long/short press the **🔊** button, the status indicator white light will turn off in turn, When the volume is minimum, the white light is all off;
- Touch the **🔇** key once to turn off the microphone, and the status indicator will be red and on;

### CALL MODE



Aim the microphone direction  
Get better call effect

- When a call comes in Bluetooth mode, a beep will sound and the status indicator will flash green;
- Short press the **📞** button to answer, the status indicator is steady green, short press the **📞** button again Hang up the current call.
- Touch the **🔇** key once to turn off the microphone, and the status indicator will be red and on;
- Long press the **📞** button to reject

### OTHER

- Factory reset**  
Press and hold the **🔊** key + **🔇** key at the same time for 2 seconds, the status indicator lights red/blue/green/white in turn, indicates that the factory reset is completed;
- Low voltage state**  
Low voltage indication: battery voltage <3.4V, the status indicator flashes slowly in red;
- Charging**  
In the charging state, the charging indicator light will be steady red; The indicator light goes out when the battery is fully charged;

### SPECIFICATIONS

#### Bluetooth

Bluetooth version:	5.0
Working distance:	about 33 feet
Transmission Power:	Class 2,-6dbm ~ -44dbm
Frequency modulation method:	FHSS
Bluetooth profiles:	A2DP, AVRCP, HFP

#### Mic

Type:	2x6MM Array microphone
Sensitivity:	-32dB
S/N ratio:	≥90 db
Automatic Gain Control:	Support
Acoustic Echo Canceller:	Support
Active Noise Cancellation:	Support
Pickup distance:	3m

#### Speaker

Driver spec:	Ø50mm 4Q/ 5W
Output Power:	3.5W
Frequency response:	100HZ-20KHZ
Distortion:	≤0.3% @ 1W

#### Power

Working current:	≤350mA
Working voltage:	3.3V-4.2V
Charging voltage:	DC 5V
Charging current:	≤1.0A
Static standby current under shutdown status:	≤10 uA
Static standby current under power on status:	≤150mA

#### Other

Net weight:	137.0g +/- 3.0 g
Size:	90x90x36mm
Battery capacity:	1000mAh
Charging time:	2.0~3.0H
Playtime at full volume:	3.0H
Call time:	3.0H
Waterproof:	IPX5

IPX5: No harm for 3-5 minutes water flushing, but don't soak!

### LIMITED WARRANTY

Your CF10 Bluetooth speakerphone is covered by a limited warranty. It is backed by 1 year performance warranty against any manufacturing defects in material or workmanship from the date of original purchase. This warranty entitles the purchaser to get the product repaired or replaced under the following conditions:

- ◆The warranty applies to the original purchaser, Proof of original purchase is required
- ◆The warranty does not cover the damage caused by misuse, abuse or improper storage.
- ◆In no event shall be responsible for any direct, incidental, consequential or other damages of any kind.

### WARNINGS AND CAUTIONS

1. To reduce the risk of fire or electric shock, be sure the electric circuits are not overloaded.
2. To reduce the risk of electric shock, be sure not plug the adapter with wet hands.
3. Unplug the power cable if your device is smoking or abnormal and seek professional help from your nearest service center, be sure not detach the device yourself.
4. To reduce the risk of fire or electric shock, do not expose this product to rain or moisture. Liquids can cause a failure and/or a fire hazard.
5. In order to prevent a short circuit, the power cable and audio cable should not be twisted or dragged in case of short circuit.
6. Do not place the speaker near any open flame sources, such as lit candles.
7. The safety temperature of Lithium Battery should not exceed 80°C.
8. Please avoid strong shock and vibration to the screen, do not put pressure on the display surface.

### FCC WARNINGS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.
- FCC RF warning statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.