

MASTERBUILT®

Autolignite 545 Temp Probe Kit Replacement

MB20041124, MB20042724




CAUTION




- Make sure the grill has cooled completely before handling to avoid burns.
- Some components may have sharp edges. Use caution and wear protective gloves to avoid injury.
- Power OFF the grill and disconnect the power from the wall before handling.


Tool needed for access and replacement: Phillips head screwdriver.

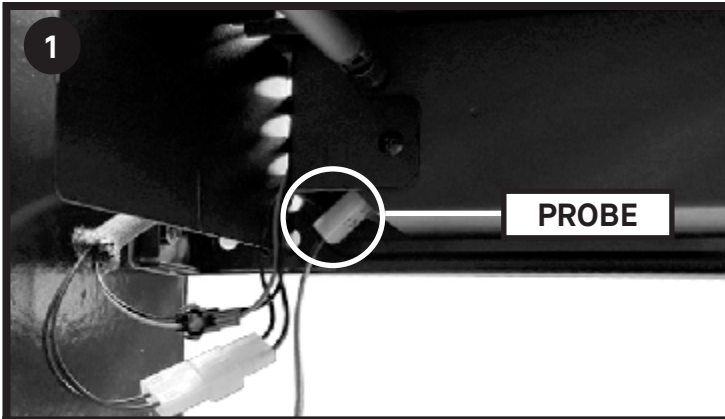


Unplug temperature probe from the controller
(this is found under the side shelf).

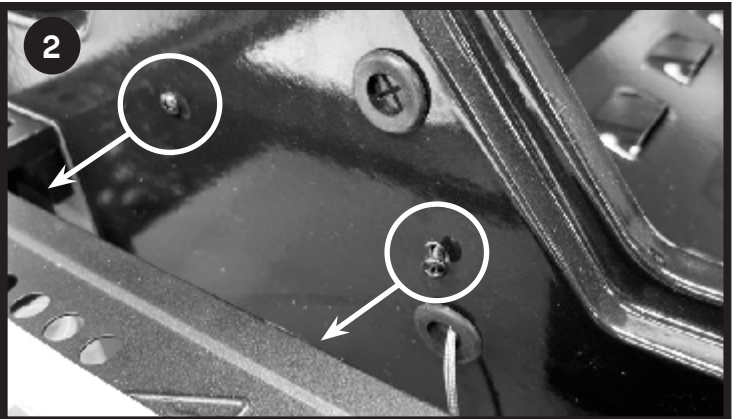

Remove 2 screws from outside the grill.

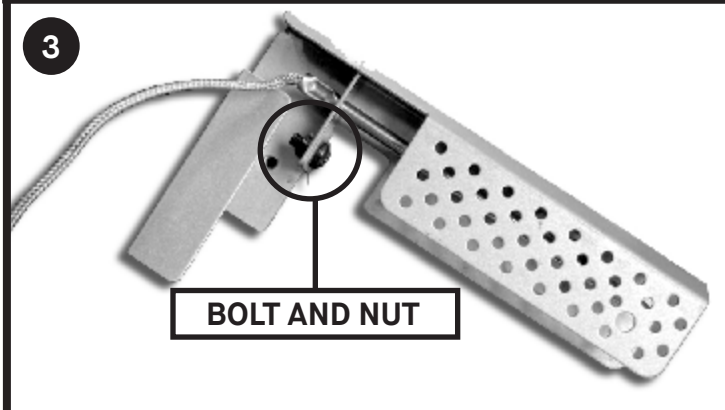

Remove temp probe and bracket from grill.
Remove bolt and nut that secures the old temp probe to the bracket.

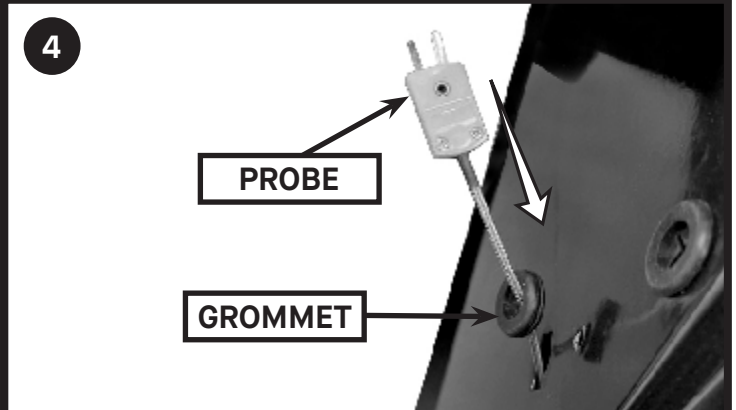

Remove grommet from temp probe.
Feed the yellow end of temp probe into grill body to remove.

Installation:

- Secure new temp probe to bracket.
- Push yellow end of temp probe through grill.
- Resecure grommet.
- Resecure bracket.
- Plug temp probe back into controller.