



xiaomi Smart Projector L1 User Manual · 01

คู่มือการใช้งานโปรเจคเตอร์อัจฉริยะ: Xiaomi L1 · 14

Read this manual carefully before use, and retain it for future reference.

Safety Instructions

Before using the product, make sure to carefully read the following safety instructions.

 This warning symbol informs the user that this product contains non-insulated voltage sources that can cause an electric shock. Coming into contact with any internal component may result in an electric shock.

 This symbol informs the user about important handling and maintenance related information. Please read this information carefully to ensure proper use.

 This symbol informs the user to be aware of high temperatures.

 This symbol informs the user to avoid touching this part.

 Transportation Instructions: It is recommended to transport this projector in its original or similar packaging.

 Preventing Electric Shocks and Fire Hazards:

- Only use the provided genuine power adapter.
- Unplug the projector from the electrical outlet during thunderstorms or when it is not being used for a long time, so as to avoid damage caused by a power surge or lightning strike.
- Do not place any flammable objects near this projector so as to avoid fire.
- Do not block any of the vents as this may cause heat build-up inside the projector, and possibly result in a fire.
- Do not block the lens when the projector is turned on. Any object placed close to the lens may get very hot and/or deformed, and may even cause a fire.



Safety Precautions:




- Do not place this projector on an unstable platform, stand or table so as to prevent it from falling and causing serious damage or personal injury.
- Do not look directly into the lens when the projector is turned on to avoid eye damage.
- Do not attempt to disassemble this projector as it may contain dangerous high voltage components. This projector must only be maintained and repaired by a qualified or authorized technician.
- Do not expose this projector to rain or moisture (operating humidity is 20%–80%).
- Do not immerse this projector in, nor expose it to water or other liquids. Immediately unplug the projector if any liquid or object got into its housing, and have it checked by a qualified technician before using it again.
- Do not place this projector in any of the following environments:
 - In poorly ventilated or narrow spaces.
 - Near devices that produce a strong magnetic field.
 - In direct sunlight.
 - In extremely hot, cold or humid environments.
 - Close to a fire alarm.



Cautions:

- Risk of explosion if the battery is replaced by an incorrect type.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
- A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.



Product Overview

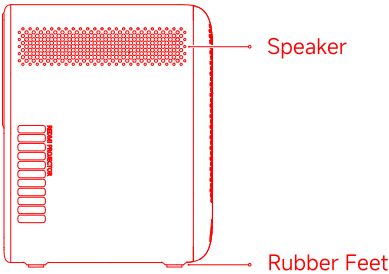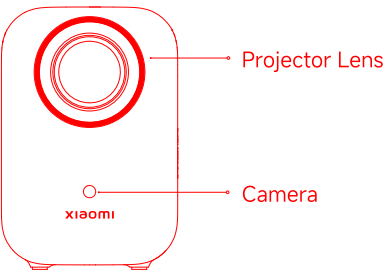

- | | | | | | | | |
|---|----------------|---|------------------------|---|-----------------------|---|---------------|
| 1 | Headphone Port | 2 | HDMI Signal Input Port | 3 | USB 2.0 Protocol Port | 4 | DC IN DC Port |
|---|----------------|---|------------------------|---|-----------------------|---|---------------|

Cautions:

- Do not look directly into the projection lens to avoid eye damage as this projector emits strong light during use.
- Do not place any objects within a range of 20 cm around the air inlet and outlet to avoid affecting the heat dissipation and causing damage or posing hazards.
- If mounting is required, please purchase a compatible mounting bracket with screws meeting the following specifications: a diameter of 1/4 inch and a length of less than 8 mm.
- Retain the original packaging for future storage or transportation.



Remote control



- ① Power Button:
Turn on or turn off the projector
- ② Google Assistant:
Ask Google Assistant to find movies, stream apps, play music, and control the projector – all with your voice.
- ③ Navigation Button:
Move up, down, left, or right
- ④ Confirm Button: Press to confirm
- ⑤ Back Button: Return to the previous screen
- ⑥ Home Button: Return to the home screen
- ⑦ Settings Button: Open the control panel
- ⑧ Netflix Button: Access the Netflix app
- ⑨ YouTube Button: Access the YouTube app
- ⑩ Volume Button:
+ Volume up
- Volume down



Cautions:

- Note: Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements. The appearance or screen printing characters on the projector may vary for different sales regions. Please refer to the actual projector.



Notes:

- It is recommended to use the remote control within a distance of 5 meters from the projector.
- Make sure the positive and negative poles are installed correctly when placing the batteries into the remote control.
- Dispose of used batteries in accordance with local waste disposal regulations and guidelines of the country or region you live in.



Notes:

- The dented part of the remote control is the confirm button, and the surrounding ring-shaped buttons are the navigation buttons for up, down, left, and right.
- There are two buttons above the ring-shaped navigation buttons. The top one is the power button and the second one is the Google Assistant button.
- The first row below the ring-shaped navigation buttons includes, from left to right, the back, home, and settings buttons.
- The second row includes, from left to right, the Netflix and the YouTube buttons.
- The third row includes the bar-shaped volume buttons, with the + button for volume up and the - button for volume down.

How to Use

Remote control pairing

Turning On


When the projector is connected to the power supply, press the power button on the projector or the power button on the remote control to turn on the projector.

Turning Off


Press the power button on the projector or the power button on the remote control to bring out the turning off menu, and select the corresponding option.



Make sure the remote control has batteries installed and the projector is turned on.

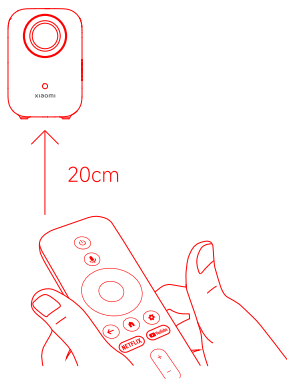

Place the remote control near the projector, within a distance of 20 cm, and simultaneously press and hold the back button (⏮) and the home button (⏪) for 3 seconds to trigger the remote control pairing.

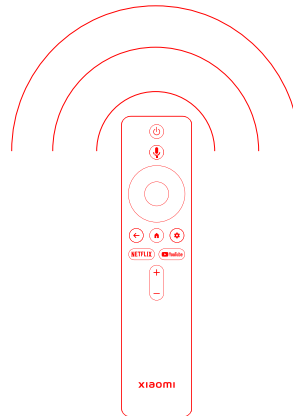


Once completed, the screen will indicate that the remote control is paired successfully.

Adjusting image focus


Auto focus

- The auto focus function is enabled by default. When this function is triggered by moving the projector, the image focus will be automatically adjusted. Alternatively, you can select Settings > Projector > Focus > Execute Focus, and the image focus will also be automatically adjusted.
- You can enable or disable the auto focus function by selecting Settings > Projector > Focus > Auto Focus.

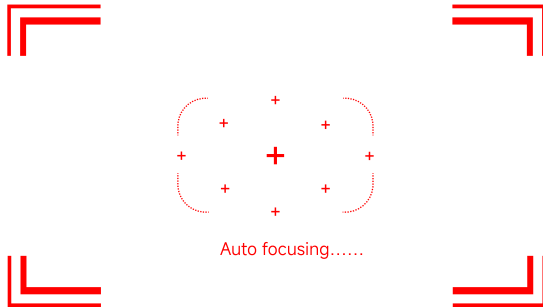

Manual focus

- You can select Settings > Projector > Focus > Manual Focus, and use the left and right buttons on the remote control to manually adjust the focus.

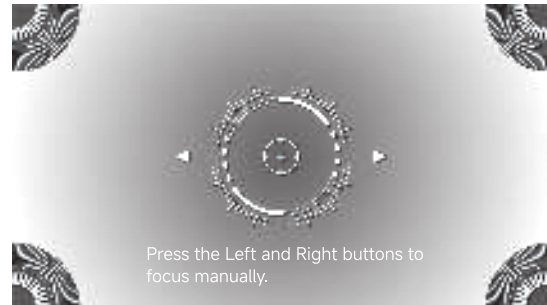

Note: After auto focus is completed, you can also press the confirm button to enter manual focus, and use the navigation button on the remote control to move left and right for further fine-tuning.

Image correction


Auto keystone correction

- The auto keystone correction function is enabled by default. When this function is triggered by moving the projector, the keystone correction will be automatically applied to the image. Alternatively, you can select Settings > Projector > Keystone > Execute auto keystone correction, and the keystone correction will be automatically applied to the image.
- You can enable or disable the auto keystone correction function by selecting Settings > Projector > Keystone.



Manual keystone correction

- You can select Settings > Projector > Keystone > Manual keystone correction, and use the remote control to adjust the image corners for correction.

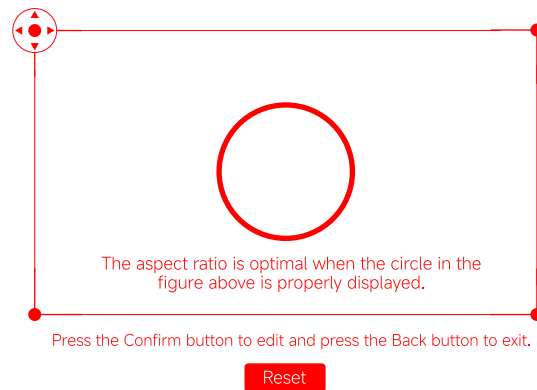

Note: After auto keystone correction is completed, you can also press the confirm button on the remote control to enter manual keystone correction, and use the remote control to fine-tune the image corners for correction.


Auto obstacle avoidance

- This function is enabled by default. During auto image correction, the projector will automatically detect and avoid obstacles in the projected area, ensuring an unobstructed and complete image. The image may zoom out based on the positions and sizes of the obstacles.
- You can enable or disable this function by pressing the settings button on the remote control and selecting Settings > Projector > Keystone > EasyView.

Auto screen alignment

- This function is enabled by default. During auto image correction, the projector will automatically detect the screen (sold separately) and align the image with all four edges of the screen.
- You can enable or disable this function by pressing the settings button on the remote control and selecting Settings > Projector > Keystone > EasyFit.

Projection distance & screen dimensions

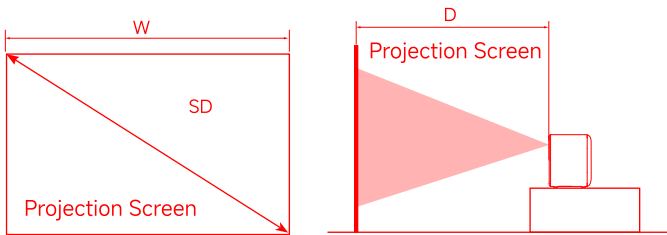

Determine the distance between the projector and the screen according to the desired screen size.

Screen Dimensions (SD)	Projection Distance (D)	Screen Width (W)
40"	106 cm	88 cm
60"	159 cm	132 cm
80"	212 cm	177 cm
100"	265 cm	221 cm
120"	318 cm	265 cm

Screen Dimensions (SD): The diagonal size of the projection screen (in inches).

Projection Distance (D): The distance between the front end of the projector and the screen (in centimeters).

Screen Width (W): The width of the image projected on the wall (in centimeters).

Note: The values in the table above are for reference only. They may slightly differ from the actual values. Please refer to the actual values.

Specifications

Basic Information	Name	Xiaomi Smart Projector L1
	Model	XMTYY03FMG
	Item Dimensions	118 × 142 × 176 mm
	Net Weight	1.2 kg
Optical Parameters	Display Technology	LCD
	Standard Resolution	1920 × 1080P
Projection Parameters	Throw Ratio (TR)	1.2 : 1
	Screen Dimensions	40"–120" (Recommended: 60"–100")
	Lens Focus	Auto focus
	Keystone Correction	Auto keystone correction
System	Built-in Storage	2 GB DDR3/16 GB eMMC
	Operating System	Android TV™ OS
	Bluetooth	Bluetooth 5.0
	Wireless Connectivity	Wi-Fi IEEE 802.11 a/b/g/n/ac 2.4 GHz/5 GHz
Speaker	Audio Effects	Dolby Audio
	Speaker	3 W full-range × 2
Electrical Specifications	Power Consumption	Rated power ≤ 72.0 W, standby power < 0.50 W Support auto power off
Others	Power Input	External power supply 19.0 V $\pm$ 3.79 A
	Noise Level	≤ 30 dB(A) (Theater mode at an ambient temperature of 25°C)
	Storage Temperature/Humidity	-20°C to 55°C/≤ 90%RH
	Operating Temperature/Humidity	0°C to 40°C/20%RH–80%RH

Troubleshooting

Issues	Solutions
No projected image	Turn off the projector and unplug the power cord. Then, plug the power cord back in and turn on the projector.
Screen display error	
Operating system crashes	Unplug the power cord. Then, plug it back in and turn on the projector.
Couldn't operate with the new remote control	Pair the remote control before use.
Remote control malfunction	Turn off the projector and unplug the power cord. After 5 minutes, plug the power cord back in and turn on the projector. Then, pair the remote control again.
The projector automatically turns off due to overheating	Clear obstacles around the projector, wait for it to cool off, and turn it on again.
Other internal system errors	Contact the after-sales service team.

Regulatory Compliance



Hereby, [Xiaomi Communications Co., Ltd.] declares that the radio equipment type [Xiaomi Smart Projector L1/ XMTYY03FMG] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://www.mi.com/global/service/support/declaration.html>

Operation Frequency: 2.4 GHz–2.4835 GHz (for Bluetooth)

Maximum RF Power Output: < 10 mW (for Bluetooth)

Operation Frequency: 2.4 GHz–2.4825 GHz (for Wi-Fi 2.4 GHz)

Maximum RF Power Output: < 100 mW (for Wi-Fi 2.4 GHz)

Operation Frequency: 5.15 GHz–5.35 GHz and 5.47 GHz–5.725 GHz (for Wi-Fi 5 GHz)

Maximum RF Power Output: < 200 mW (for Wi-Fi 5.15 GHz–5.25 GHz),

< 100 mW (for Wi-Fi 5.25 GHz–5.35 GHz & 5.47 GHz–5.725 GHz)

Note:

Under normal use of condition, this equipment should be kept a separation distance of at least 20 cm between the antenna and the body of the user.

This device is restricted to indoor use when operating in the 5150 to 5350 MHz.

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK(NI)

Product Certifications

Hereby, [Xiaomi Communications Co., Ltd.] declares that the radio equipment type [Bluetooth® Voice Remote/RC604-MG1] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://www.mi.com/global/service/support/declaration.html>

Operation Frequency: 2.4 GHz–2.4835 GHz

Maximum RF Power Output: < 10 mW

Note:

The Bluetooth® Voice Remote has been evaluated to meet general RF exposure requirement. It can be used in portable exposure condition without restriction.



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive 2012/19/EU) which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

The projector is designed for single-user use.

The projector features Bluetooth and Wi-Fi capabilities, with both enabled by default upon startup.

TCP ports 6466 and 6467 are open by default for Google's remote control services.

The projector has a built-in camera that enables auto focus and keystone correction.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



Dolby, Dolby Audio, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation. Manufactured under license from Dolby Laboratories.

Google TV is the name of this device's software experience and a trademark of Google LLC. Google, YouTube and Android TV are trademarks of Google LLC.
Google Assistant is not available in all languages and countries. Availability of services varies by country and language.

The product label and certification information are located at the bottom of the product.

Manufacturer: Xiaomi Communications Co., Ltd.
Address: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, 100085, China
For further information, please go to www.mi.com
User Manual Version: V1.0



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by [Xiaomi Inc.] is under license. Other trademarks and trade names are those of their respective owners.

กรุณาอ่านคู่มือฉบับนี้ให้ละเอียดก่อนใช้งาน และควรเก็บไว้ใช้อ้างอิงในอนาคต

คำแนะนำเพื่อความปลอดภัย

ก่อนใช้ผลิตภัณฑ์นี้ โปรดตรวจสอบว่าได้อ่านคำแนะนำเพื่อความปลอดภัยต่อไปนี้อย่างละเอียดแล้ว



สัญลักษณ์คำเตือนนี้แจ้งให้ผู้ใช้ทราบว่าผลิตภัณฑ์นี้มีแหล่งจ่ายแรงดันแบบไม่หมุนวนที่สามารถทำให้เกิดไฟฟ้าดูดได้ การสัมผัสกับส่วนประกอบภายในใด ๆ อาจทำให้เกิดไฟฟ้าดูดได้



สัญลักษณ์นี้แจ้งให้ผู้ใช้รับทราบเกี่ยวกับการจัดการที่สำคัญและข้อมูลเกี่ยวกับการดูแลรักษา กรุณาอ่านข้อมูลนี้ให้ละเอียดเพื่อนำไปใช้ได้อย่างถูกต้องตามการใช้งานที่เหมาะสม



สัญลักษณ์นี้แจ้งเตือนผู้ใช้ให้ระวังถึงอุณหภูมิที่สูง



สัญลักษณ์นี้แจ้งเตือนให้ผู้ใช้หลีกเลี่ยงการสัมผัสส่วนนี้



คำแนะนำด้านการขนส่ง: แนะนำให้ขนส่งโปรเจกเตอร์เครื่องนี้ในบรรจุภัณฑ์เดิมหรือที่คล้ายกัน



การป้องกันไฟฟ้าดูดและอันตรายจากไฟไหม้:

- ใช้อะแดปเตอร์แปลงไฟของแท้ที่ให้มาด้วยเท่านั้น
- ถอดปลั๊กโปรเจกเตอร์จากเต้ารับไฟฟ้าระหว่างพบฟ้าคะนองหรือเมื่อไม่ได้ใช้งานเป็นเวลานาน เพื่อหลีกเลี่ยงความเสียหายที่เกิดจากไฟกระชากหรือฟ้าผ่า
- อย่าวางวัตถุไวไฟใด ๆ ใกล้กับโปรเจกเตอร์เครื่องนี้ เพื่อหลีกเลี่ยงไฟไหม้
- อย่าปิดกั้นช่องระบายอากาศใด ๆ เนื่องจากอาจทำให้เกิดการสะสมความร้อนภายในโปรเจกเตอร์ และอาจส่งผลให้เกิดไฟไหม้
- อย่าปิดกั้นเลนส์เมื่อโปรเจกเตอร์เปิดอยู่ วัสดุใด ๆ วางไว้ใกล้เลนส์อาจร้อนมากหรือพิดรูป และอาจเด้งกระแทกทำให้เกิดไฟไหม้







ข้อควรระวังเพื่อความปลอดภัย:

- อย่าวางโปรเจกเตอร์เครื่องนี้บนแพลตฟอร์ม สเตนด์ หรือโต๊ะที่ไม่มั่นคง เพื่อป้องกันไม่ให้โปรเจกเตอร์ร่วงหล่นและทำให้เกิดความเสียหายรุนแรงหรือการบาดเจ็บส่วนบุคคล
- อย่ามองไปที่เลนส์โดยตรงเมื่อโปรเจกเตอร์เปิดอยู่ เพื่อหลีกเลี่ยงความเสียหายต่อดวงตา
- อย่าพยายามถอดชิ้นส่วนโปรเจกเตอร์เครื่องนี้ เนื่องจากอาจมีส่วนประกอบไฟฟ้าแรงสูงที่เป็นอันตราย โปรเจกเตอร์เครื่องนี้ต้องดูแลรักษาและซ่อมโดยช่างเทคนิคที่มีคุณสมบัติเหมาะสมหรือได้รับการรับรองเท่านั้น
- อย่าให้โปรเจกเตอร์เครื่องนี้สัมผัสน้ำฝนหรือความชื้น (ความชื้นที่เหมาะสมกับการทำงานคือ 20%–80%)
- อย่างจุ่มโปรเจกเตอร์เครื่องนี้ในน้ำหรือของเหลวอื่น ๆ และอย่าให้สัมผัสน้ำหรือของเหลวอื่น ๆ ถอดปลั๊กโปรเจกเตอร์ออกทันทีหากมีของเหลวหรือวัตถุใด ๆ เข้าไปในตัวเครื่อง และให้ช่างเทคนิคที่มีคุณสมบัติเหมาะสมตรวจสอบก่อนใช้งานอีกครั้ง
- อย่าวางโปรเจกเตอร์เครื่องนี้ไว้ในสภาพแวดล้อมใด ๆ ต่อไปนี้:
 - ในที่ที่มีอากาศถ่ายเทไม่ดีหรือแคบ
 - อยู่ใกล้กับอุปกรณ์ที่สร้างสนามแม่เหล็กความเข้มขุ่นสูง
 - ถูกแสงแดดโดยตรง
 - ในสภาพแวดล้อมที่ร้อน เย็น หรือชื้นจัด
 - อยู่ใกล้สัญญาณแจ้งเหตุเพลิงไหม้




ข้อควรระวัง:

- อาจเกิดความเสี่ยงในการระเบิดได้หากเปลี่ยนแบตเตอรี่โดยใช้แบตเตอรี่ไม่ถูกประเภท
- การกำจัดแบตเตอรี่โดยการเผาหรือการใส่แบตเตอรี่ลงในเตาหลอม ๆ หรือการบดทับหรือการดัดแบตเตอรี่ซึ่งกลอาจก่อให้เกิดการระเบิดได้
- การปล่อยแบตเตอรี่ไว้ในสภาพแวดล้อมโดยรอบที่อุณหภูมิสูงมากอาจก่อให้เกิดการระเบิดหรือการรั่วไหลของของเหลวหรือก๊าซไวไฟได้
- แบตเตอรี่ที่อยู่ที่ซึ่งแรงดันอากาศต่ำมากอาจก่อให้เกิดการระเบิดหรือการรั่วไหลของของเหลวหรือก๊าซไวไฟได้



(กดเพื่อปิดโปรเจกเตอร์)



((1/4 นิ้ว ความลึก < 8 มม.))

- | | | | |
|------------|----------------------|-----------------------|----------|
| 1 | 2 | 3 | 4 |
| | HDMI | USB | DC IN |
| พอร์ตหูฟัง | พอร์ตเข้าสัญญาณ HDMI | พอร์ตโปรโตคอล USB 2.0 | พอร์ต DC |

ข้อควรระวัง:

- อย่ามองไปที่เส้นสีฉายภาพโดยตรง เพื่อหลีกเลี่ยงความเสียหายต่อดวงตา เนื่องจากโปรเจกเตอร์เครื่องนี้เป็นสายแสงที่ไม่รบกวนการใช้งาน
- อย่างกว้างขวาง 20 ซม.รอบ ๆ ทางลมเข้าและทางลมออก เพื่อหลีกเลี่ยงการส่งผลกระทบต่อการทำงานของเครื่องและความร้อนและการทำให้เกิดความเสียหายหรือการก่อให้เกิดอันตราย
- หากจำเป็นต้องติดตั้ง โปรดซื้อฐานยึดที่เข้าร่วมกันได้โดยมีสกรูที่ได้นำมาตรฐานตามข้อมูลจำเพาะต่อไปนี้: เส้นผ่านศูนย์กลาง 1/4 นิ้ว และความยาวไม่น้อยกว่า 8 มม.
- โปรดเก็บบรรจุภัณฑ์นี้ไว้สำหรับการจัดเก็บหรือการขนส่งในอนาคต

รีโมทคอนโทรล



-  ปุ่มเปิดปิดเครื่อง:
เปิดหรือปิดโปรเจกเตอร์
-  Google Assistant:
ขอให้ Google Assistant ค้นหาภาพยนตร์ สตีมแอป เล่นเพลง
และควบคุมโปรเจกเตอร์ - ทั้งหมดด้วยเสียงของคุณ
-  ปุ่มนำทาง:
เลื่อนขึ้นด้านบน ลงล่าง ไปด้านซ้าย หรือไปด้านขวา
-  ปุ่มยืมยีน: กดเพื่อยืมยีน
-  ปุ่มย้อนกลับ: กลับไปยังหน้าจอก่อนหน้านี้
-  ปุ่มหน้าหลัก: กลับไปยังหน้าจอหลัก
-  ปุ่มการตั้งค่า: เปิดแผงควบคุม
-  **NETFLIX** ปุ่ม Netflix: เข้าถึงแอป Netflix
-  **YouTube** ปุ่ม YouTube: เข้าถึงแอป YouTube
-  ปุ่มปรับระดับเสียง:
 + เพิ่มระดับเสียง
 - ลดระดับเสียง



ข้อควรระวัง:

- หมายเหตุ: ภาพของผลิตภัณฑ์ อุปกรณ์เสริมและยูสเซอร์อินเตอร์เฟซในการใช้งานใช้สำหรับการอ้างอิงเท่านั้น ผลิตภัณฑ์และฟังก์ชันการทำงานจริงอาจแตกต่างกันไปเนื่องจากการปรับปรุงผลิตภัณฑ์
- รูปลักษณะหรือลักษณะพื้นผิวหน้าจอบนโปรเจกเตอร์อาจแตกต่างกันไปสำหรับภูมิภาคการขายที่ต่างกัน โปรดดูโปรเจกเตอร์ตามจริง



หมายเหตุ:

- แนะนำให้ใช้รีโมทคอนโทรลภายในระยะห่าง 5 เมตรจากโปรเจกเตอร์
- ตรวจสอบให้แน่ใจว่า ชีวมาตรและเซ็นเซอร์ได้รับการติดตั้งถูกต้องเมื่อใส่แบตเตอรี่ลงในรีโมทคอนโทรล
- การจัดแบตเตอรี่ที่ใช้แล้วตามระเบียบข้อบังคับในการกำจัดขยะในท้องถิ่นและคำแนะนำของปรกษหรือภูมิภาคที่คุณอาศัยอยู่



หมายเหตุ:

- ส่วนที่ปุ่มลงของรีโมทคอนโทรลคือปุ่มยืมยีน และปุ่มรูปร่างเหมือนปุ่มอยู่รอบๆ คือปุ่มนำทาง สำหรับขึ้น ลง ซ้าย และขวา
- มีปุ่มสองปุ่มอยู่เหนือปุ่มนำทางรูปร่างเหมือน ปุ่มบนสุดคือปุ่มเปิดปิดเครื่อง และปุ่มที่สองคือ ปุ่ม Google Assistant
- แถวแรกที่อยู่ใต้ปุ่มนำทางรูปร่างเหมือน จากซ้ายไปขวาประกอบด้วยปุ่มย้อนกลับ ปุ่มหน้าหลัก และปุ่มการตั้งค่า
- แถวที่สองจากซ้ายไปขวาประกอบด้วยปุ่ม Netflix และ YouTube
- แถวที่สามประกอบด้วยปุ่มปรับระดับเสียงรูปแท่ง โดยปุ่ม + สำหรับเพิ่มระดับเสียงและปุ่ม - สำหรับลดระดับเสียง

วิธีการใช้งาน

การจับคู่รีโมทคอนโทรล

การเปิดเครื่อง

เมื่อโปรเจกเตอร์เชื่อมต่อกับอะแดปเตอร์แปลงไฟ โปรดกดปุ่มเปิดปิดเครื่องบนโปรเจกเตอร์หรือปุ่มเปิดปิดเครื่องบนรีโมทคอนโทรลเพื่อเปิดโปรเจกเตอร์

การปิดเครื่อง


กดปุ่มเปิดปิดเครื่องบนโปรเจกเตอร์หรือปุ่มเปิดปิดเครื่องบนรีโมทคอนโทรลเพื่อเรียกเมนูการปิดเครื่องออกมา แลเสือกตัวเลือกที่สอดคล้องกัน




โปรดตรวจสอบว่ารีโมทคอนโทรลติดตั้งแบตเตอรี่และโปรเจกเตอร์เปิดอยู่



20 ซม.



วางรีโมทคอนโทรลไว้ใกล้ ๆ กับโปรเจกเตอร์ภายในระยะห่าง 20 ซม. แลกดปุ่มย้อนกลับ (←) และปุ่มนำหลัก (→) ค้างไว้พร้อมกันเป็นเวลา 3 วินาที เพื่อเปิดใช้งานการจับคู่รีโมทคอนโทรล

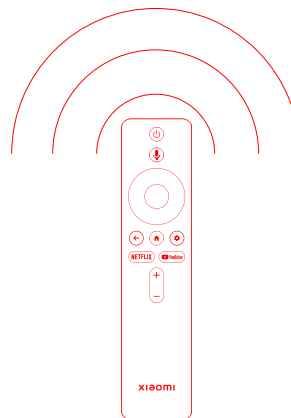


เมื่อดำเนินการเสร็จสมบูรณ์แล้ว หน้าจอจะระบุว่าคู่รีโมทคอนโทรลสำเร็จแล้ว

การปรับโฟกัสภาพ

การปรับโฟกัสอัตโนมัติ

- ฟังก์ชันการปรับโฟกัสอัตโนมัติจะเปิดใช้งานตามค่าเริ่มต้น เมื่อฟังก์ชันนี้ทำงานด้วยการเคลื่อนย้ายโปรเจกเตอร์ ระบบจะปรับโฟกัสภาพโดยอัตโนมัติ อีกทางเลือกหนึ่ง คุณสามารถเลือก การตั้งค่า > โปรเจกเตอร์ > โฟกัส > ดำเนินการโฟกัส แล้วระบบจะปรับโฟกัสภาพอัตโนมัติด้วย
- คุณสามารถปิดหรือเปิดใช้งานฟังก์ชันการปรับโฟกัสอัตโนมัติได้ด้วยการเลือก การตั้งค่า > โปรเจกเตอร์ > โฟกัส > การปรับโฟกัสอัตโนมัติ

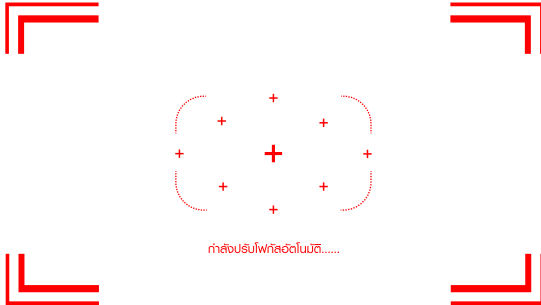

การปรับโฟกัสด้วยตนเอง

- คุณสามารถเลือก การตั้งค่า > โปรเจกเตอร์ > โฟกัส > การปรับโฟกัสด้วยตนเอง และใช้ปุ่มซ้ายและขวาบนรีโมทคอนโทรลเพื่อปรับโฟกัสด้วยตนเอง




หมายเหตุ: หลังจากการปรับโฟกัสอัตโนมัติเสร็จสมบูรณ์แล้ว คุณยังสามารถกดปุ่มยืนยันเพื่อเข้าสู่การปรับโฟกัสด้วยตนเอง และใช้ปุ่มนำทางบนรีโมทคอนโทรลเพื่อเลื่อนไปทางซ้ายและขวาสำหรับการปรับแต่งเพิ่มเติม

การแก้ไขภาพ

การแก้ไขคีย์สโตนอัตโนมัติ

- ฟังก์ชันการแก้ไขคีย์สโตนอัตโนมัติจะเปิดใช้งานตามค่าเริ่มต้น เมื่อฟังก์ชันนี้ทำงานด้วยการเคลื่อนย้ายโปรเจคเตอร์ ระบบจะใช้การแก้ไขคีย์สโตนกับภาพโดยอัตโนมัติ อีกทางเลือกหนึ่ง คุณสามารถเลือกการตั้งค่า > โปรเจคเตอร์ > คีย์สโตน > ดำเนินการแก้ไขคีย์สโตนอัตโนมัติ แล้วระบบจะใช้การแก้ไขคีย์สโตนกับภาพโดยอัตโนมัติ
- คุณสามารถปิดใช้งานหรือปิดใช้ฟังก์ชันการแก้ไขคีย์สโตนอัตโนมัติได้ด้วยการเลือก การตั้งค่า > โปรเจคเตอร์ > คีย์สโตน

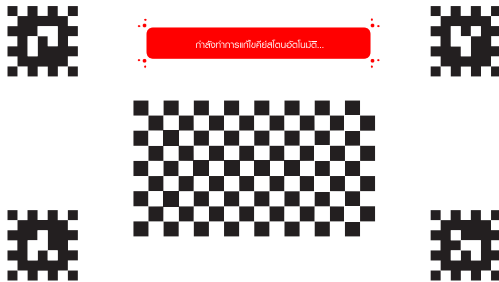

การแก้ไขคีย์สโตนด้วยตนเอง

- คุณสามารถเลือก การตั้งค่า > โปรเจคเตอร์ > คีย์สโตน > การแก้ไขคีย์สโตนด้วยตนเอง และใช้รีโมทคอนโทรลเพื่อปรับมุมมองสำหรับการแก้ไข



หมายเหตุ: หลังจากการแก้ไขคีย์สโตนอัตโนมัติเสร็จสมบูรณ์แล้ว คุณยังสามารถกดปุ่มยืนยันบนรีโมทคอนโทรลเพื่อเข้าสู่การแก้ไขคีย์สโตนด้วยตนเอง และใช้รีโมทคอนโทรลเพื่อปรับแต่งมุมมองสำหรับการแก้ไข


การหลีกเลี่ยงสิ่งกีดขวางอัตโนมัติ

- พลังที่ขับเคลื่อนอัตโนมัติใช้งานตามค่าเริ่มต้น ระหว่างการแก้ไขภาพอัตโนมัติ โปรแกรมเตอร์จะตรวจจับและหลีกเลี่ยงสิ่งกีดขวางในพื้นที่ฉายภาพโดยอัตโนมัติ ช่วยให้คุณมั่นใจว่าคุณจะได้อุปกรณ์ที่ไร้สิ่งกีดขวางและสมบูรณ์ ภาพอาจซูมออกตามตำแหน่งและขนาดของสิ่งกีดขวาง
- คุณอาจปิดใช้งานหรือปิดใช้ฟังก์ชันนี้ได้โดยกดปุ่มการตั้งค่าบนรีโมทคอนโทรลเสาสื่อ การตั้งค่า > โปรแกรมเตอร์ > คีย์สโตน > EasyView

การจัดแนวหน้าจออัตโนมัติ

- พลังที่ขับเคลื่อนอัตโนมัติใช้งานตามค่าเริ่มต้น ระหว่างการแก้ไขภาพอัตโนมัติ โปรแกรมเตอร์จะตรวจจับหน้าจอ (จำหน่ายแยกต่างหาก) และจัดแนวภาพให้ตรงกับขอบทั้งสี่ของหน้าจอโดยอัตโนมัติ
- คุณอาจปิดใช้งานหรือปิดใช้ฟังก์ชันนี้ได้โดยกดปุ่มการตั้งค่าบนรีโมทคอนโทรลเสาสื่อ การตั้งค่า > โปรแกรมเตอร์ > คีย์สโตน > EasyFit

ระยะห่างของการฉายภาพและขนาดหน้าจอ

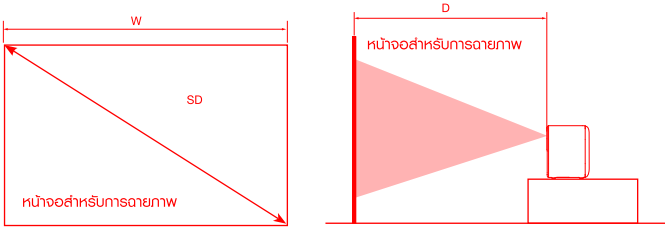

กำหนดระยะห่างระหว่างโปรแกรมเตอร์กับหน้าจอตามขนาดหน้าจอที่ต้องการ

ขนาดหน้าจอ (SD)	ระยะห่างของการฉายภาพ (D)	ความกว้างหน้าจอ (W)
40"	106 ซม.	88 ซม.
60"	159 ซม.	132 ซม.
80"	212 ซม.	177 ซม.
100"	265 ซม.	221 ซม.
120"	318 ซม.	265 ซม.

ขนาดหน้าจอ (SD): ขนาดตามแนวทแยงมุมของหน้าจอสำหรับการฉายภาพ (หน่วยเป็นนิ้ว)

ระยะห่างของการฉายภาพ (D): ระยะห่างระหว่างด้านหน้าของโปรแกรมเตอร์กับหน้าจอ (หน่วยเป็นเซนติเมตร)

ความกว้างหน้าจอ (W): ความกว้างของภาพที่ฉายไปบนผนัง (หน่วยเป็นเซนติเมตร)

หมายเหตุ: ค่าในตารางด้านบนนี้ใช้สำหรับการอ้างอิงเท่านั้น ซึ่งอาจแตกต่างจากค่าตามจริงเล็กน้อย โปรดดูค่าตามจริง

ข้อมูลจำเพาะ

ข้อมูลพื้นฐาน	ชื่อ	โปรเจกเตอร์อัจฉริยะ: Xiaomi L1
	รุ่น	XMTYY03FMG
	ขนาดวัตถุ	118 x 142 x 176 มม.
	น้ำหนักสุทธิ	1.2 กก.
ค่าพารามิเตอร์ที่เหมาะสมที่สุด	เทคโนโลยีจอแสดงผล	LCD
	ความละเอียดมาตรฐาน	1920 x 1080P
ค่าพารามิเตอร์การถ่ายภาพ	อัตราส่วนการฉาย (TR)	1.2 : 1
	ขนาดหน้าจอ	40"-120" (แนะนำ: 60"-100")
	การโฟกัสเลนส์	การปรับโฟกัสอัตโนมัติ
	การแก้ไข畸变	การแก้ไข畸变อัตโนมัติ
ระบบ	กำลังข้อมูลในตัว	2 GB DDR3/16 GB eMMC
	ระบบปฏิบัติการ	Android TV™ OS
	Bluetooth	Bluetooth 5.0
	การเชื่อมต่อแบบไร้สาย	Wi-Fi IEEE 802.11 a/b/g/n/ac 2.4 GHz/5 GHz
ลำโพง	เอฟเฟกต์เสียง	ระบบเสียง Dolby
	ลำโพง	3 W เน้นช่วง x 2
ข้อมูลจำเพาะทางไฟฟ้า	การใช้พลังงาน	อัตราค่าพลังงาน ≤ 72.0 W ค่าพลังงานสำรอง < 0.50 W รองรับการทำงานที่อุณหภูมิห้อง
อื่น ๆ	กำลังไฟฟ้าขาเข้า	อะแดปเตอร์แปลงไฟภายนอก 19.0 V  3.79 A
	ระดับเสียง	≤ 30 dB(A) (โหมดเสียงที่อุณหภูมิห้อง 25°C)
	อุณหภูมิ/ความชื้นการจัดเก็บ	-20°C ถึง 55°C/≤ 90%RH
	อุณหภูมิ/ความชื้นที่เหมาะสมในการทำงาน	0°C ถึง 40°C/20%RH-80%RH

การแก้ปัญหา

ปัญหา	วิธีแก้ปัญห
ไม่มีการฉายภาพ	ปิดโปรเจคเตอร์และถอดปลั๊กสายไฟออก จากนั้นให้สลับปลั๊กสายไฟกลับเข้าไปและเปิดโปรเจคเตอร์
เกิดข้อผิดพลาดกับหน้าจอแสดงผล	
เกิดการขัดข้องของระบบปฏิบัติการ	ถอดปลั๊กสายไฟออก จากนั้นให้สลับปลั๊กสายไฟกลับเข้าไปและเปิดโปรเจคเตอร์
ไม่สามารถดำเนินการด้วยรีโมทคอนโทรลอันใหม่	จับคู่รีโมทคอนโทรลก่อนใช้
รีโมทคอนโทรลทำงานผิดปกติ	ปิดโปรเจคเตอร์และถอดปลั๊กสายไฟออก หลังจากผ่านไป 5 นาที ให้สลับปลั๊กสายไฟกลับเข้าไปและเปิดโปรเจคเตอร์ จากนั้นให้จับคู่รีโมทคอนโทรลอีกครั้ง
โปรเจคเตอร์จะปิดโดยอัตโนมัติเนื่องจากความร้อนสูงเกินไป	กำจัดสิ่งกีดขวางรอบ ๆ โปรเจคเตอร์ รอสักครู่ให้เครื่องเย็นลง แล้วเปิดเครื่องอีกครั้ง
เกิดข้อผิดพลาดอื่น ๆ ของระบบภายใน	ติดต่อทีมบริการหลังการขาย

การปฏิบัติตามระเบียบข้อบังคับ



[Xiaomi Communications Co., Ltd.] ขอยืนยันว่าอุปกรณ์วิทยุประเภท [โทรศัพท์มือถืออัจฉริยะ: Xiaomi L1/ XMTYY03FMG] เป็นไปตามคำสั่งที่ 2014/53/EU ประกาศฉบับเดิมของค่าประกาศความสอดคล้องของสหภาพยุโรปจะอยู่ในที่อยู่ทาง

อินเทอร์เน็ตต่อไปนี้: <http://www.mi.com/global/service/support/declaration.html>

ย่านความถี่ปฏิบัติการ: 2.4 GHz–2.4835 GHz (สำหรับ Bluetooth)

กำลังส่ง RF สูงสุด: < 10 mW (สำหรับ Bluetooth)

ย่านความถี่ปฏิบัติการ: 2.4 GHz–2.4835 GHz (สำหรับ Wi-Fi 2.4 GHz)

กำลังส่ง RF สูงสุด: < 100 mW (สำหรับ Wi-Fi 2.4 GHz)

ย่านความถี่ปฏิบัติการ: 5.15 GHz–5.35 GHz และ 5.47 GHz–5.725 GHz (สำหรับ Wi-Fi 5 GHz)

กำลังส่ง RF สูงสุด: < 200 mW (สำหรับ Wi-Fi 5.15 GHz–5.25 GHz)

< 100 mW (สำหรับ Wi-Fi 5.25 GHz–5.35 GHz และ 5.47 GHz–5.725 GHz)

หมายเหตุ:

อุปกรณ์ชนิดนี้จำเป็นต้องมีระยะห่างจากตัวของผู้ใช้งานอย่างน้อย 20 ซม. ภายใต้สภาพการใช้งานปกติ

อุปกรณ์นี้จำกัดการใช้งานภายในอาคารเท่านั้นเมื่อทำงานในช่องความถี่ 5150 ถึง 5350 MHz

	AT	BE	BG	HR	CY	CZ	DK
	EE	FI	FR	DE	EL	HU	IE
	IT	LV	LT	LU	MT	NL	PL
	PT	RO	SK	SI	ES	SE	UK(NI)

การรับรองผลิตภัณฑ์

[Xiaomi Communications Co., Ltd.] ยืนยันว่าอุปกรณ์วิทยุประเภท [Bluetooth® Voice Remote/RC604-MG1] เป็นไปตามคำสั่งที่ 2014/53/EU ประกาศฉบับเดิมของค่าประกาศความสอดคล้องของสหภาพยุโรปปัจจุบันที่อยู่ทางอินเทอร์เน็ตต่อไปนี้: <http://www.mi.com/global/service/support/declaration.html>

ย่านความถี่ปฏิบัติการ: 2.4 GHz-2.4835 GHz

กำลังส่ง RF สูงสุด: < 10 mW

หมายเหตุ:

ระบบ Bluetooth® Voice ได้รับการประเมินว่าไม่มาตรฐานตามข้อกำหนดการเปิดรับความถี่วิทยุทั่วไป ซึ่งสามารถใช้ได้ในสภาวะการเปิดรับแบบเคลื่อนย้ายได้โดยไม่มีข้อจำกัด



ผลิตภัณฑ์ทั้งหมดที่มีสัญลักษณ์นี้เป็นขยะอุปกรณ์ไฟฟ้าและอิเล็กทรอนิกส์ (WEEE ตามคำสั่งที่ 2012/19/EU) ซึ่งไม่ควรปะปนกับขยะในครัวเรือนที่ไม่ได้จำแนก คุณควรปกป้องสุขภาพของมนุษย์และสิ่งแวดล้อมด้วยการส่งขยะอุปกรณ์ของคุณไปยังจุดรวบรวมที่กำหนดไว้เพื่อการรีไซเคิลขยะอุปกรณ์ไฟฟ้าและขยะอิเล็กทรอนิกส์ ซึ่งได้รับการแต่งตั้งจากรัฐบาลหรือหน่วยงานท้องถิ่น การกำจัดและการรีไซเคิลที่ถูกต้องจะช่วยป้องกันผลกระทบที่ตามมาซึ่งอาจเกิดขึ้นได้ต่อสิ่งแวดล้อมและสุขภาพของมนุษย์โปรดติดต่อผู้ติดตั้งหรือหน่วยงานท้องถิ่นสำหรับข้อมูลเพิ่มเติมเกี่ยวกับตำแหน่งที่ตั้ง เช่นเดียวกับข้อกำหนดและเงื่อนไขของจุดเก็บนั้น ๆ



โปรดถอดรื้อออกแบบสำหรับการใช้งานโดยผู้ใช้คนเดียว
โปรดถอดรื้อมาพร้อมความสามารถด้าน Bluetooth และ Wi-Fi โดยเปิดใช้งานทั้งคู่ตามค่าเริ่มต้นเมื่อเริ่มต้นเปิดเครื่อง
พอร์ต TCP 6466 และ 6467 เปิดอยู่ตามค่าเริ่มต้นสำหรับการรับบริการรีโมทคอนโทรลของ Google
โปรดถอดรื้อมีกล่องในตัวที่สามารถใช้การปรับไฟที่สวิตช์และการแก๊วแก๊สได้

“เครื่องโทรคมนาคมและอุปกรณ์นี้มีความสอดคล้องตามมาตรฐานหรือข้อกำหนดทางเทคนิคของ กสทช”



คำว่า HDMI, HDMI High-Definition Multimedia Interface, ชุด HDMI Trade และโลโก้ HDMI เป็นเครื่องหมายการค้าหรือเครื่องหมายการค้าจดทะเบียนของ HDMI Licensing Administrator, Inc.



ผลิตภายใต้การอนุญาตจาก Dolby Laboratories Dolby, Dolby Audio และสัญลักษณ์รูปตัว D สองตัวเป็นเครื่องหมายการค้าจดทะเบียนของ Dolby Laboratories Licensing Corporation

Google TV เป็นชื่อซอฟต์แวร์ของบริษัทนี้และเป็นเครื่องหมายการค้าของ Google LLC. Google, YouTube และ Android TV g เป็นเครื่องหมายการค้าของ Google LLC.

Google Assistant ไม่สามารถใช้งานได้ในทุกภาษาและทุกประเทศ ความพร้อมใช้งานของบริการแตกต่างกันไปตามประเทศและภาษา

ป้ายกำกับผลิตภัณฑ์และข้อมูลใบรับรองอยู่ที่ด้านหลังของผลิตภัณฑ์

ผู้ผลิต: Xiaomi Communications Co., Ltd.

ที่อยู่: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, 100085, China

สำหรับข้อมูลเพิ่มเติม โปรดดูที่ www.mi.com

คู่มือการใช้งานเวอร์ชัน: V1.0



เครื่องหมายที่เป็นคำและโลโก้ Bluetooth® เป็นเครื่องหมายการค้าจดทะเบียนของ Bluetooth SIG, Inc. และการใช้เครื่องหมายดังกล่าวโดย [Xiaomi Inc.] อยู่ภายใต้ใบอนุญาต เครื่องหมายการค้าและชื่อทางการค้าอื่น ๆ เป็นของเจ้าของนั้น ๆ

