V-TAC
Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL
LED FLOODLIGHT

TECHNICAL DATA

MODEL	WATTS	LUMENS	BEAM ANGLE	DF	CRI	Maximum Procurement Product Data 3M(pf)	5M(pf)	N.W	Mounting Height	Wire Length	OPERATION TEMPERATURE	INPUT POWER	DIMENSION
VT-4914	10W	750	110°	>0.9	>70	73.8	204.6	135	3-5M	140mm	-20° to +40°C	AC:220-240V, 50/60Hz	90x86x27mm
VT-4924	20W	1650	110°	>0.10	>71	74	205	215					120x105x27mm
VT-4934	30W	2510	110°	>0.11	>72	74.3	205.5	322.6					150x122x27mm
VT-4954	50W	4300	110°	>0.12	>73	74.8	206.5	551		150mm			180x150x30mm
VT-49104	100W	8700	110°	>0.13	>74	76	208	1150					270x222x27mm
VT-49204	200W	17600	110°	>0.14	>75	77.3	210.5	2832					400x333x33mm

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installing and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have bought the product. They are trained and prepared and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST
DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.“KARAVELOW 9B

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation must be performed by a qualified electrician.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Replace any cracked protective shield.
- Minimum distance from lighted objects 1M.
- Terminal block not included.
- Proper grounding should be ensured throughout the installation.

This marking indicates that this product should not be disposed of with other household wastes.

Caution, risk of electric shock.

Non-replaceable control gear

Non-replaceable light source
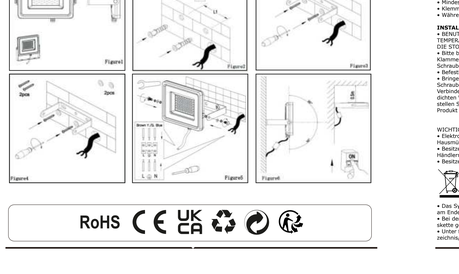
INSTALLATION DIAGRAM