

OLAIKE

Anti-theft Video Doorbell Door Mount

No-drilling Mount/Holder for apartment



Adjustable



No-drilling



Anti-theft



Anti-rust



Chargable



Protection Door




Please read the instruction manual before use

Product Introduction:

Features:

- No drilling required
- Built-in baseplate, not foam cotton, not easy to loosen
- Can be adjusted according to the thickness of the door
- Combined with sheet metal parts, sturdy and anti-theft
- With Iron sheet to prevent damage caused by contact between the screws and the door
- Supports charging without removing the battery (only for charging accessory kits)

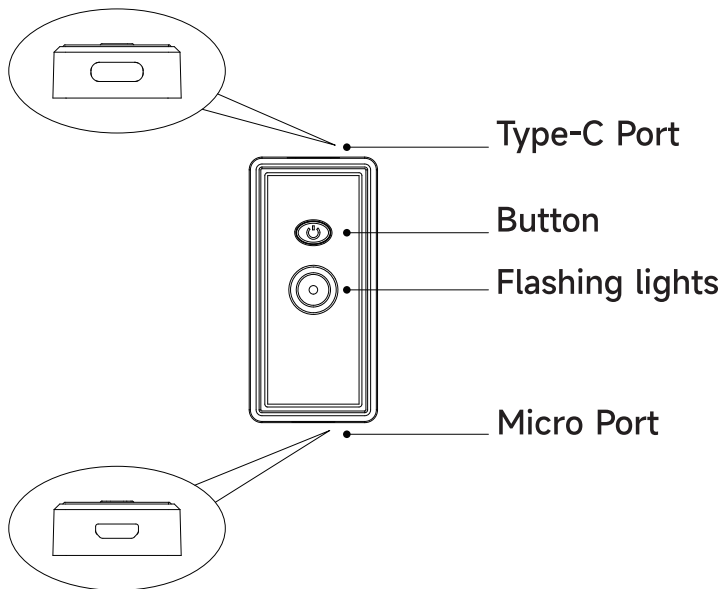

Two types of Metal Mounting Parts:



► #1 Metal Mounting Parts

are suitable for doors with flat surfaces.



► #2 Metal Mounting Parts

are suitable for doors with raised parts.

Note:

- Subject to receipt of the package!
- The following installation procedure uses **#1 Metal Mounting Parts** as an example!

Description of the Charging Box's LED Status:

The key triggers the state of the light	
Charged Status	LED displays
Charging	Blue light flashes for 20 seconds
No connection, no current	Red light flashes for 20 seconds

Tips:

- All illustrations of the product, accessories, descriptions, etc. in the manual are schematic diagrams. For reference only.
- Since there are many sets of products, the specific details of package and schematic diagrams may differ slightly, please refer to the actual product.

Product Introduction:

Package details of the three kits:

- **Non-charging kit contains:** Front Cover*1, Base Plate*1, Metal Mounting Parts*1, Iron Sheet*1, ①Screws*10, ②Screws*6, ③Screws*4, ⑤Handle Screws*2
- **Charging kit contains:** Front Cover*1, Base Plate*1, Metal Mounting Parts*1, Iron Sheet*1, ①Screws*10, ②Screws*6, ③Screws*4, ⑤Handle Screws*2, Charging Box*1, Soft Wiring Cable (Coil)*1, Power Cord(5m)*1, 5V2A USB Power Adapter*1, Cable Clips*20, ④Screw*4, Black Tape*2
- **Charging Accessories kit Contains:** Charging Case*1, Soft Wiring Cable (Coil)*1, Power Cord(5m)*1, 5V2A USB Power Adapter*1, Cable Clips*20, ④Screw*4, Black Tape*2

Front Cover



Base Plate

Metal Mounting Parts


①Screws

Iron Sheet


⑤Handle Screws*2

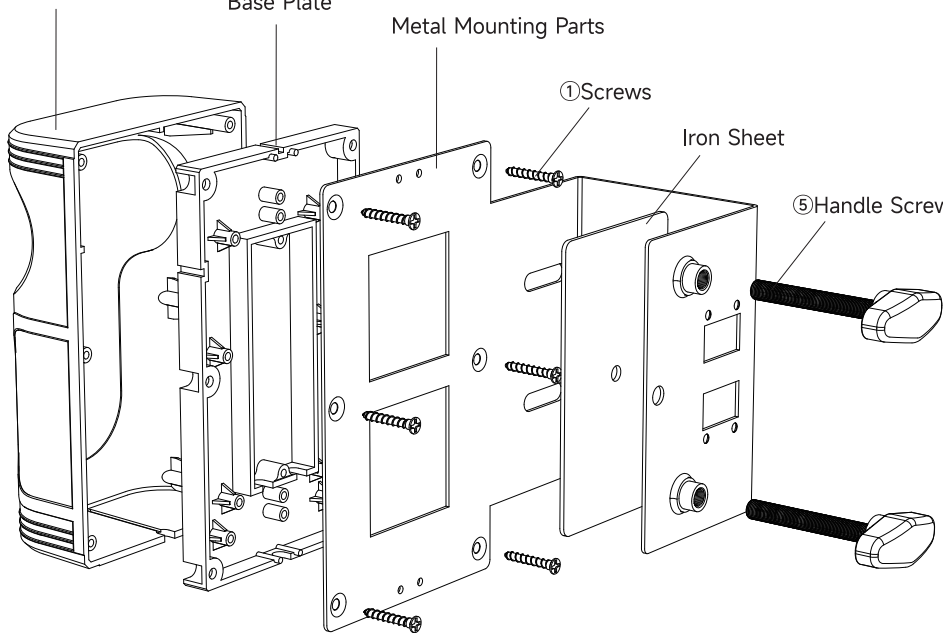

①Screws*10








②Screws*6



③Screws*4

Charging Accessories kit Contains


Note: List only for charging kits, not for Non-charging kits

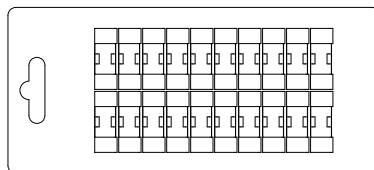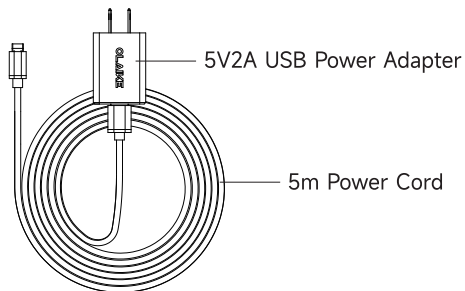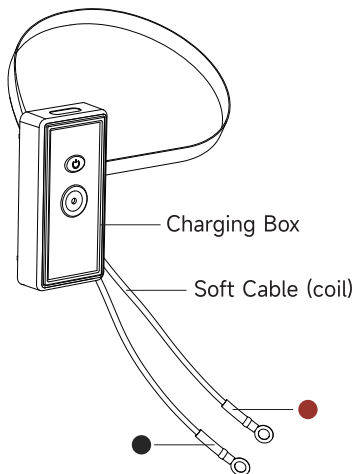


Installation steps:

Note: Including installation steps for non-charging and charging kits.

- ① Secure the doorbell to the base plate with screws
(Note: Add an auxiliary board first when used on the charging kit of Ring Doorbell 2nd Gen)
- The compatible doorbell's models of "Pro/Wired" at the base plate are as follows: (Secured with ①Screw*2)
- Ring Video Doorbell Wired
 - Ring Video Doorbell Pro
 - Ring Video Doorbell Pro 2

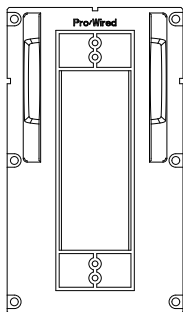


Base Plate



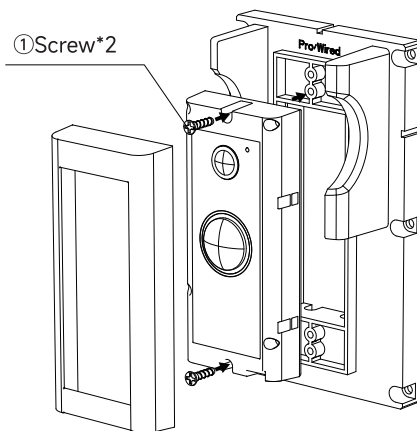


► The compatible doorbell's models of “Ring 1/2/3/4/Blink” at the base plate are as follows: (Secured with ②Screw*4)


- Ring Video Doorbell 2nd Gen 2020 Release
- Ring Video Doorbell 2
- Ring Video Doorbell 3/3Plus
- Ring Video Doorbell 4
- Ring Video Doorbell 1st Gen
- Blink Video Doorbell

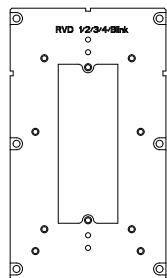


Base Plate

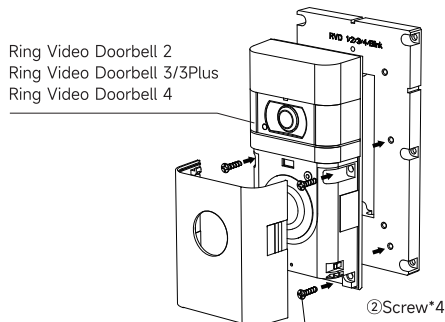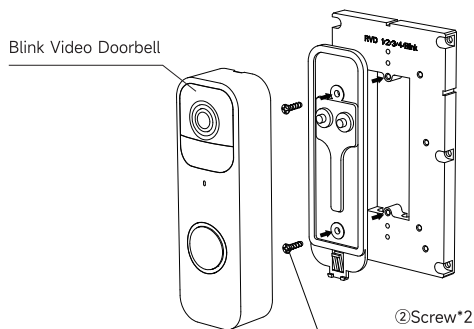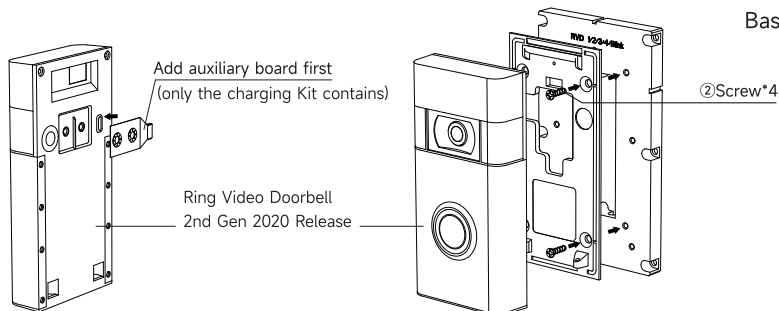

- 2 Put on the Front Cover.


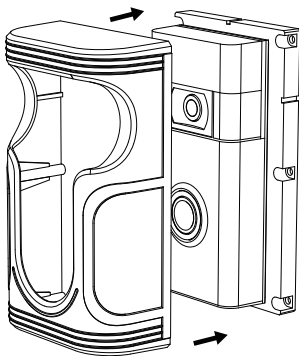


- 3 Screw the Front Cover to the Metal Mounting Parts by using ① screws*6

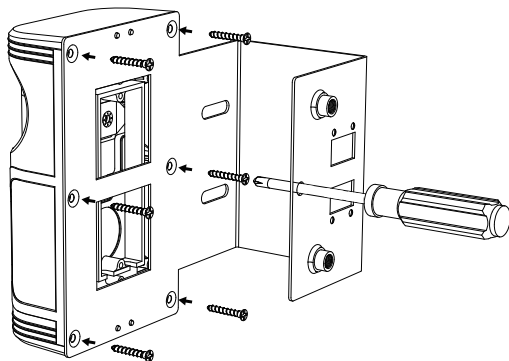


- 4 If it is a non-charging kit please skip to the next step:

Ring Doorbell 2nd Gen 2020 : Screw the coil (Red line to red port marker and black line to black port marker required)

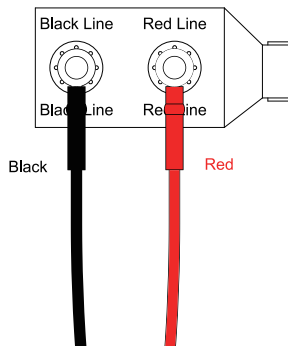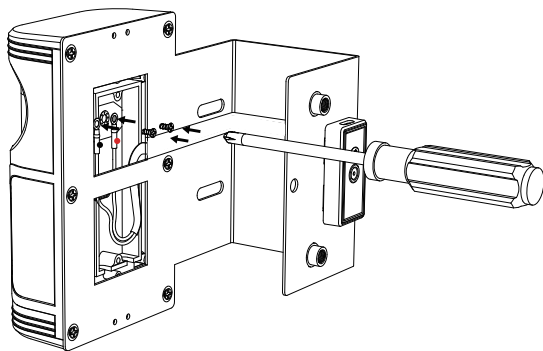


Other doorbell's models: Unscrew the screw on the back of the doorbell, fix the coil directly into the screw hole, and tighten it.

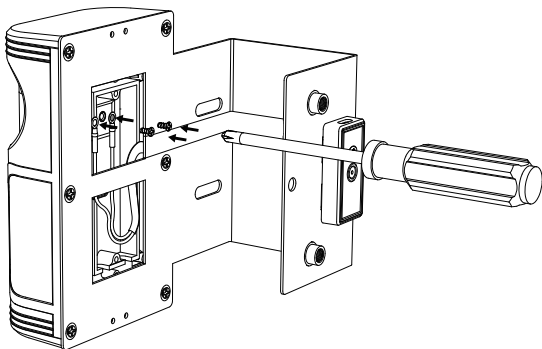


5 Unscrew the handle screws.


Place the bracket on the door and adjust the position to get the best view.

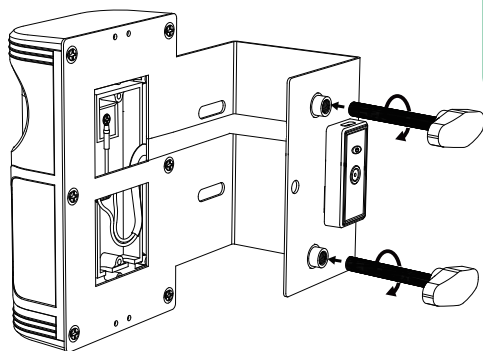


Note:
please do not tighten the
handle screws and refer
to the next step.

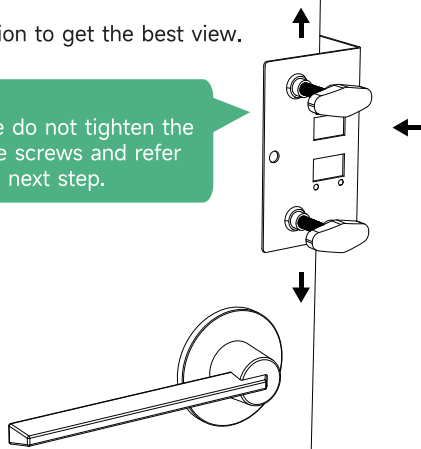

- 6 Tear off the adhesive strip and paste the iron sheet along the side of the door
(Function: Prevent screws from scratching the door.)

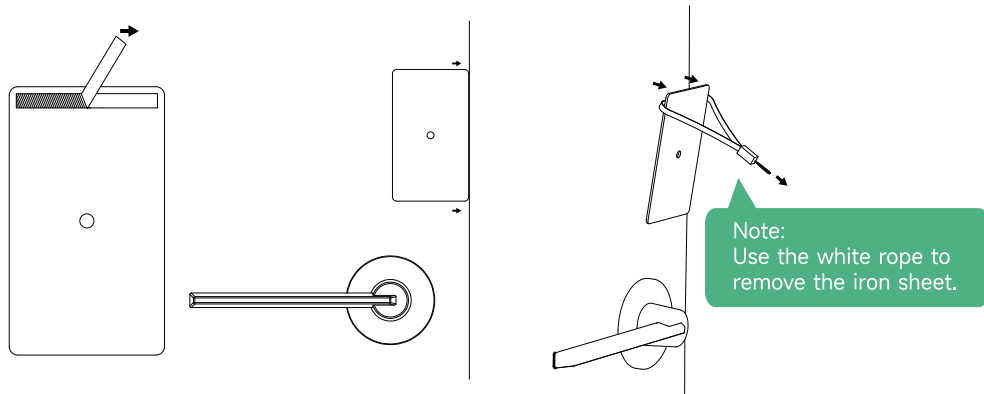

- 7 Remove the film of 3M tape from the Metal Mounting Parts and adjust the Handle Screws to fix the bracket.

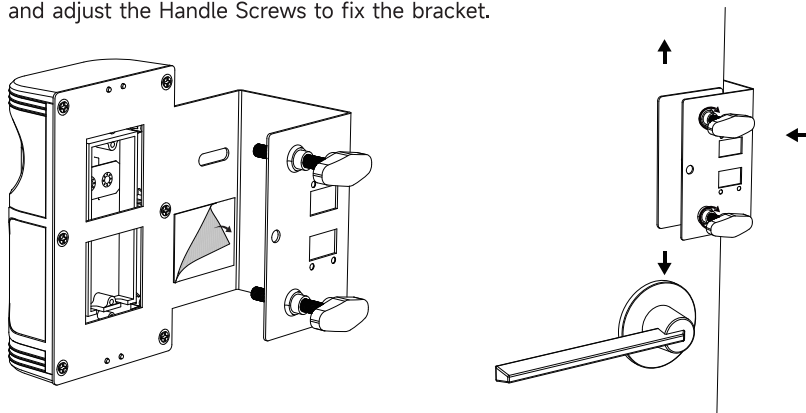


How to install the charging box:

Note:


If you purchased a **Charging Kit**, start with step ⑤

If you purchased a **Charging Accessories kit**, start with step ①


- ① Fix the charging case with ④screws*4.

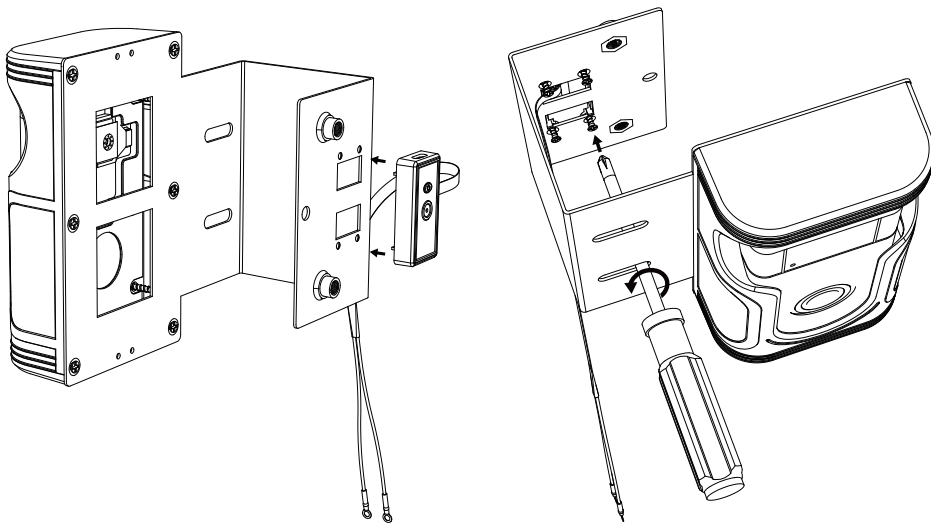


- 2 Tear off the paper from the soft wiring cable (Coil) and paste it onto the bracket.

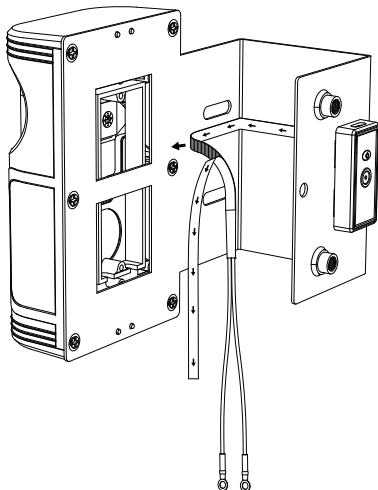


- 3 Use the black tape to cover the soft wiring cable (Coil) and paste.

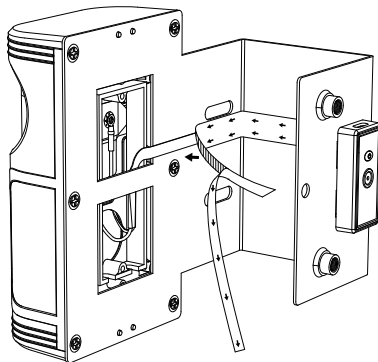

- 4 Note:
Ring Video Doorbell 2nd Gen
need to install the auxiliary board first,
otherwise skip directly to the next step.

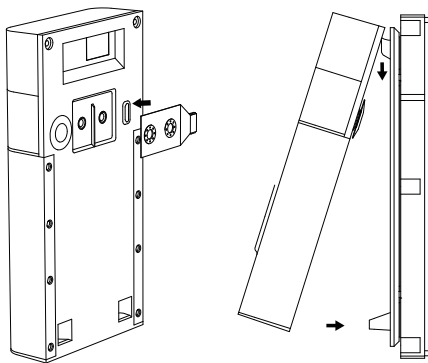


- 5 Fix the coil on the power cord to the charging port and tighten the screws.

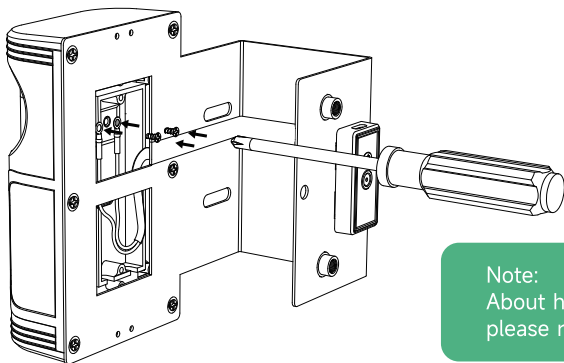


Note:
About how to install the bracket,
please refer to previous steps ⑤-⑦


- 6 Plug the power cord connector into the charging box.

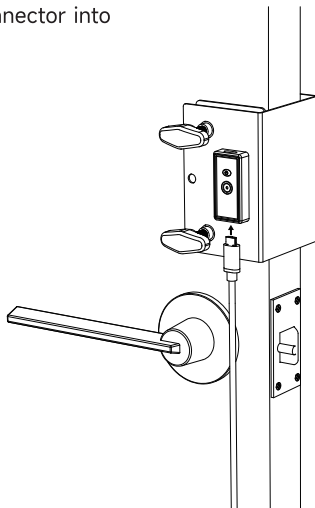

- 7 Use the cable clips to fix the power cord on the door.

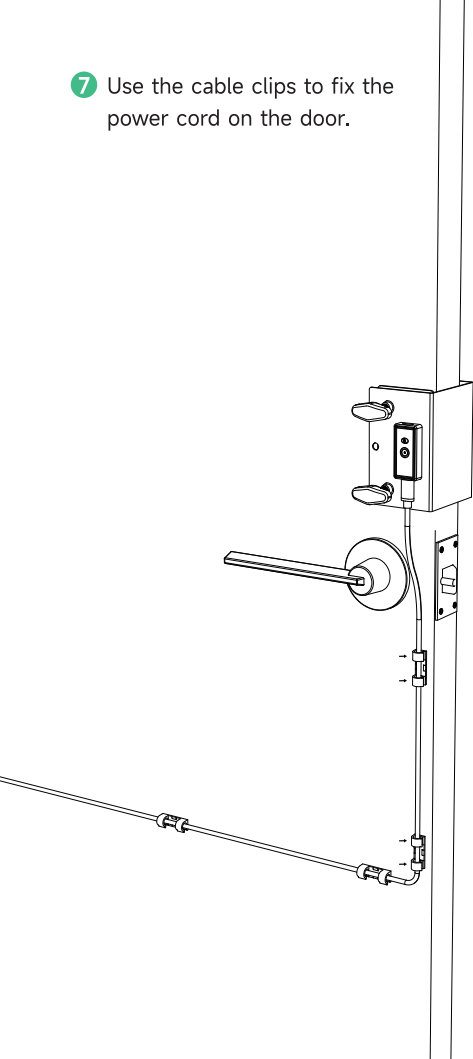


- 8 Plug in the outlet to ensure that the power supply is successfully connected.

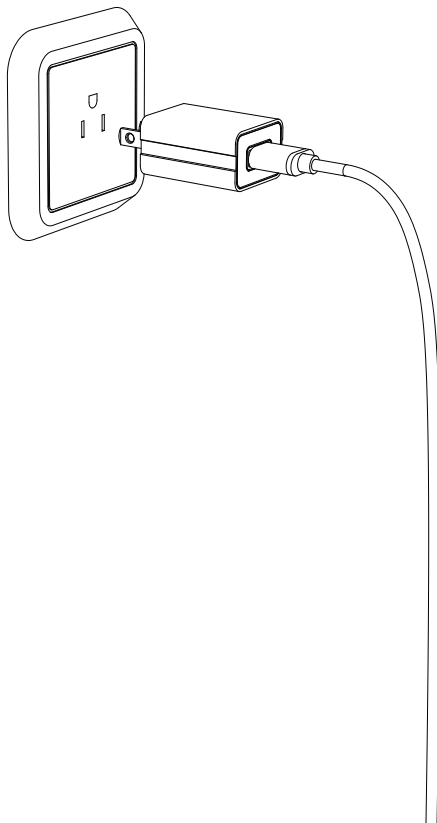

9 Control the button on the charging box to check the status:

- ▶ Blue light flashing for 20 seconds indicates charging;
- ▶ Red light flashing for 20 seconds indicates two cases, one the battery is fully charged, and other is cannot be connected and there is a charging problem(if it is a red light and the battery is low, please email us at: support@olaike.com)

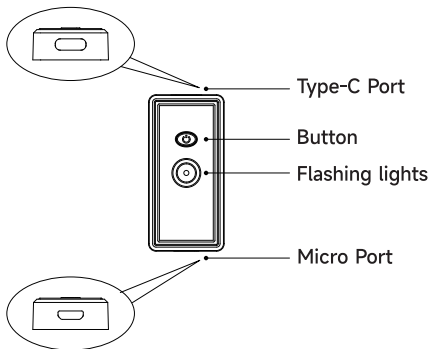

Tips:

- ▶ **Ring Video Doorbell 2nd Gen**(only) need to add auxiliary boards or they will not be charged.
- ▶ **Ring Video Doorbell 2/3/3Plus/4:** The battery is not removable while in use for charging.
- ▶ **Charging Box:** Regardless of the state of the indicator, the indicator flashes for 20 seconds and then turns off.
- ▶ **Screws:** Please use the screws of the corresponding model correctly so as not to affect the experience.

Tutorial video on how to install:

The installation tutorial video has been uploaded to the detail page of Amazon, which can be viewed through the order to enter the product page;

It has also been uploaded to **YouTube** and can be viewed by searching **OLAIKE TV**, or scanning the QR code:

