

## ACCESSORY NIBE™ PCM 40/PCM 42

### Free cooling



## Features of NIBE™ PCM 40/PCM 42

**Elegant and timeless design**

**High flexibility for best indoor climate**

**Passive cooling and hot water production simultaneously**

**Installer-friendly**

**Settings shown on the heat pump's display**

**Compatible with heat pumps in the NIBE F1145/F1245 series**

## NIBE PCM 40/PCM 42

The NIBE PCM accessory gives your installation a high degree of flexibility. It is compatible with the NIBE F1145/F1245 series, which was developed in such a way as to enable all the heat pump's potential applications - both free cooling and hot water production. Combine your heat pump with NIBE PCM for passive / free cooling. It works, even while your system is continually heating hot water.


NIBE PCM is easily controlled via the heat pump's control panel, where both settings and monitoring are easily handled at the push of a button. This accessory's timeless design means that it blends in well with your other heat pump equipment.



# Technical specifications


## NIBE™ PCM 40/PCM 42

| Type                             |      | PCM 40  | PCM 42   |
|----------------------------------|------|---------|----------|
| Height (excl. pipes)             | (mm) | 515     | 635      |
| Width                            | (mm) | 600     | 600      |
| Depth                            | (mm) | 370     | 370      |
| Weight                           | (kg) | 30      | 45       |
| Connection, hot side             | (mm) | 22      | 28       |
| Connection, cold side            | (mm) | 28      | 35       |
| Output, circulation pump         | (W)  | 40 - 70 | 70 - 160 |
| Cooling output                   | (kW) | 2 - 5   | 4 - 9    |
| Intended for heat pump at 0/35°C | (kW) | 5 - 8   | 10 - 17  |




### Dimension

PCM 40

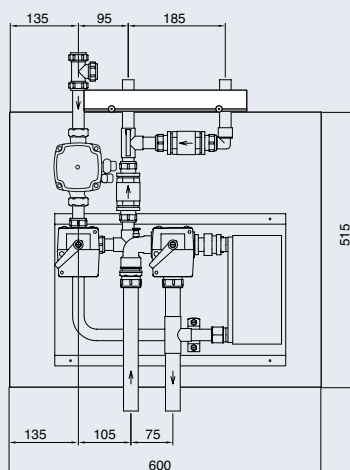


PCM 42

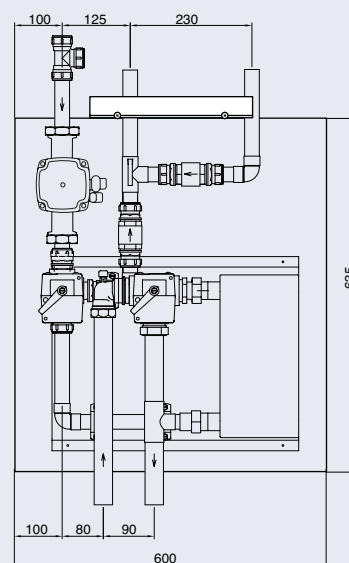

### Capacity diagram

PCM 40

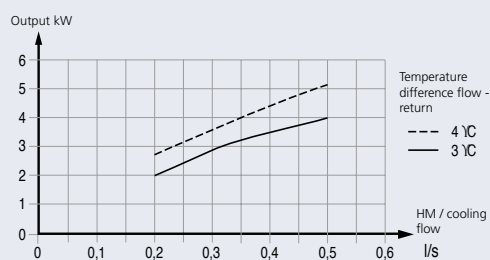

PCM 42

